

1.

Inele - O



2.

Şnur Cauciuc RS



3.

Trusă Inele-O



4.

Inele - X



5.

Şaibe Cauciuc Metal US



DICHTOMATIK

O-Rings

FLUIDIO





DICHTOMATIK




Albert-Schweitzer-Ring 1
D-22045 Hamburg
P.O. Box 70 04 80
D-22004 Hamburg
Phone 040/66 98 90
Fax 040/66 98 91 01
mail@dichtomatik.de
www.dichtomatik.de



DIN EN ISO 9001:2000

Contents

Dichtomatik	5
Dichtomatik in the Internet	6
O-rings	9
Quality assurance information (measuring aids, procedures)	11
Materials	12
Standard elastomers	13
Special elastomers	16
Surface treatments and antifriction	18
Material approval	18
Terms from the materials data sheet	20
Installation housings and design recommendations: Static sealing	24
Dynamic sealing	34
Design guidelines	38
Layout guidelines	40
General installation instructions	41
Back-up rings	42
Standard dimensions: British Standard BS 1806	44
American Standard AS 568 A	44
British Standard metric BS 4518	46
French Standard R	48
Swedish Standard SMS 1586	49
Japanese Standard JIS 240 P+G	50
DIN 3771	52
ISO 3601-1 Series G	54
ISO 3601-1 Series A	56
Dichtomatik dimensions	58
Subsidiaries	109

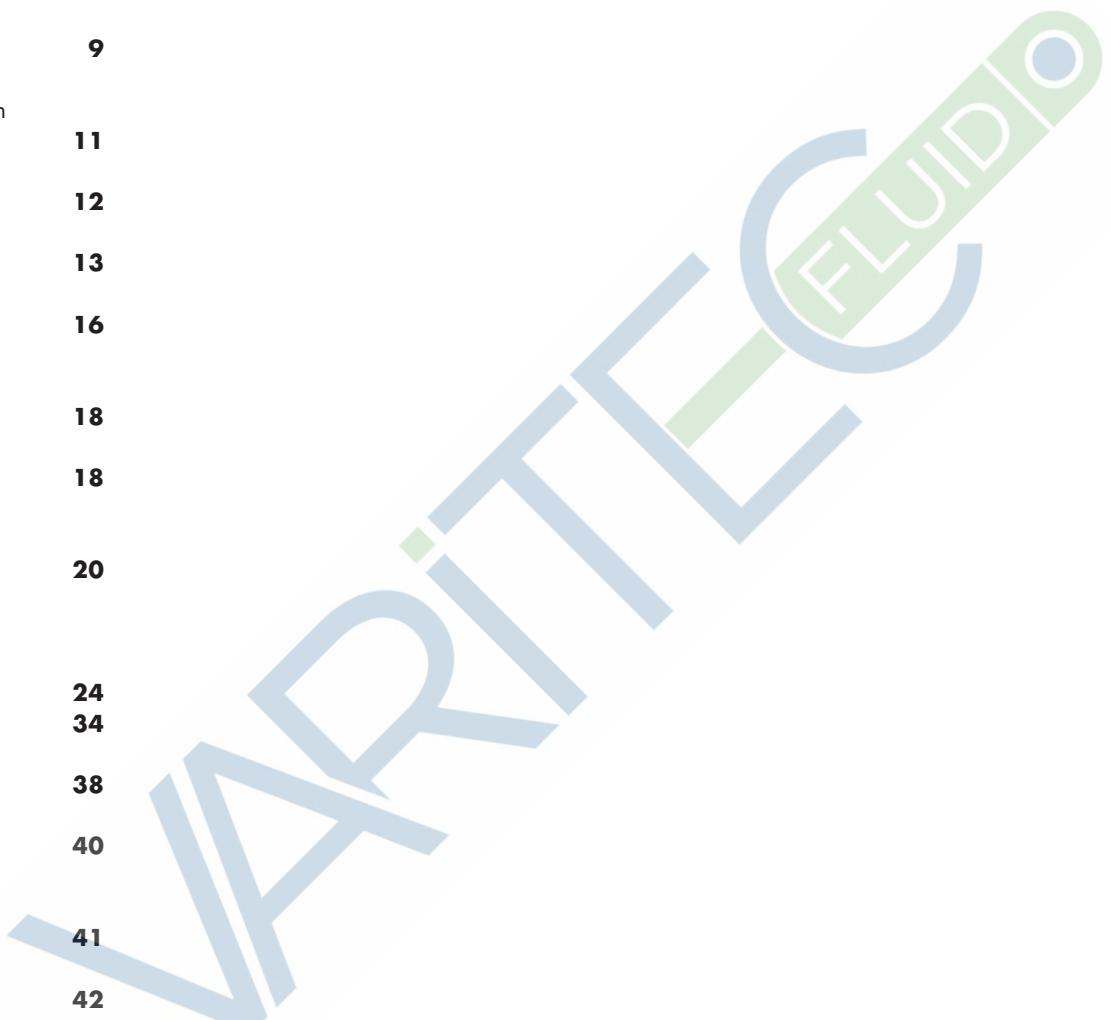

Dichtomatik

Dichtomatik is a company that specialises in technical seals for every application and is renowned for keeping stocks of every kind of standard design, material and size. A highly developed sales organisation guarantees the fastest deliveries, anywhere in the world.

Their collective experience together with Dichtomatik's capabilities ensures that customers have the best possible technical support. This service is provided throughout Dichtomatik's world-wide network with subsidiaries currently in England, Austria, Holland, Sweden, Italy, France, Hungary, the USA and Canada and several offices in Asia.

Special orders, such as those designed and specified by Dichtomatik engineers in conjunction with the customer's designers on the one hand and the supplier's production engineers on the other, are the order of the day.

As a leading customer of its suppliers, our requirements for a fully functioning quality assurance system, materials and product design set the standard.

The product specification is the basis for every order for Dichtomatik seals. It contains the main quality features, the relevant standards, and any specific product requirements. It also contains details of the type and scope of any checks and other information, such as identification and packaging.

For safety reasons, Dichtomatik carries out random in-house checks on all received goods, the frequency and depth of which is determined by the classification of the relevant supplier. This ensures that every Dichtomatik product is of the same unchanging reliability.




Dichtomatik in the Internet

www.dichtomatik.de

The information in this catalogue and the technical data for every single standard Dichtomatik item is also accessible through the Internet. Anyone can find out anything they want to know about us, contact us, send an enquiry, look at our warehouse and check the availability of individual items. And send an order, of course.

In order to gain maximum benefit from Dichtomatik's service when ordering, the prices listed in the Internet are protected against abuse. We issue a secret password to every interested Dichtomatik customer, which can then be used in conjunction with the customer number to access our prices. For example, the valid net prices are automatically displayed when a warehouse enquiry is given. And the next step is the order!


You can reach Dichtomatik from anywhere in the world. At any time.

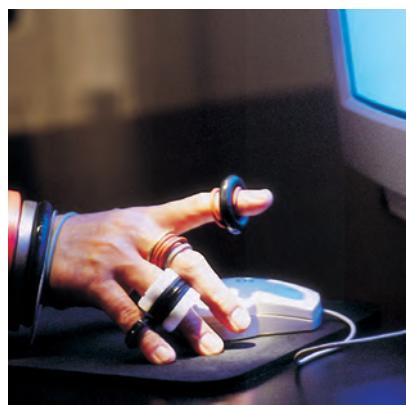

O-rings



O-rings are closed circular sealing elements. The way they work is based on deformation of the cross section. They are made through vulcanisation from form tools as a complete ring.

The simplicity of the shape of an O-ring and the reliability of its function is ingenious, and that is why they are the most frequently used type of seal. They are also economical to manufacture and easy to fit, which makes them unbeatable.

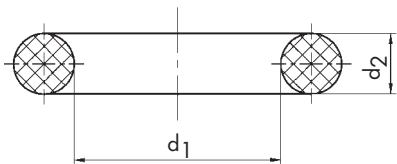

The O-ring designation is given from the dimension of its inner diameter and the cross section thickness in mm, the name of the material and its hardness (elasticity)

e.g. 25 x 1.5 NBR 70



Mode of operation

The sealing function of the installed O-ring is achieved by compression between two or more elements in the sealing gland groove.

When ready to operate, the medium pressure promotes the deformation and increases the sealing effectiveness. If the pressure drops to "zero", the deformation reverts almost to the fitted state.


Applications

We differentiate between the static sealing of non-moving or dynamic sealing in moving machine elements. You will find further details in the chapter entitled "Installation spaces and structural recommendations" on page 24.



Dimensions and tolerances

Basic tolerances for O-rings
DIN ISO 3601 and DIN 3771

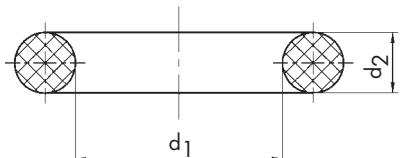


d 1	Tol	d 1	Tol	d 1	Tol
≤ 2.5	± 0.13	75	± 0.66	272	± 2.02
4.5	± 0.14	77.5	± 0.67	280	± 2.08
6.3	± 0.15	80	± 0.69	290	± 2.14
8.5	± 0.16	82.5	± 0.71	300	± 2.21
10.0	± 0.17	85	± 0.73	307	± 2.25
11.2	± 0.18	87.5	± 0.75	315	± 2.3
14	± 0.19	90	± 0.77	325	± 2.37
16	± 0.2	92.5	± 0.79	335	± 2.43
18	± 0.21	95	± 0.81	345	± 2.49
20	± 0.22	97.5	± 0.83	355	± 2.56
21.2	± 0.23	100	± 0.84	365	± 2.62
23.6	± 0.24	103	± 0.87	375	± 2.68
25	± 0.25	106	± 0.89	387	± 2.76
26.5	± 0.26	109	± 0.91	400	± 2.84
28	± 0.28	112	± 0.93	412	± 2.91
30	± 0.29	115	± 0.95	425	± 2.99
31.5	± 0.31	118	± 0.97	437	± 3.07
33.5	± 0.32	122	± 1	450	± 3.15
34.5	± 0.33	125	± 1.03	462	± 3.22
35.5	± 0.34	128	± 1.05	475	± 3.3
36.5	± 0.35	132	± 1.08	487	± 3.37
37.5	± 0.36	136	± 1.1	500	± 3.45
38.7	± 0.37	140	± 1.13	515	± 3.54
40	± 0.38	145	± 1.17	530	± 3.63
41.2	± 0.39	150	± 1.2	545	± 3.72
42.5	± 0.4	155	± 1.24	560	± 3.81
43.7	± 0.41	160	± 1.27	580	± 3.93
45	± 0.42	165	± 1.31	600	± 4.05
46.2	± 0.43	170	± 1.34	615	± 4.13
47.5	± 0.44	175	± 1.38	630	± 4.22
48.7	± 0.45	180	± 1.41	650	± 4.34
50	± 0.46	185	± 1.44	670	± 4.46
51.5	± 0.47	190	± 1.48	>670	$\pm 0.7\%$
53	± 0.48	195	± 1.51		
54.5	± 0.5	200	± 1.55		
56	± 0.51	206	± 1.59	≤ 1.8	± 0.08
58	± 0.52	212	± 1.63	≤ 2.65	± 0.09
60	± 0.54	218	± 1.67	≤ 3.55	± 0.1
61.5	± 0.55	224	± 1.71	≤ 5.3	± 0.13
63	± 0.56	230	± 1.75	≤ 7	± 0.15
65	± 0.58	236	± 1.79	≤ 8	± 0.16
67	± 0.59	243	± 1.83	≤ 10	± 0.18
69	± 0.61	250	± 1.88		
71	± 0.63	258	± 1.93		
73	± 0.64	265	± 1.98		

For intermediate sizes, the next tolerance up is chosen.

The dimensional tolerances of the finished O-ring are achieved by using appropriately designed form tools and allowing for the shrinkage factor of the elastomer. It is often possible to use moulds and elastomers with similar shrinkage; in these cases the tolerances in the above chart do not apply.

The quoted tolerances can be reduced even further by modifying the elastomer and using special manufacturing procedures.


Quality assurance information (measuring aids, procedures)

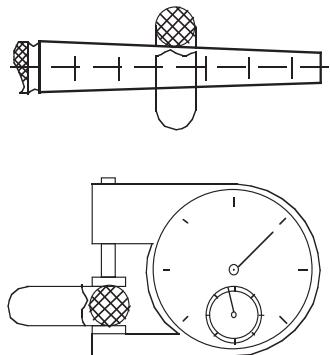


Form and surface deviations

Types of deviation


Offset/mismatch



Flash offset and parting line projection




Backrind




Excessive trimming



Flowmarks



Non-fills and indentation

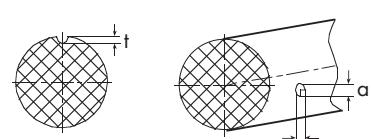

Ideally, the inner diameter ($\varnothing d_1$) is measured by using conical with step barrel gauges. The individual barrel gauges are designed to suit each particular measuring range. A circumferential measuring tape is sufficient for O-rings with an inner diameter of more than 250 mm. Non-contact optical measuring is advised for very small O-rings (less than 1 mm inner diameter).

The cross section of the O-ring ($\varnothing d_2$) is measured with a dial gauge. The contact force between the measuring surfaces should be 1 N.

Shape and surface deviations

Acting in close cooperation with customers and adapting production techniques, Dichtomatik works actively to achieve a product quality with zero faults. However, this is highly labour- and cost-intensive.

DIN 3771 is therefore an attempt to find a balance between economic production and acceptable types of error. Part 4 contains descriptions of these types of error and differentiates between permissible form and surface deviations according to type features N and S given in the following tabel. The size of the permissible error is the difference between the two types.

Dichtomatik's quality standards for O-rings are the same as those in DIN 3771-4 type feature N. The special quality according to type features S and other, more specific requirements can also be offered as the basis for the delivery.

Type features N

Cross section (d_2)

Di.	1.8	2.65	3.55	5.3	7
-----	-----	------	------	-----	---

v	0.08	0.1	0.13	0.15	0.15
---	------	-----	------	------	------

Type features S

Cross section (d_2)

1.8	2.65	3.55	5.3	7
-----	------	------	-----	---

0.08	0.08	0.1	0.12	0.13
------	------	-----	------	------

g	0.1	0.12	0.14	0.16	0.18
---	-----	------	------	------	------

0.1	0.1	0.13	0.15	0.15
-----	-----	------	------	------

e	0.18	0.27	0.36	0.53	0.7
---	------	------	------	------	-----

0.1	0.15	0.2	0.2	0.3
-----	------	-----	-----	-----

t	0.08	0.08	0.1	0.1	0.13
---	------	------	-----	-----	------

0.08	0.08	0.1	0.1	0.13
------	------	-----	-----	------

Deviation from the circular cross section is permitted provided that the resultant

surface is smoothly blended and is within the size tolerance limits for d_2 .

I	0.05 · d_1 or ¹⁾	1.5	1.5	6.5	6.5	6.5
---	-------------------------------	-----	-----	-----	-----	-----

0.03 · d_1 or ¹⁾	1.5	1.5	1	5	5
-------------------------------	-----	-----	---	---	---

t	0.08					
---	------	--	--	--	--	--

0.05					
------	--	--	--	--	--

(radial orientation of flow marks is not permitted)

a	0.6	0.8	1	1.3	1.7	
---	-----	-----	---	-----	-----	--

0.15	0.25	0.4	0.63	1	
------	------	-----	------	---	--

t	0.08	0.08	0.1	0.1	0.13	
---	------	------	-----	-----	------	--

0.08	0.08	0.1	0.1	0.13	
------	------	-----	-----	------	--

¹⁾ the higher value is decisive.

Materials

Dichtomatik offers O-rings in four standard and a wide range of special materials, most of which are elastomers. The starting material for elastomer is caoutchouc, which can be obtained in the form of natural rubber but is nowadays usually used in a synthetic form manufactured by the chemical industry.

Elastomers differ in the basic polymer from which they are made. The following table contains the nomenclature used for elastomers according to DIN ISO 1629 and ASTM D 1418.

Nomenclature for basic polymers

Chemical description

Abbreviation

DIN ISO 1629

ASTM D 1418

acrylonitrile-butadiene rubber
hydrogenated acrylonitrile-butadiene rubber
fluoro rubber
perfluoro rubber
ethylene propylene diene rubber
silicone rubber
fluorosilicone rubber
chloroprene rubber
polyester urethane
polyether urethane
natural rubber
acrylate rubber
styrene-butadiene rubber
ethylene oxide epichlorhydrine rubber
chlorosulfonated polyethylene
butadiene rubber
isoprene rubber
butyl rubber

NBR
(HNBR)
FPM
(FFPM)
EPDM
VMQ
FVMQ
CR
AU
EU
NR
ACM
SBR
ECO
CSM
BR
IR
IIR

NBR
HNBR
FKM
FFKM
EPDM
VMQ
FVMQ
CR
AU
EU
NR
ACM
SBR
ECO
CSM
BR
IR
IIR

() = not listed in the standard

The finished material is created by mixing the basic polymer with the appropriate fillers, softeners, processing aids, curing agents, accelerators and other additives. This process enables us to achieve the specified material properties and offer standard compounds for a wide range of applications as well as special mixtures for highly specialised applications.

The O-ring ultimately achieves its stable shape by the vulcanisation process, in which the plastic rubber mixture changes into a rubber-elastic state and the O-ring acquires its final mechanical properties (hardness, tensile strength, ultimate elongation, compression set etc.).



Standard elastomers

Dichtomatik has a wide range of O-ring sizes in four standard materials in stock:

Dichtomatik standard compounds

Basic elastomer	Abbreviation	Hardness DIN ISO 1629 [Shore A]	Colour	Temp. range [°C]	
				low	high
acrylonitrile-butadiene-rubber	NBR	70 80 + 90	black	-30 -25	100 100 120* 120*
fluororubber	FPM	80	black	-15	200
ethylene propylene-diene rubber	EPDM	70	black	-45	130
silicone rubber (methyl vinyl polysiloxane)	VMQ	70	red-brown	-55	200

*short term


Temperature range and media resistance are primary criteria when choosing a material. Nevertheless, sufficient consideration must be given to the mechanical-technological values of an elastomer mixture as these are decisive for a seal's service life. Dichtomatik's resistance guide provides details of the different elastomer compounds' media resistance.

NBR – acrylonitrile-butadiene rubber / trade name e.g. Perbunan® (Bayer)

NBR is the most common standard material for O-rings because of its good mechanical properties and resistance to mineral oil-based lubricants and greases. These properties are usually determined by the acrylonitrile content (ACN between 18% and 50%). A low ACN content ensures good flexibility at low temperatures, but offers limited resistance to oils and fuels; as the ACN content increases, the low temperature flexibility reduces and the resistance to oils and fuels improves.

The Dichtomatik standard NBR material for O-rings offers an average ACN content to suit a wide range of applications with balanced properties. It has good mechanical-technological values such as high abrasion resistance, as well as low gas permeability and good resistance to mineral oil-based lubricants and greases, hydraulic oils H, H-L, H-LP, non-inflammable pressure liquids HFA, HFB, HFC, aliphatic hydrocarbons, silicone oil and greases, and water to approx. 80°C.

NBR is generally not resistant to aromatic and chlorinated hydrocarbons, fuels with a high aromatic content, polar solvents, glycol-based brake fluids and non-inflammable hydraulic fluids HFD. It also has a low resistance to ozone, weathering and ageing, but in most applications this has no negative effect.

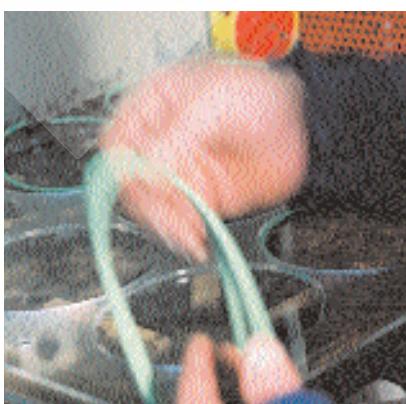

**FPM – fluoro rubber /
trade name e.g. Viton®
(Du Pont-Dow Elastomers)**

FPM materials are noted for their very high resistance to temperatures and chemicals. Other key benefits are its excellent resistance to ageing and ozone, very low gas permeability (excellent for vacuum application) and the fact that it is self-extinguishing.

The standard FPM material for O-rings has excellent resistance to mineral oils and greases, aliphatic, aromatic and chlorinated hydrocarbons, fuels, non-inflammable hydraulic pressure fluids HFD and many organic solvents and chemicals.

In addition to the standard FPM materials, a number of special compounds with different compositions of polymer chains and varying fluorine contents (65% to 71%) are developed for special applications.

FPM is generally not resistant to hot water, steam, polar solvents, glycol-based brake fluids and low-molecular organic acids.

**EPDM – ethylene propylene
diene rubber /
trade name e.g. Nordel®,
(Du Pont-Dow Elastomers)**

EPDM materials generally have a high resistance to hot water, steam, ageing and chemicals, and are suitable for a wide range of temperature applications. They are divided into sulphur- and peroxide-cured types. Peroxide-cured compounds are suitable for higher temperature ranges and have a much lower compression set.

EPDM has a good resistance to hot water and steam, detergents, caustic potash solutions, sodium hydroxide solutions, silicone oil and greases, many polar solvents, many diluted acids and chemicals. Special qualities are recommended for glycol-based brake fluids. EPDM materials are totally unsuitable for use with all mineral oil products (lubricants, fuels). They can be used between -45°C and +130°C (peroxide-cured -50°C to +150°C).

**VMQ – silicone rubber /
trade name e.g. Silopren®
(Bayer)**

Silicone rubbers are noted for its wide thermal range and excellent resistance to ozone, weathering and ageing. Compared with other elastomers, silicone's mechanical properties are on the low side. Generally, silicone materials are physiologically harmless; they are also used by the food and medical industries.

The standard silicone material can be applied at temperatures from -55°C to +200°C and is resistant to water (up to 100°C), aliphatic engine and transmission oils, animal and plant oils and fats.

Silicone is generally not resistant to fuels, aromatic mineral oils, steam (short term up to 120°C possible), silicone oils and greases, acids and alkalis.



Comparison of several elastomer properties


Properties	Materials									
	NBR	FPM	EPDM sulphur	EPDM peroxide	VMQ	HNBR	FFPM	FVMQ	CR	AU / EU
Compression set	1	1	3	1	2	1	3	2	2	3
Tear strength	2	2	3	2	4	1	2	3	2	1
Abrasion resistance	2	2–3	2	2	4	2	3	3	2	1
Ageing resistance	4	1	2	2	1	2	1	1	2	1
Ozone resistance	4	1	2	2	1	2	1	1	2	1
Resistance to oil and grease	2	1	5	5	3	2	1	2	3	2
Fuel resistance	4**	2**	5	5	4	3	1	2	3	3
Resistance to hot water [°C]	80**	80**	130	150	100	100**	***	100	80	50
Resistance to steam [°C]	–	–	130	175	120*	–	***	120*	–	–
Heat resistance standard materials [°C]	100	200	130	150	200	150	260	175	100	100
Heat resistance special materials [°C]	120	–	–	–	250	–	330	–	–	–
Low temperature resistance standard materials [°C]	-30	-15	-45	-50	-55	-30	-15	-55	-40	-40
Low temperature resistance special materials [°C]	-50	-35	–	–	–	-40	-35	–	-50	–

1 = very good / 2 = good / 3 = average / 4 = low / 5 = weak

* = short term / ** = better result only with special compound /

*** = depends on compound



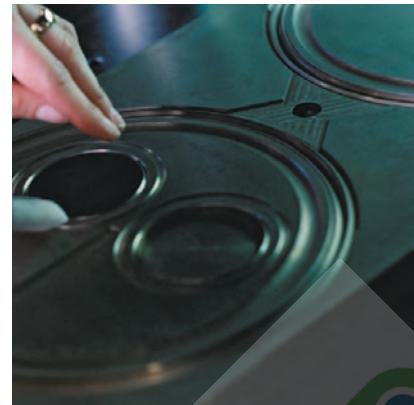

Special elastomers

HNBR – hydrogenated acrylonitrile-butadiene rubber / trade name e.g. Therban® (Bayer)

HNBR is obtained by fully or partly hydrogenating NBR. It leads to considerable improvement of the resistance to heat, ozone and ageing, and gives it very good mechanical properties. The media resistance compares to that of NBR.

FFPM – perfluoro rubber / trade name Kalrez® (Du Pont-DowElastomers)

The chemical and heat resistance of perfluoro elastomers are similar to those of PTFE. They combine the positive properties of PTFE with the elastic behaviour of FPM. Because this material group is considerably more expensive, perfluoro elastomers are only used if other materials cannot meet the specifications and if safety requirements justify the higher expenditure.

Typical applications for perfluoro elastomers include the chemical, oil and semi-conductor industries, high-vacuum technology, and the aerospace industry.

FVMQ – fluorosilicone rubber / trade name e.g. Silastic LS® (Dow Corning)

Although fluorosilicone elastomers have the same mechanical properties as silicone, they are far more resistant to oils and fuels. The temperature range of applications is somewhat more restricted than that of silicone.

CR – chloroprene rubber / trade name e.g. Neoprene® (Du Pont-Dow Elastomers)

Chloroprenes have excellent resistance to ozone, ageing and weathering and also good mechanical properties. They have average resistance to mineral oils, and are suitable for use with many refrigerants.

AU – polyester urethane EU – polyether urethane Polyurethane / trade name e.g Desmopan® (Bayer)

Polyurethanes differ from classic elastomers in that they have much higher mechanical properties for example a high resistance to abrasion, wear and extrusion, a high tensile strength and tear resistance. The material is resistant to ageing and ozone, and can be used with mineral oils and greases, silicone oils and greases, non-inflammable fluids HFA and HFB and water up to of 50°C, as well as pure aliphatic hydrocarbons.

SBR – styrene-butadiene rubber / trade name e.g. Buna Hüls® (Hüls)

SBR is used in glycol-based brake fluids, water, alcohols, glycols, silicone oils and greases. The temperature application range is from -50°C to +100°C.



TFE/P – tetrafluoroethylene-propylene rubber / trade name e.g. Aflas® (3M)

TFE/P is a relatively new addition to the group of fluoroelastomers and is noted for its excellent thermal (0°C to +200°C) and chemical resistance. It is particularly suitable for use in hot water, steam, acids, alkaline solutions, ammonia, amines, alloyed engine and transmission oils, brake fluids (based on glycol, mineral oil and silicone oil), crude oil, sour gas.

ACM – acrylate rubber

ACM is used mainly by the automotive industry as it is resistant to engine, transmission and ATF oils even at high temperatures. The temperature application range is from -20°C to +150°C.

NR – natural rubber

Natural rubber is still obtained from the latex of certain plants. Vulcanised natural rubber has good low-temperature and mechanical properties and a high elasticity. NR vulcanised materials are resistant to water, glycols, alcohols, glycol-based brake fluids, silicone oils and greases and diluted acids and bases. The temperature application range is from approx. -50°C to +80°C.

PTFE O-rings, PTFE-encapsulated O-rings PTFE – polytetrafluoroethylene

PTFE is a fluorinated plastic material. It is noted for its almost universal resistance to chemicals, wide temperature range (-100°C to +250°C), extremely low coefficient of friction, physiological suitability and almost unlimited resistance to ozone, weathering and ageing.

Solid PTFE O-rings are far less elastic than elastomer O-rings, which means they are difficult to install (the installation space usually has to be split), and they tend to "flow", especially at high temperatures. This is why slotted PTFE O-rings and PTFE-encapsulated elastomer O-rings are used. The position of the gap (pure PTFE O-rings) or of the joint or overlap (PTFE-encapsulated O-rings) is determined here, depending on the particular application.

FEP-encapsulated O-rings FEP – fluorinated ethylene-propylene

FEP is a thermoplastic material with similar properties to PTFE. Seamless FEP-encapsulated O-rings have an elastic core in FPM or VMQ. They are used at very high thermal and chemical loads. The extremely high chemical resistance of the cover protects the elastic core material against the chosen medium. Another advantage of the cover is its very low coefficient of friction.

This results in a combination of very high chemical and thermal load-bearing ability and the elastic properties of standard commercial elastomers. The core material is chosen to suit the temperature range and medium.

Because of its limited flexibility, great care is required during installation. Warming the material in water or oil to between approx. 80°C and 100°C increases flexibility and supports the installation.

Depending on the core material, the temperature application range is from -55°C to +200°C.

Surface treatments, and antifriction

The typical properties of elastomer materials include the "good gripping" and "sticky" surface. The friction that occurs in certain applications and during the fitting of O-rings (particularly with automatic supply) may be a disadvantage. Friction can be reduced by different antifriction treatments as an aid to installation and to increase the service life. Possibilities include:

Short-term antifriction treatment, e.g. to aid installation, by surface treatment with:

- silicone oil
- graphite
- molybdenum disulfide (MoS_2)
- talcum powder.

Long-term antifriction treatment is achieved by

- halogenating (fluorinating)
- PTFE coating
- applying dry lubricants to the surface

Long-term friction reduction is achieved by incorporating a slide-intensifying additive in the elastomer mix, such as molybdenum disulphide (MoS_2) or PTFE.

Dichtomatik's application engineers are pleased to assist with choosing the suitable process.

"Labs-free" O-rings

"Labs-free" means that the O-rings are free from substances which interfere the lacquering process. The requirement "labs-free" includes "silicone-free" and goes beyond that. "Labs-free" O-rings are used primarily in automotive industry lacquering plants. Particles that disturb the lacquering process such as silicones, greases, wax etc. cause crater-shaped pitting on wet paint. Customer test requirements apply. Please contact us if you have a demand for "labs-free" O-rings.

Material approval

In addition to the usual requirements that apply for O-ring materials, special verification or approval may be required to confirm that a material is suitable for a specific application. Control and monitoring are very important if the seals are to be used in safety-technical, food or medical applications. Approval is required for use in the following applications:


- gas installation, gas equipment, gas supply
- drinking water fittings and supply
- food industry
- oxygen applications
- fire protection

Material approval is issued by recognised laboratories, authorised scientific-technical associations and state bodies. Sadly, most of the approvals are based on national rules, and even within Europe are rarely recognised by other member states. This means that even a material that is being used in similar or identical applications may need to be approved a number of times.

Summary of a number of material approvals:

Approval	Country	Application	Standard
DVGW Deutscher Verein des Gas und Wasserfaches e.V.	D	gas	DIN EN 549 (DIN 3535 T1+2) DIN 3535 T3
KTW (DVGW)	D	drinking water	KTW guidelines
BAM Bundesanstalt für Materialforschung und -prüfung	D	oxygen	BAM guidelines
BGA Bundesgesundheitsamt	D	food	BGA-guidelines
acc. to EN 681-1	EU	water supply and disposal	EN 681-1
WRC Water Research Council	GB	drinking water	BS 6920
FDA Food and Drug Administration	USA	food	Title 21 item 177.2600
NSF National Sanitary Foundation	USA	drinking water	Standard 61
UL Underwriter Laboratories	USA	fire protection	UL 94
KIWA	NL	drinking water	BRL 2013
ACS	F	drinking water	AFNOR XP 41-210/1/1/3

Dichtomatik carries O-rings made from materials with almost every current approval. Because of the variety and constantly changing number of approvals, we have decided against listing them individually, but do please ask for specific information. If we do not happen to have the approval that you require, we will immediately establish whether it is possible to apply for it.

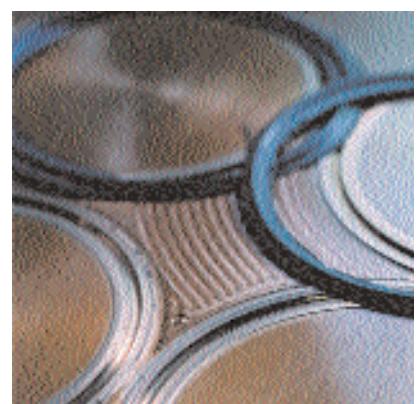

Terms from the materials data sheet

Elastomer materials are subject to strict quality controls throughout the manufacturing process. The appropriate tests are carried out on the caoutchouc or raw materials, and on the vulcanised rubber to monitor the manufacturing process. The characteristic properties of the vulcanised material are listed in the material data sheet.

The results given in the data sheet were obtained on standard test specimens following standard test procedures. Comparisons with results obtained on finished products, e.g. O-rings, will produce other results due to the different geometry, but these results will not necessarily contravene the contents of the data sheet. The following is an explanation of the main terms:

Hardness

The hardness of elastomer materials can be tested to Shore A or D (DIN 53505) or by indentation hardness to IRHD (DIN 53519 sheets 1 and 2). Shore A is the most frequently used test method, and IRHD micro hardness testing for smaller cross sections.

In both cases the hardness is the resistance of the elastomer test piece to the penetration of an indentor (a truncated cone for Shore A, and a sphere for micro IRHD) applied under a defined test load. The hardness is determined by the appropriate test equipment on standard test pieces and documented in data sheets. Because of the different geometry, the hardness test results obtained on a finished O-ring may differ from those of a standard test piece.

Tensile strength, ultimate elongation

The tensile test is described in DIN 53504. A standard test piece is stretched to rupture. The tensile strength is the maximum tensile stress in stretching a specimen to rupture.

The ultimate elongation is the elongation at which rupture occurs in the application of continued tensile stress.

Because of the different geometry of a finished O-ring compared with a test specimen, the values for tensile strength and breaking elongation on a finished O-ring may be less. This factor is to be taken into account when assessing the suitability of small O-rings for assembly over large diameters.

Tear resistance

Tear resistance is a measure of stress needed to continue rupturing a test specimen after a defined initiating cut. The tear resistance test is described for two different test pieces in DIN 53507 and DIN 53515. The value thereby obtained can be used to estimate an elastomer's sensitivity to further growth of damage in the case of a cut.



Low temperature

The mechanical properties of elastomers change as the temperature drops. Thus, for example, hardness and tear resistance increase whereas ultimate elongation reduces. From a particular temperature onwards, the material then becomes so hard and brittle that under load, it will crack like glass. If no mechanical load is applied to the frozen material (e.g. in storage), it will regain its original properties once warmed.

Various tests are available for assessing cold flexibility. Frequently used values are the brittleness point acc. to DIN 53546 and the TR10 temperature acc. to ASTM D 1329. These figures can be interpreted to draw conclusions regarding the practical low-temperature limit.

Compression set

Depending on the compound, time, temperature and initial deformation, elastomers show a certain "flow", a proportion of plastic deformation, in addition to their elastic behaviour. An item that has been installed in a housing for a certain period of time will not return completely to its original shape after removal, but will retain a certain amount of permanent deformation.

Compression set is tested to DIN 53517 or ASTM D 395 B, and will be somewhere between 0% and 100%; 0% is the ideal, and 100% the worst possible result. Compression set is calculated thus:

$$DVR = \frac{d_0 - d_2}{d_0 - d_1} \times 100$$

d_0 = the original thickness of the test specimen

d_1 = the thickness of the test specimen once deformed

d_2 = the thickness of the test specimen after relaxation

When assessing the value for the compression set it is important to observe the test parameters precisely. The same material can, for example, achieve better or worse results due to a change in temperature in the test. The same applies to the duration of the test.

Changes in properties after ageing

In order to assess the ageing behaviour and the materials' suitability for use in specific media, the changes in their properties are established after storage in these media.

DIN 53508 describes accelerated ageing in air. The determination of the resistance to liquids, vapours and gases is described in DIN 53521. The properties that are assessed are, for example, the absolute change in hardness and percentage change of tensile strength, ultimate elongation and volume in relation to the values of the unaged test specimen.

Storage of Elastomer products

Elastomers are generally easy to store. They retain almost exactly their original properties for several years, providing certain minimum storage criteria are observed. Those are described in standards DIN 7716 and ISO 2230.

It is important that seals are stored stress-free, without any tension, compression or deformation.

The elastomer seals should be protected from any intensive circulation of air. Storing the seals in the original packaging (e.g. polyethylene bags) or storing the seals in air-tight containers is recommended.

The storing room should be cool, dry, dustfree and ventilation should be moderate.

A constant storage temperature is recommended. It should not be lower than -10°C and not higher than $+20^{\circ}\text{C}$. Radiators in storage areas should be covered and kept a minimum of 1m from the stored goods.

The relative humidity should not exceed 65%. Strong light influence, especially uv-radiation as well as direct sun light should be avoided.

Electrical equipment that creates ozone should not be placed in areas where elastomers are stored.



Installation housings and design recommendations

The installation housings (grooves) for O-rings should if possible be produced with right angles. The dimensions for the required depth and width depend on the particular application and cross-section. The dimensions are recommendations for the particular type of installation, and refer to the nominal sizes. They should be observed because the sealing function depends on the precise execution of the grooves.

Static sealing



O-rings are ideal for sealing resting machine elements. We speak of a static or resting seal when the machine elements that are to be sealed do not move in relation to each other. If the groove is executed correctly, the items used as intended and the right material chosen, O-rings can seal pressures of up to 1000 bar.

(Back-rings may also be required.)

Rectangular groove by radial deformation

This type of sealing is the preferred choice for sealing pins, bolts, tube connections or cylindrical tubes. The O-ring section is deformed radially on installation, i.e. in the direction of the centre of the bolt/pipe. The position of the groove, whether on the inside or the outside, does not play a functional part on solid components, but depends on the processing and installation possibilities. On thin walled parts where elastic deformation could occur such as with a cylindrical pipe, the groove should be on the fixed outer part (cylinder bottom) so that the groove on the side that is not subject to pressure does not increase as the item opens out.



Static sealing, internal sealing, rectangular groove by radial deformation

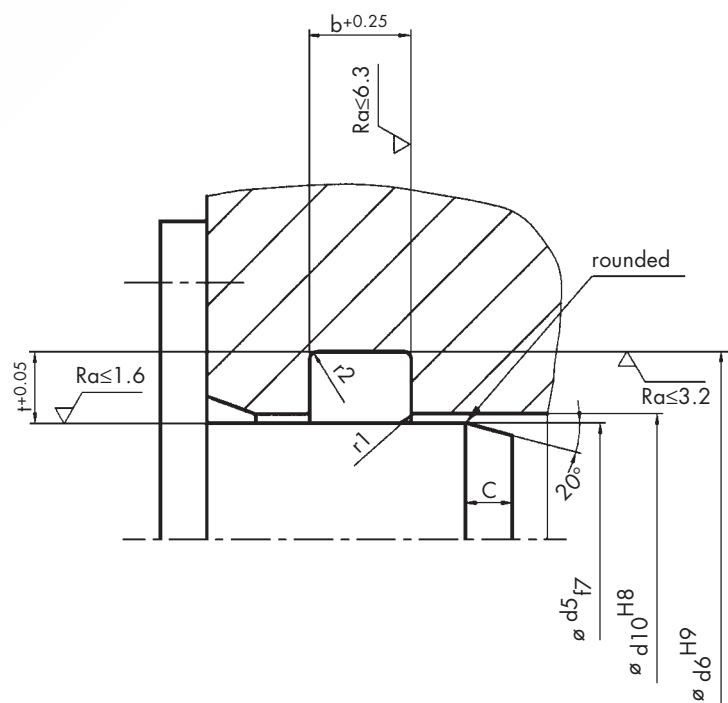

Groove dimensions

	d2	Groove depth t +0.05	Groove width b+0.25	Lead-in chamfer C	d2	Groove depth t +0.05	Groove width b+0.25	Lead-in chamfer C
	1	0.75	1.3	1.2	4	3.2	5.2	3
	1.2	0.9	1.6	1.2	4.3	3.4	5.6	3
	1.25	0.9	1.7	1.2	4.5	3.6	5.8	3
	1.3	1	1.7	1.2	5	4	6.5	3
	1.5	1.1	2	1.5	5.3	4.3	7	3
	1.6	1.2	2.1	1.5	5.33	4.3	7.1	3.5
	1.78	1.3	2.4	1.5	5.5	4.5	7.2	3.5
	1.8	1.3	2.4	1.5	5.7	4.6	7.6	3.5
	1.9	1.4	2.5	1.5	6	4.9	7.9	3.5
	2	1.5	2.6	2	6.5	5.4	8.4	4
	2.2	1.7	3	2	6.99	5.8	9.2	4
	2.4	1.8	3.2	2	7	5.8	9.3	4
	2.5	1.9	3.3	2	7.5	6.3	9.8	4
	2.6	2	3.4	2	8	6.7	10.5	4
	2.62	2	3.5	2	8.4	7.1	10.9	4.5
	2.65	2	3.6	2	8.5	7.2	11	4.5
	2.7	2.1	3.6	2	9	7.7	11.7	4.5
	2.8	2.2	3.7	2	9.5	8.2	12.3	4.5
	3	2.3	3.9	2.5	10	8.6	13	5
	3.1	2.4	4	2.5	10.5	9	13.8	5
	3.5	2.7	4.6	2.5	11	9.5	14.3	5
	3.53	2.7	4.7	2.5	12	10.5	15.6	5
	3.55	2.8	4.7	2.5	15	13.2	19.2	5
	3.6	2.8	4.8	2.5				
	3.7	2.9	4.9	2.5				

Static sealing, external sealing,
rectangular groove by
radial deformation

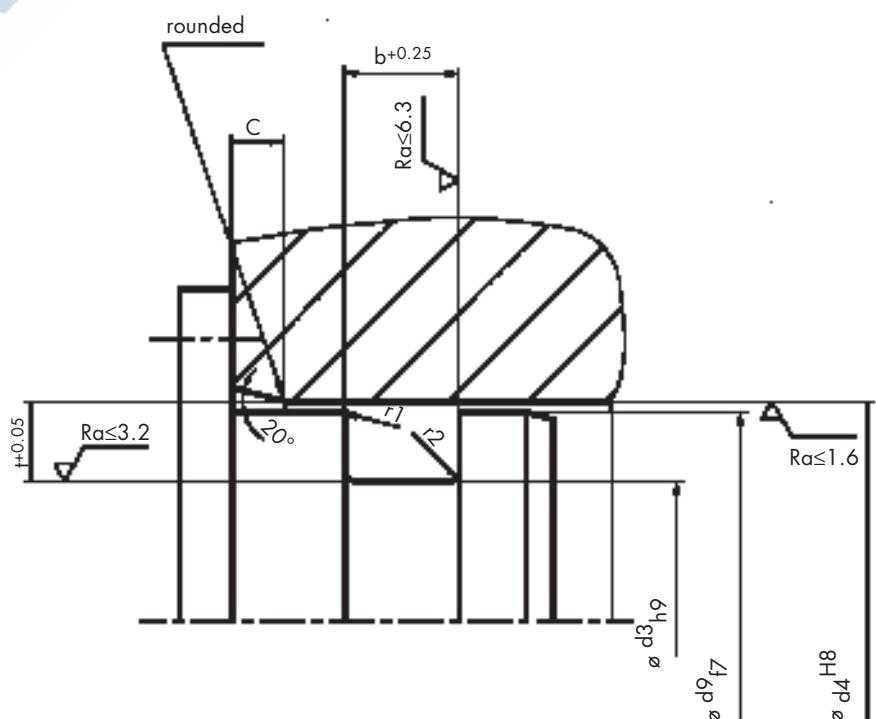

Rectangular groove by axial deformation

This type of installation is used primarily for flange and cover sealing. The O-ring cross section is deformed axially.


Note that the O-ring should be placed against the non-pressure side of the groove on installation in order to prevent it from moving in the groove when pressure is applied or increases.

If the O-ring moves in the groove, it will be stretched and compressed, which causes material fatigue and premature wear. Observing the pressure direction will prevent the surface of the O-ring from possibly rolling, and thus being destroyed.


■ If pressure is applied from the inside, the outer diameter of the O-ring should be placed against the outer diameter of the groove, or else be up to max. 3% bigger (the O-ring will be compressed).

■ If pressure is applied from the outside, the inner diameter of the O-ring should be placed against the inner diameter of the groove or else be up to max. 6% smaller (the O-ring will be stretched).

When the item is intended for axial installation, the cover screwing should be very strongly designed to ensure that the gap between the sealed surfaces never exceeds the permitted size. The pressure could otherwise squeeze out the O-ring.




**Static sealing,
pressure from inside,
rectangular groove by
axial deformation**

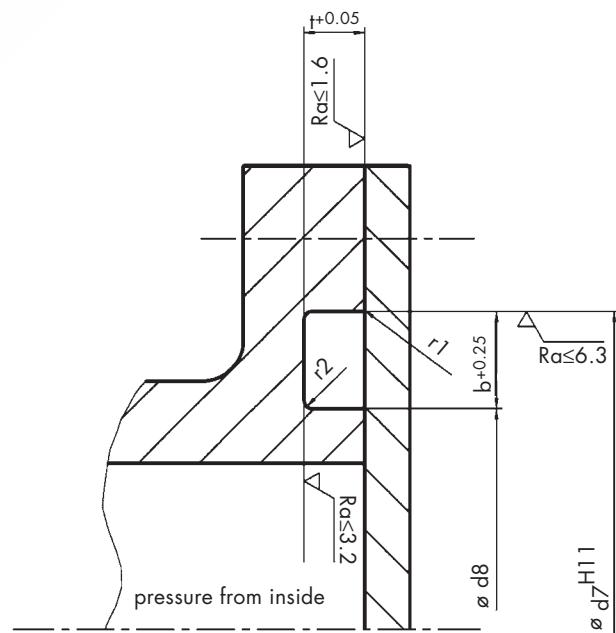

Groove dimensions

d2	Groove depth t+0.05	Groove width b+0.25	d2	Groove depth t+0.05	Groove width b+0.25
1	0.7	1.4	4	3.1	5.5
1.2	0.9	1.6	4.3	3.3	5.9
1.25	0.9	1.7	4.5	3.5	6.1
1.3	1	1.7	5	4	6.7
1.5	1.1	2.1	5.3	4.2	7.2
1.6	1.2	2.2	5.33	4.2	7.3
1.78	1.3	2.5	5.5	4.5	7.4
1.8	1.3	2.6	5.7	4.6	7.6
1.9	1.4	2.7	6	4.8	8.1
2	1.5	2.8	6.5	5.3	8.6
2.2	1.6	3.1	6.99	5.7	9.7
2.4	1.8	3.3	7	5.7	9.7
2.5	1.9	3.5	7.5	6.2	10.1
2.6	2	3.6	8	6.6	10.7
2.62	2	3.7	8.4	7.1	11.1
2.65	2	3.8	8.5	7.2	11.3
2.7	2.1	3.8	9	7.6	12
2.8	2.1	4	9.5	8.1	12.5
3	2.3	4.1	10	8.5	13.6
3.1	2.4	4.2	10.5	8.9	14
3.5	2.7	4.8	11	9.4	14.7
3.53	2.7	4.9	12	10.4	15.7
3.55	2.7	5	15	13.2	19.4
3.6	2.8	5.1			
3.7	2.9	5.2			

**Static sealing,
pressure from outside,
rectangular groove by
axial deformation**


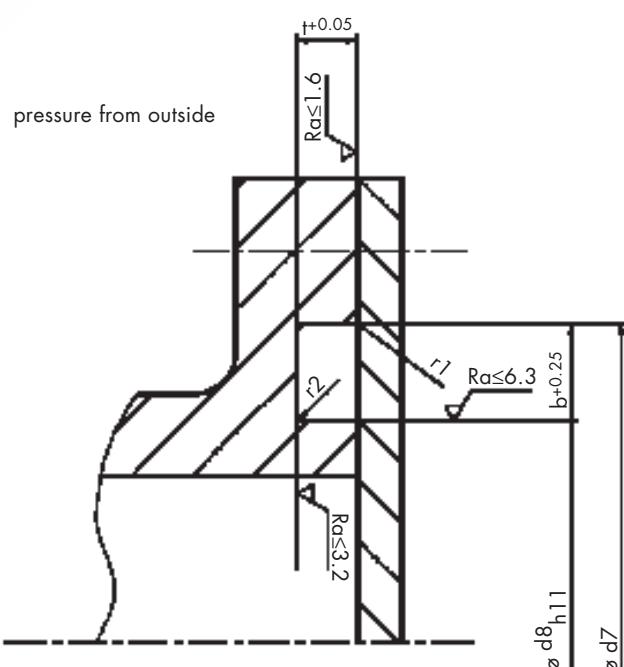


Trapezoidal groove

Trapezoidal grooves are difficult and expensive to manufacture. This groove geometry is only worthwhile if the O-ring needs to be held in the groove during assembly, for the application and removal of compression moulding tools, or for overhead installations.


A trapezoidal groove is really only advisable for cross sections of 2 mm and more. The average groove diameter equates to the inner diameter plus the cord thickness of the O-ring.

Static sealing, trapezoidal groove

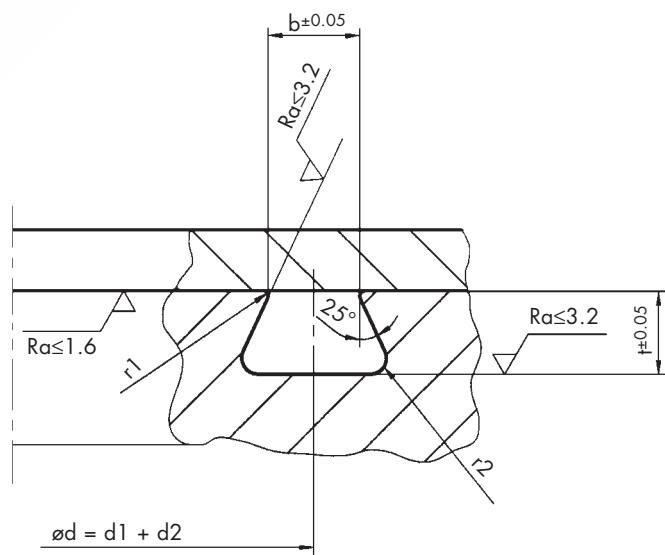


Groove dimensions

d2	Groove depth $t \pm 0.05$	Groove width $b \pm 0.05$	r2	r1
2	1.5	1.6	0.4	0.25
2.2	1.6	1.7	0.4	0.25
2.4	1.8	1.9	0.4	0.25
2.5	2	2	0.4	0.25
2.6	2.1	2.1	0.4	0.25
2.62	2.1	2.1	0.4	0.25
2.65	2.1	2.1	0.4	0.25
2.7	2.2	2.1	0.4	0.25
2.8	2.3	2.2	0.4	0.25
3	2.4	2.4	0.4	0.25
3.1	2.5	2.5	0.4	0.25
3.5	2.8	2.9	0.8	0.25
3.53	2.8	2.9	0.8	0.25
3.55	2.8	2.9	0.8	0.25
3.6	2.9	3	0.8	0.25
3.7	3	3.1	0.8	0.25
4	3.2	3.3	0.8	0.25
4.3	3.3	3.6	0.8	0.25
4.5	3.7	3.7	0.8	0.25
5	4.2	4	0.8	0.25
5.3	4.6	4.2	0.8	0.4
5.33	4.6	4.2	0.8	0.4
5.5	4.7	4.4	0.8	0.4
5.7	4.9	4.5	0.8	0.4
6	5.1	4.7	0.8	0.4
6.5	5.6	5.1	0.8	0.4
6.99	6	5.6	1.6	0.4
7	6	5.6	1.6	0.4
7.5	6.4	6.1	1.6	0.4
8	6.9	6.3	1.6	0.4
8.4	7.3	6.7	1.6	0.5
8.5	7.4	6.8	1.6	0.5
9	7.8	7.2	1.6	0.5
9.5	8.2	7.7	1.6	0.5
10	8.7	8	1.6	0.5

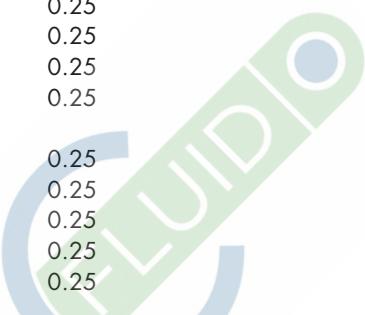


Conical groove

In individual cases involving screwed flange and cover sealing design, requirements may call for a conical groove. However, with this particular groove geometry it can be difficult to ensure a defined deformation of the O-ring. Furthermore, the restricted space of a conical groove can be disadvantageous if the surrounding media then cause the O-ring to swell.

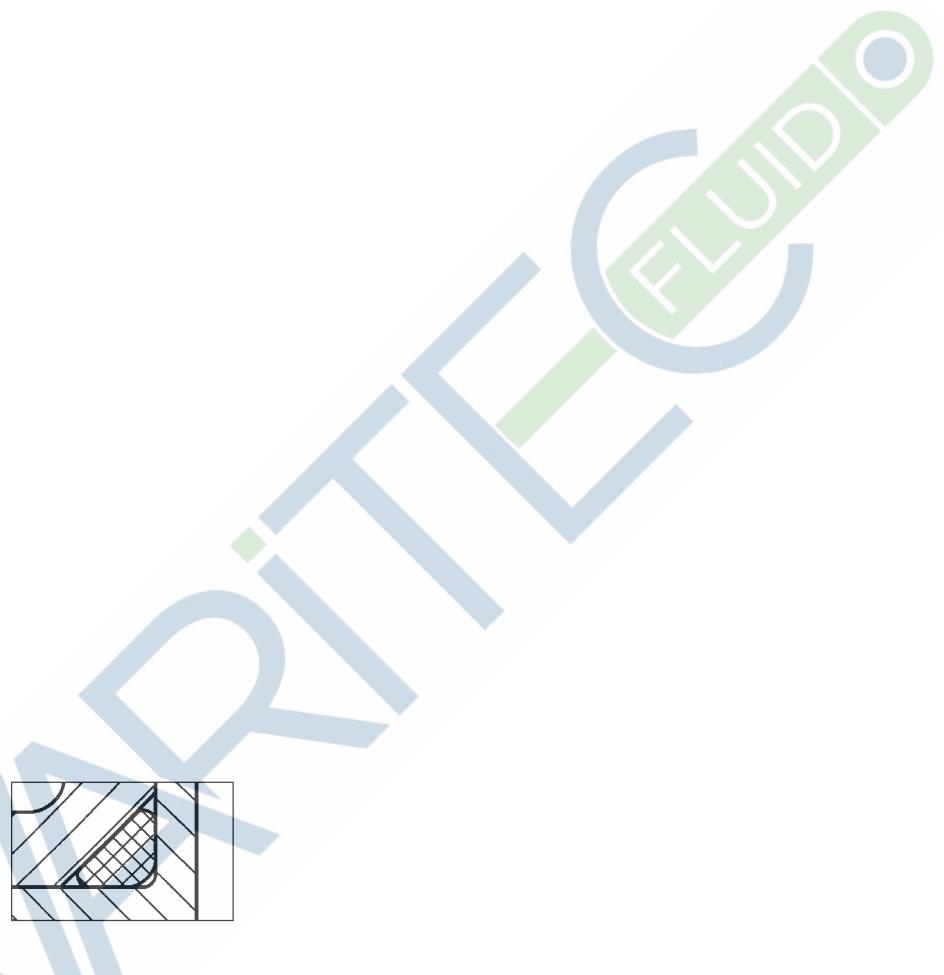

Static sealing,
conical groove

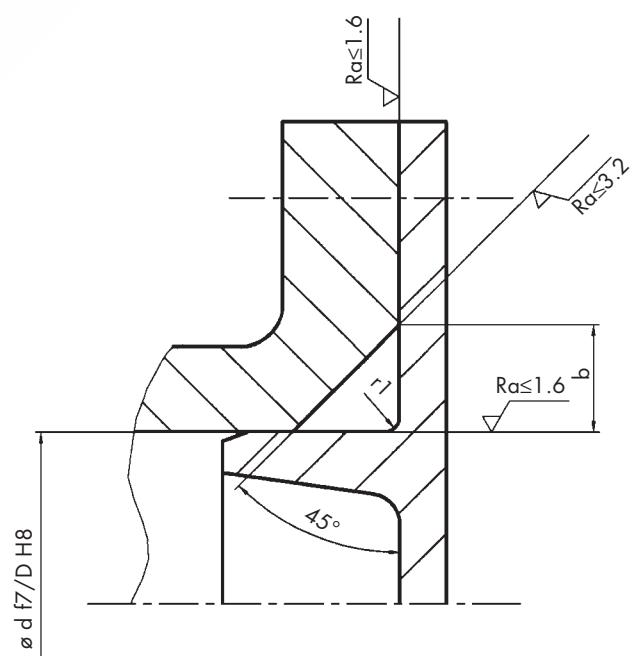

Groove dimensions

	d2	Side length b	Tolerance (+) r1
	1	1.45	0.1
	1.2	1.7	0.1
	1.25	1.75	0.1
	1.3	1.8	0.1
	1.5	2.1	0.1
	1.6	2.15	0.1
	1.78	2.4	0.1
	1.8	2.45	0.1
	1.9	2.6	0.1
	2	2.75	0.1
	2.2	3	0.1
	2.4	3.25	0.15
	2.5	3.4	0.15
	2.6	3.55	0.15
	2.62	3.6	0.15
	2.65	3.6	0.15
	2.7	3.7	0.15
	2.8	3.8	0.15
	3	4.1	0.2
	3.1	4.25	0.2
	3.5	4.8	0.2
	3.53	4.8	0.2
	3.55	4.85	0.2
	3.6	4.9	0.2
	3.7	5.05	0.2
	4	5.5	0.2
	4.3	5.9	0.2
	4.5	6.15	0.2
	5	6.85	0.25
	5.3	7.25	0.25
	5.33	7.3	0.25
	5.5	7.55	0.25
	5.7	7.8	0.25
	6	8.2	0.3
	6.5	8.9	0.3
	6.99	9.6	0.3
	7	9.6	0.3
	7.5	10.3	0.3
	8	11	0.4
	8.4	11.55	0.4
	8.5	11.7	0.4
	9	12.4	0.4
	9.5	13.05	0.4
	10	13.7	0.4
	10.5	14.4	0.4
	10	15.1	0.4
	12	16.5	0.5
	15	20.6	0.5



FLUID

Vacuum sealing

Vacuum sealing is a special kind of static O-ring sealing. In this type, the system pressure that is to be sealed is less than the atmospheric pressure ($p_{\text{atm}} = 1.01325 \text{ bar}$).

Contrary to the general installation guidelines for static O-ring sealing, the following recommendations apply for vacuum sealing:

■ The groove should be almost 100% filled by the deformed O-ring. This creates greater contact surfaces and increases the diffusion time through the elastomer material.


■ The deformation of the O-ring section should be about 30%.

■ A vacuum grease should be used (reduces leakage).

■ The surface quality (roughness depth) of the groove and sealed surfaces should be considerably better than of standard static sealing, and the percentage contact area should be $t_p > 50\%$.


■ The chosen elastomer should be gas compatible, have low permeability and a low compression set. We recommend fluoro rubber for standard applications.

Static sealing, vacuum sealing

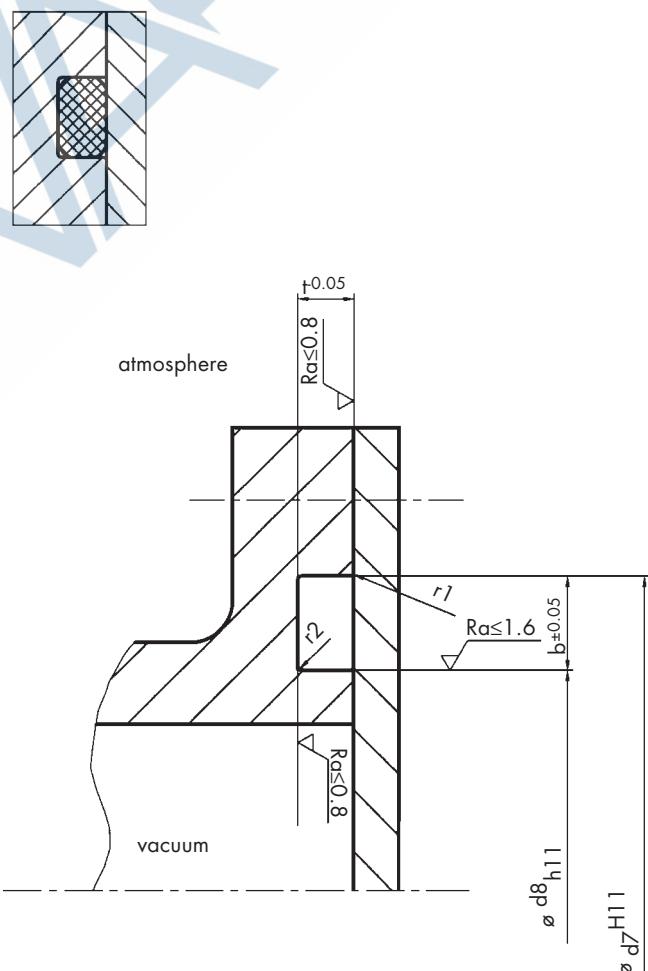

Groove dimensions

d2	Groove depth $t \pm 0.05$	Groove width $b \pm 0.05$	r1	r2
1.5	1.05	1.8	0.1	0.2
1.78	1.25	2.1	0.1	0.2
1.8	1.25	2.1	0.1	0.2
2	1.4	2.3	0.1	0.3
2.5	1.75	2.9	0.1	0.3
2.6	1.8	3	0.1	0.4
2.62	1.85	3.1	0.1	0.4
2.65	1.85	3.1	0.1	0.4
2.7	1.9	3.15	0.1	0.4
2.8	1.95	3.2	0.1	0.4
3	2.1	3.5	0.1	0.6
3.1	2.2	3.6	0.1	0.6
3.5	2.45	4.1	0.2	0.6
3.53	2.5	4.1	0.2	0.6
3.55	2.5	4.15	0.2	0.6
3.6	2.5	4.2	0.2	0.6
3.7	2.6	4.3	0.2	0.6
4	2.8	4.7	0.2	0.6
4.5	3.15	5.3	0.2	0.8
5	3.5	5.9	0.2	0.8
5.3	3.7	6.3	0.2	1
5.33	3.7	6.3	0.2	1
5.5	3.8	6.6	0.2	1
5.7	4	6.7	0.2	1
6	4.2	7.1	0.2	1
6.5	4.6	7.6	0.2	1
6.99	4.9	8.2	0.3	1
7	4.9	8.2	0.3	1
7.5	5.3	8.7	0.3	1
8	5.6	9.4	0.3	1
8.4	5.9	9.9	0.3	1
8.5	6	10	0.3	1
9	6.4	10.5	0.3	1
9.5	6.7	11.2	0.3	1
10	7.1	11.7	0.3	1

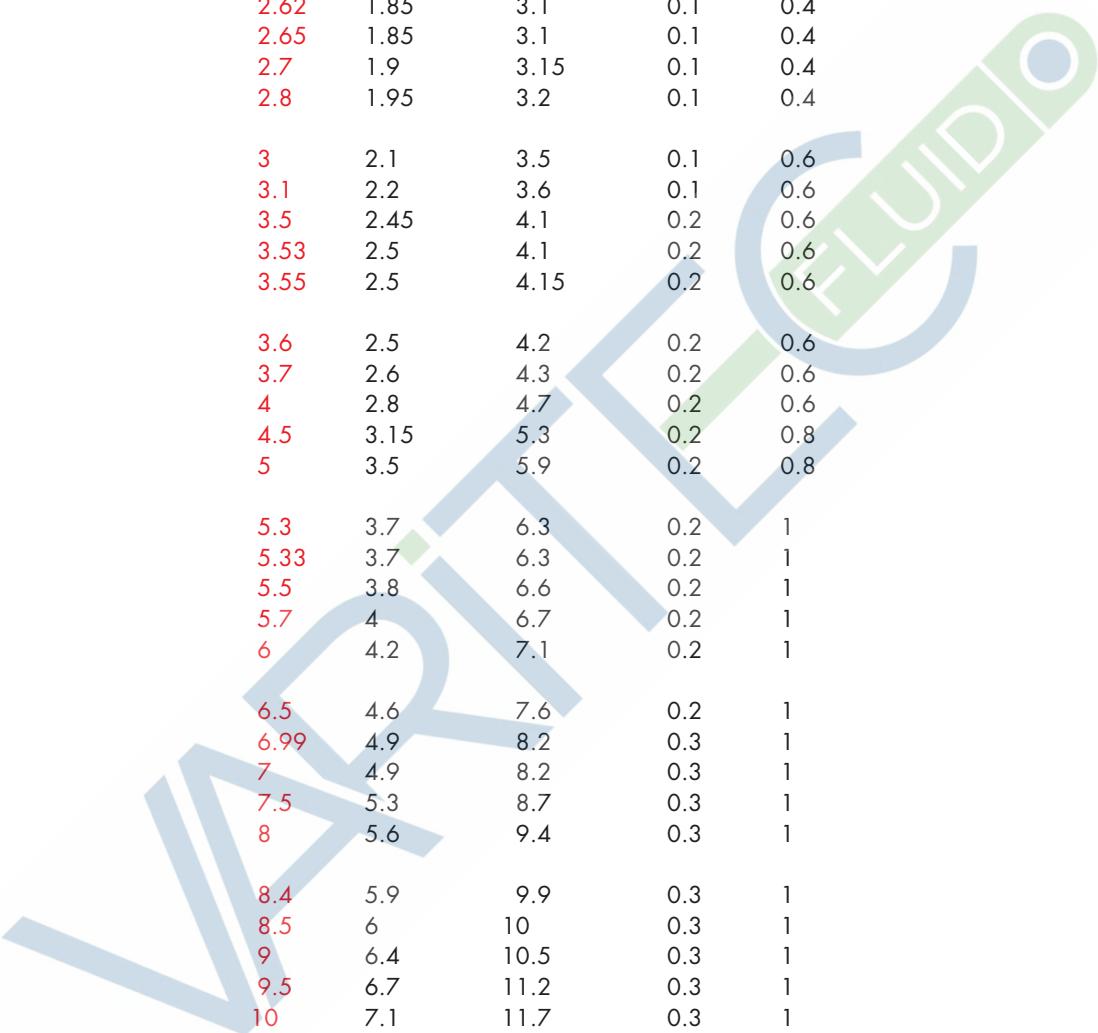

Dynamic sealing

O-rings are used successfully as sealing elements in dynamic applications. However, their use is limited to lower pressures and speeds, or to use in small installation housings.


Because of the friction resistance in movement, e.g. in hydraulic or pneumatic components, a smaller O-ring deformation is chosen than for static sealing. The item should always be well lubricated in order to prevent a loss of power due to friction and premature wear of the O-ring if it runs dry.

The installation housings are the same for the reciprocating movement, and for the movement with simultaneous rotating (helical) movement. There are differences between the housings of hydraulic and pneumatic applications, because of the differences in pressure and lubrication.

Hydraulics

O-rings should only be used to seal hydraulic pistons and rods if there is little space for the installation, or if the rod stroke is relatively short with a low frequency, and the seal does not have to be completely leak-proof. In fact, a tiny amount of leakage is desirable as it provides a lubricant film that reduces friction and wear.



**Dynamic sealing,
internal sealing,
rectangular groove by
radial deformation**

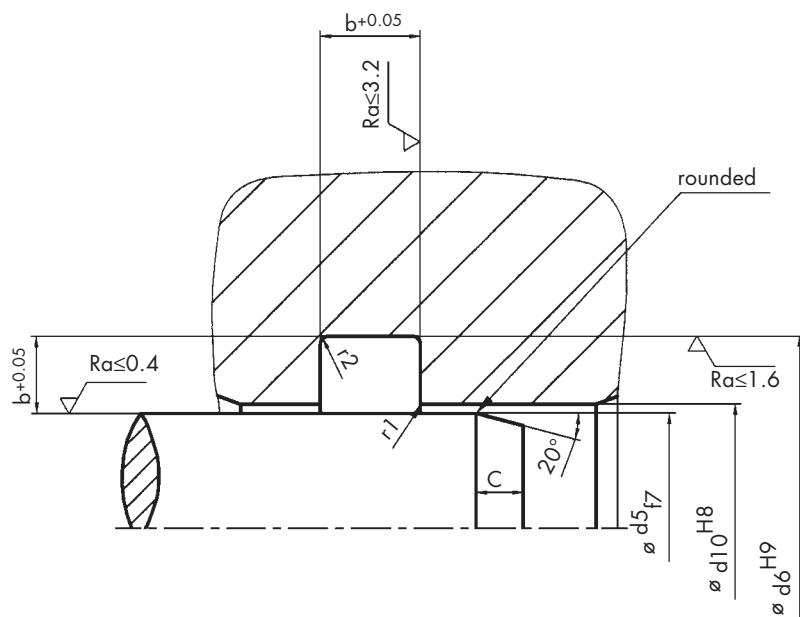

Groove dimensions


d2	Groove depth $t+0.05$	Groove width $b+0.25$	Lead-in chamfer C	d2	Groove depth $t+0.05$	Groove width $b+0.25$	Lead-in chamfer C
1	0.9	1.3	1	3.7	3.2	4.8	2
1.2	1	1.6	1	4	3.5	5.1	2
1.25	1.1	1.6	1	4.3	3.8	5.5	2.5
1.3	1.1	1.7	1.2	4.5	4	5.7	2.5
1.5	1.3	1.9	1.2	5	4.4	6.4	2.7
1.6	1.4	2	1.2	5.3	4.7	6.8	2.9
1.78	1.5	2.3	1.3	5.33	4.7	6.9	2.9
1.8	1.5	2.4	1.3	5.5	4.9	7.1	3
1.9	1.6	2.5	1.3	5.7	5.1	7.2	3
2	1.7	2.6	1.3	6	5.4	7.5	3.6
2.2	1.9	2.8	1.3	6.5	5.8	8.1	3.6
2.4	2.1	3	1.4	6.99	6.2	8.8	3.6
2.5	2.2	3.1	1.4	7	6.2	8.9	3.6
2.6	2.2	3.3	1.5	7.5	6.7	9.4	3.8
2.62	2.2	3.4	1.5	8	7.1	10.2	4
2.65	2.3	3.4	1.5	8.4	7.5	10.6	4.2
2.7	2.4	3.4	1.5	8.5	7.6	10.8	4.2
2.8	2.4	3.6	1.6	9	8.1	11.4	4.5
3	2.6	3.8	1.8	9.5	8.5	12	4.5
3.1	2.7	3.9	1.8	10	9	12.6	4.5
3.5	3.1	4.4	2	10.5	9.5	13.2	5
3.53	3.1	4.5	2	11	9.9	13.9	5
3.55	3.1	4.5	2	12	10.9	15.1	5
3.6	3.1	4.6	2	15	13.7	18.8	5

Dynamic sealing,
external sealing,
rectangular groove by
radial deformation

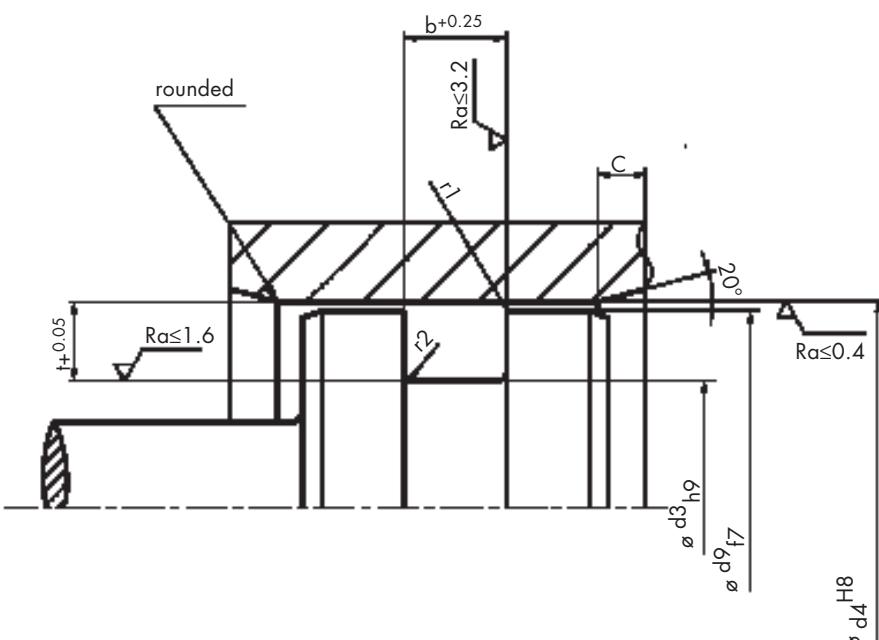


Pneumatics

In pneumatics, O-rings are used primarily to seal reciprocating movements. The deformation of the O-ring should be less than in hydraulic applications in order to keep the loss of power due to friction down, even with inadequate lubrication, in order to achieve the maximum possible lifetimes.

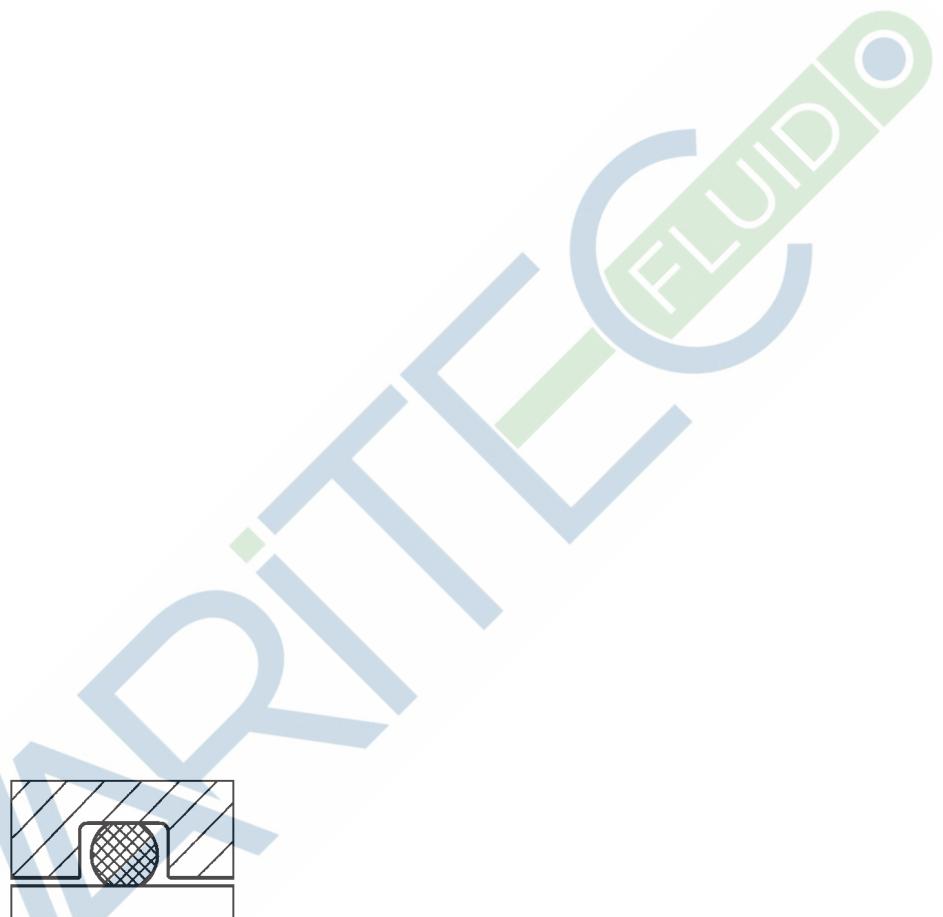


**Dynamic sealing,
internal sealing,
rectangular groove by
radial deformation**

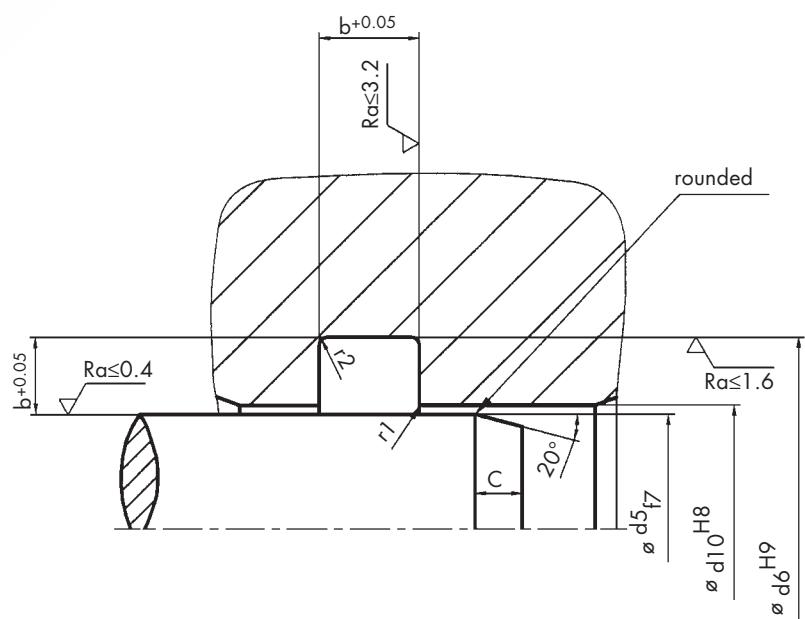

Groove dimensions

d2	Groove depth $t+0.05$	Groove width $b+0.25$	Lead-in chamfer C	d2	Groove depth $t+0.05$	Groove width $b+0.25$	Lead-in chamfer C
1	0.95	1.2	0.9	4	3.7	4.8	2
1.2	1.05	1.5	1	4.3	4	5.1	2
1.25	1.15	1.5	1	4.5	4.2	5.4	2.3
1.3	1.15	1.6	1.1	5	4.65	5.9	2.3
1.5	1.35	1.8	1.1	5.3	4.95	6.4	2.7
1.6	1.45	1.9	1.2	5.33	4.95	6.4	2.7
1.78	1.55	2.2	1.2	5.5	5.15	6.5	2.8
1.8	1.55	2.3	1.2	5.7	5.35	6.8	3
1.9	1.7	2.3	1.2	6	5.6	7.2	3.1
2	1.8	2.4	1.2	6.5	6.1	7.8	3.3
2.2	2	2.6	1.4	6.99	6.55	8.4	3.6
2.4	2.15	2.9	1.4	7	6.6	8.4	3.6
2.5	2.25	3	1.4	7.5	7.1	8.9	3.8
2.6	2.35	3.1	1.4	8	7.6	9.5	4
2.62	2.35	3.1	1.5	8.4	7.9	10.1	4.2
2.65	2.35	3.2	1.5	8.5	8	10.2	4.2
2.7	2.45	3.3	1.5	9	8.5	10.8	4.3
2.8	2.55	3.4	1.5	9.5	9	11.4	4.3
3	2.7	3.6	1.5	10	9.5	12	4.5
3.1	2.8	3.7	1.5				
3.5	3.15	4.2	1.8				
3.53	3.2	4.3	1.8				
3.55	3.2	4.3	1.8				
3.6	3.3	4.3	1.8				
3.7	3.4	4.4	1.8				

Dynamic sealing,
external sealing,
rectangular groove by
radial deformation

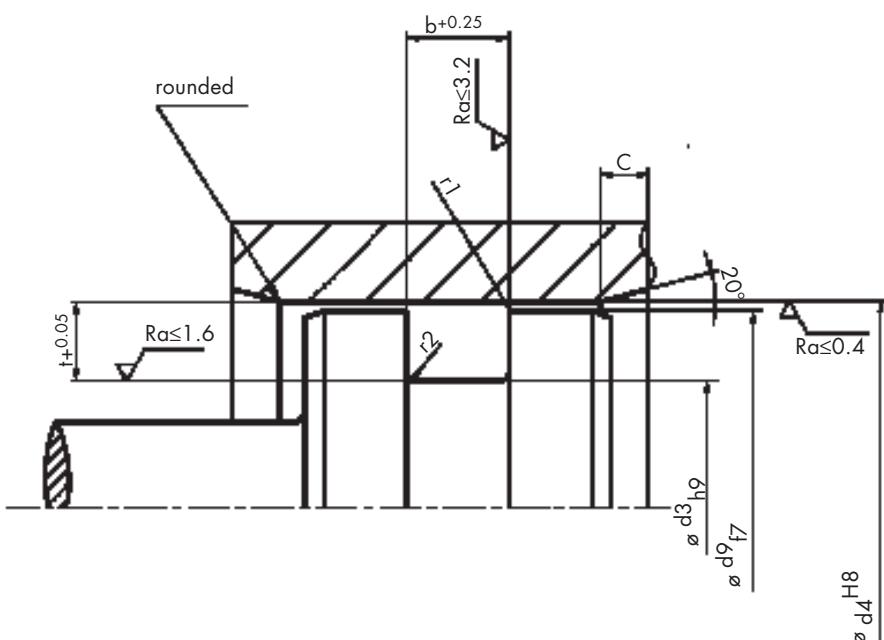


Design guidelines

Once the dimensions and geometric shape of the installation housing have been determined, the following details must be observed for a correct function.

- Any component edges and transition points that come into contact with the O-ring should be burr-free, rounded and polished if necessary.
- The transition point between the groove flank and groove base r_2 , and the transition between the groove flank and component surface r_1 , must be slightly rounded.

The radii relating to the cross section are given in the following table:

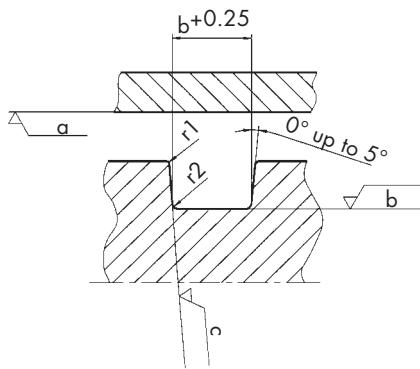

d2

r1

d2	r1	r2
1 – 2	0.1	0.3
2 – 3	0.2	0.3
3 – 4	0.2	0.5
4 – 5	0.2	0.6
5 – 6	0.2	0.6
6 – 8	0.2	0.8
8 – 10	0.2	1
10 – 12	0.2	1
12 – 15	0.2	1.2


- The surface quality is to be designed for the particular application. For dynamic applications, the surface must be finer than for a static one; the same also applies for pulsating pressures.

■ Avoid marks, holes and scratches on the surface.

■ Roughness values are classified to DIN 4768 with various parameters. In many cases, simply stating the average roughness value R_a is not sufficient for classifying the surface quality, and so the average roughness depth R_z , maximum roughness depth R_{max} and the contact area percentage t_p are also quoted. The contact area percentage should be more than 50% if at all possible.

Surface qualities


Type of sealing application	Surface	Pressure	R_a [μm]	R_z [μm]	R_{max} [μm]
dynamic radial	counter surface a		≤ 0.4	≤ 1.2	≤ 1.6
	groove base b		≤ 1.6	≤ 3.2	≤ 6.3
	groove flanks c		≤ 3.2	≤ 6.3	≤ 10
static radial / axial	sealing surface a	not pulsating	≤ 1.6	≤ 6.3	≤ 10
	groove base b		≤ 3.2	≤ 10	≤ 12.5
	groove flanks c		≤ 6.3	≤ 12.5	≤ 16
	sealed surface a	pulsating	≤ 0.8	≤ 1.6	≤ 3.2
	groove base b		≤ 1.6	≤ 3.2	≤ 6.3
	groove flanks c		≤ 3.2	≤ 6.3	≤ 10

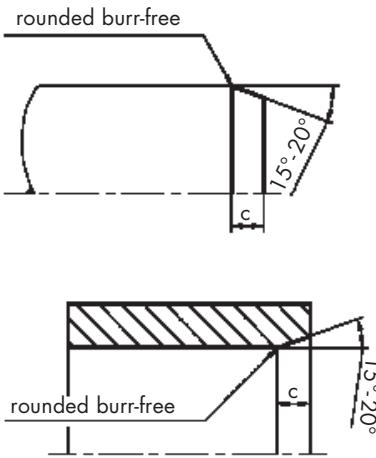

Lead-in chamfers

Lead-in chamfers should be used to prevent damage to the O-ring and ensure correct installation.

The angles between the lead-in chamfers and the level should be between 15° and 20°. Chamfer lengths C are given in the groove dimension tables.

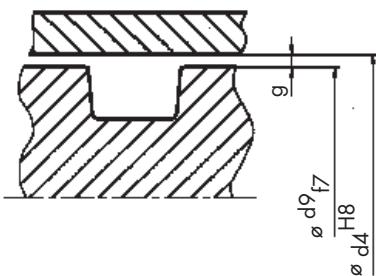

Maximum permitted values for radial sealing gap g [mm]

The permitted values for the sealing gap are determined by the pressure, material hardness and diameter.

Type of sealing application	Pressure [bar]	Material hardness [Shore A]		
		70	80	90
static	≤ 60	0.2	0.25	0.3
	> 60 – 100	0.1	0.2	0.25
	> 100 – 160	0.05	0.1	0.2
	> 160 – 250	–	0.05	0.1
	> 250 – 350	–	–	0.05
dynamic	≤ 30	0.2	0.25	0.3
	> 30 – 60	0.1	0.17	0.2
	> 60 – 80	–	0.1	0.15
	> 80 – 100	–	–	0.1

The gap dimensions given in the chart apply for all elastomer materials with the exception of silicone.

Sealing gap

The gap that is to be sealed should be as small as possible, so the fits and tolerances shown on installation tables and drawings should be observed.

However, do not forget that working loads, such as those exerted on a cylindrical tube under high pressure, will cause the gap to expand. If the gap is too big, there is a strong risk of gap extrusion. This means that the O-ring migrates into the gap as pressure is applied, where it will soon be destroyed.

In cases of dynamic sealing, the O-ring is destroyed by ripping and peeling. We recommend the use of back-up rings to protect the O-ring against gap extrusion.

Layout guidelines

In order to achieve the best possible sealing effect, the chosen O-rings should have the biggest possible cross section.

The hardness of the material destined for the O-ring depends on the pressures, gap widths (tolerances), type of sealing application (static, dynamic), and surface quality of the items being sealed. For standard applications we recommend a material hardness of 70 Shore A. For applications with, for example, pulsating pressures, and especially those under high pressure, we recommend materials of up to 90 Shore A.

Deformation

The sealing effect of the O-ring is provided by radial or axial deformation in the installation housing.

In a static application, the average deformation should be 15 – 30%, in relation to the cross section, in a dynamic (hydraulic) application 10 – 18%, and in a dynamic (pneumatic) application 4 – 12%

Stretching and compression

O-rings can be stretched or compressed to certain limits while being installed without this affecting the sealing function. The installed O-ring should not be stretched by more than 6% (in relation to the inside diameter) as this could lead to an unacceptably large reduction of the cross-sectional area, and also level off the inner sleeve. According to the rules of Guldinus, a 1% expansion of the inside diameter leads to a 0.5% reduction in cross section.

The compression of the O-ring should not exceed 3%, as otherwise the O-ring could distort in the groove.

Calculating the stretching and compression of the O-ring is easy with the following formula:

$$\text{Stretching} = \frac{(d_3-d_1)}{d_1} \times 100\%$$

$$\text{Compression} = \frac{(d_a-d_6)}{d_a} \times 100\%$$

$$d_a = (d_1 + 2 \times d_2)$$

d₁ = O-ring inside diameter

d₂ = O-ring cross section diameter

d₃ = groove base diameter / inside

d₆ = groove base diameter / outside

Groove filling

The rectangular cross section surface of the installation groove (except vacuum) should be about 25% bigger than the circular cross section of the O-ring. This means the O-ring has enough space for a possible increase in volume if it comes into contact with an aggressive medium. Also, the medium pressure may affect a large part of the O-ring surface in order to enhance the contact pressure required to achieve the sealing effect. The groove filling level should be 70% to 85%, and is easy to calculate with the following formula:





$$\text{Groove filling level} = \frac{A_{OR}}{A_{Nut}} \times 100\%$$

$$A_{OR} = d_2^2 \times \frac{\pi}{4}$$

$$A_{groove} = t \times b$$



General installation instructions

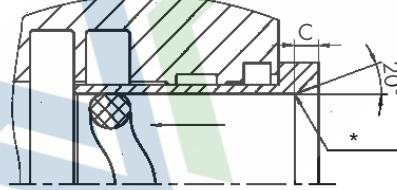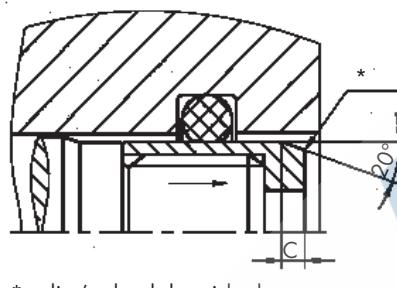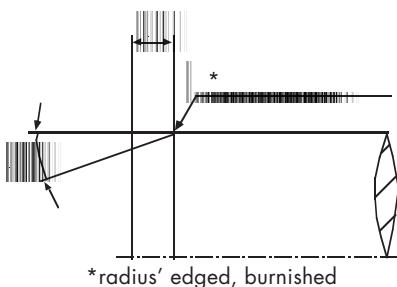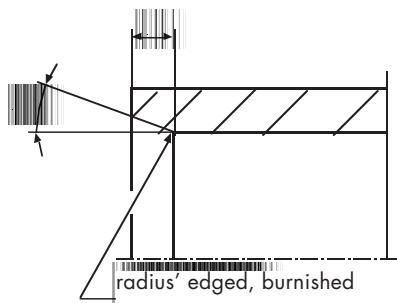

Avoid damaging the O-ring during installation as this will cause leakage. Observe the following:

- The O-ring must not be expanded to its elongation limit.
- Edges must be burr-free; radii and angles applied smoothly.
- Dust, dirt, metal chips and other particles are to be removed.



■ Tips of screws and installation housings for other sealing and guiding elements should be covered by an assembly sleeve.


■ A suitable grease is to be applied to the assembly surfaces and O-rings.

■ Elastomer materials are made smoother if they are heated in oil or hot water to approx. 80°C. This makes it easier to stretch the O-ring for assembly.

■ Any assembly tools used, such as expansion mandrels or sleeves, should be made of a soft material (e.g. POM) and not have any sharp edges.


■ The O-ring should not be rolled over assembly surfaces. Ensure the O-ring is not twisted as it slots into the groove.

Back-up rings



Back-up rings are used to prevent O-rings from gap extrusion. In the case of the combination of rising pressures and large sealing gaps there is the risk, that the O-ring material will be pressed into the sealing gap on the low pressure side. If this is repeated several times and the pressure continues rising, the O-ring can be damaged irreversible and finally get completely destroyed.

Back-up rings do not provide any sealing function. Through reduction of the sealing gap on the low pressure side they take care, that the O-ring can fulfill its sealing function without being damaged.



Materials

The selection of materials for back-up rings is primarily based upon the pressure and the appropriate extrusion resistance resp. hardness. Additionally parameters like height of the extrusion gap, media resistance and temperature range have to be taken into consideration. In practice there are various plastics and elastomers like for example PTFE, PA, POM, polyurethane, polyesterelastomer as well as NBR, FPM und EPDM available.

Installation housings

Back-up rings are normally installed in wider designed housings on the low pressure side. Because of the plurality of O-ring housings which are common in the market, the back-up ring dimensions normally have to be adapted to the existing housing geometry.

To layout back-up rings the following parameters are required:

- housing dimensions,
including tolerances
- type of application:
static / dynamic sealing
internal / external sealing
- O-ring dimensions
pressure, medium, temperature

If back-up rings from existing dimension ranges are used e.g. like NBR 90 the installation housing has to be designed according to the producers guidelines.

Please contact us for any further assistance.




**Standard-
dimensions:**

**International
standard**

**Dichtomatik
dimensions**

VARI FLUIDO

Standard dimensions
British Standard BS 1806 /
American Standard AS 568 A

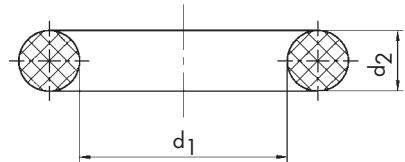


Ref.	d1	d2	Ref.	d1	d2	Ref.	d1	d2
1	0.74	1.02	111	10.78	2.62	167	177.47	2.62
2	1.07	1.27	112	12.37	2.62	168	183.83	2.62
3	1.42	1.52	113	13.95	2.62	169	190.18	2.62
4	1.78	1.78	114	15.54	2.62	170	196.53	2.62
5	2.57	1.78	115	17.13	2.62	171	202.87	2.62
6	2.9	1.78	116	18.72	2.62	172	209.23	2.62
7	3.68	1.78	117	20.29	2.62	173	215.58	2.62
8	4.48	1.78	118	21.89	2.62	174	221.932	32
9	5.28	1.78	119	23.47	2.62	175	228.28	2.62
10	6.07	1.78	120	25.07	2.62	176	234.63	2.62
11	7.66	1.78	121	26.64	2.62	177	240.98	2.62
12	9.25	1.78	122	28.25	2.62	178	247.33	2.62
13	10.82	1.78	123	29.82	2.62			
14	12.42	1.78	124	31.42	2.62			
15	14	1.78	125	33	2.62			
16	15.6	1.78	126	34.59	2.62	210	18.64	3.53
17	17.16	1.78	127	36.17	2.62	211	20.22	3.53
18	18.77	1.78	128	37.77	2.62	212	21.82	3.53
19	20.35	1.78	129	39.34	2.62	213	23.4	3.53
20	21.95	1.78	130	40.95	2.62	214	24.99	3.53
21	23.53	1.78	131	42.52	2.62	215	26.58	3.53
22	25.12	1.78	132	44.12	2.62	216	28.17	3.53
23	26.7	1.78	133	45.69	2.62	217	29.75	3.53
24	28.3	1.78	134	47.29	2.62	218	31.34	3.53
25	29.87	1.78	135	48.9	2.62	219	32.92	3.53
26	31.47	1.78	136	50.47	2.62	220	34.52	3.53
27	33.05	1.78	137	52.07	2.62	221	36.1	3.53
28	34.65	1.78	138	53.65	2.62	222	37.69	3.53
29	37.82	1.78	139	55.25	2.62	223	40.87	3.53
30	41	1.78	140	56.82	2.62	224	44.04	3.53
31	44.17	1.78	141	58.42	2.62	225	47.22	3.53
32	47.37	1.78	142	60	2.62	226	50.4	3.53
33	50.52	1.78	143	61.6	2.62	227	53.57	3.53
34	53.67	1.78	144	63.17	2.62	228	56.74	3.53
35	56.87	1.78	145	64.77	2.62	229	59.92	3.53
36	60.04	1.78	147	67.95	2.62	230	63.09	3.53
37	63.22	1.78	148	69.52	2.62	231	66.27	3.53
38	66.4	1.78	149	71.12	2.62	232	69.44	3.53
39	69.57	1.78	150	72.69	2.62	233	72.62	3.53
40	72.76	1.78	151	75.87	2.62	234	75.8	3.53
41	75.92	1.78	152	82.22	2.62	235	78.97	3.53
42	82.28	1.78	153	88.57	2.62	236	82.14	3.53
43	88.62	1.78	154	94.23	2.68	237	85.32	3.53
44	94.97	1.78	155	101.27	2.62	238	88.5	3.53
45	101.34	1.78	156	107.63	2.62	239	91.67	3.53
46	107.7	1.78	157	113.98	2.62	240	94.84	3.53
47	114	1.78	158	120.33	2.62	241	98.02	3.53
48	120.4	1.78	159	126.67	2.62	242	101.2	3.53
49	126.76	1.78	160	133	2.62	243	104.37	3.53
50	133.07	1.78	161	139.38	2.62	244	107.54	3.53
106	4.42	2.62	162	145.72	2.62	245	110.72	3.53
107	5.23	2.62	163	152.07	2.62	246	113.9	3.53
108	6.02	2.62	164	158.41	2.62	247	117.07	3.53
109	7.6	2.62	165	164.78	2.62	248	120.25	3.53
110	9.19	2.62	166	171.13	2.62	249	123.42	3.53

Ref.	d1	d2	Ref.	d1	d2	Ref.	d1	d2
250	126.6	3.53	345	100.97	5.33	429	126.37	6.99
251	129.77	3.53	346	104.14	5.33	430	129.54	6.99
252	132.94	3.53	347	107.32	5.33	431	132.72	6.99
253	136.12	3.53	348	110.49	5.33	432	135.9	6.99
254	139.3	3.53	349	113.67	5.33	433	139.07	6.99
255	142.47	3.53	350	116.84	5.33	434	142.24	6.99
256	145.65	3.53	351	120.02	5.33	435	145.42	6.99
257	148.82	3.53	352	123.2	5.33	436	148.6	6.99
258	151.99	3.53	353	126.37	5.33	437	151.77	6.99
259	158.35	3.53	354	129.54	5.33	438	158.12	6.99
260	164.7	3.53	355	132.72	5.33	439	164.47	6.99
261	171.05	3.53	356	135.9	5.33	440	170.82	6.99
261	177.4	3.53	357	139.07	5.33	441	177.17	6.99
263	183.75	3.53	358	142.24	5.33	442	183.52	6.99
264	190.1	3.53	359	145.42	5.33	443	189.87	6.99
265	196.44	3.53	360	148.6	5.33	444	196.22	6.99
266	202.79	3.53	361	151.77	5.33	445	202.57	6.99
267	209.14	3.53	362	158.12	5.33	445A*	208.92	6.99
268	215.49	3.53	363	164.47	5.33	446	215.27	6.99
269	221.84	3.53	364	170.82	5.33	446A*	221.62	6.99
270	228.19	3.53	365	177.17	5.33	447	227.97	6.99
271	234.54	3.53	366	183.52	5.33	447A*	234.32	6.99
272	240.89	3.53	367	189.87	5.33	448	240.67	6.99
273	247.24	3.53	368	196.22	5.33	448A*	247	6.99
274	253.59	3.53	369	202.57	5.33	449	253.57	6.99
275	266.3	3.53	370	208.92	5.33	449A*	259.7	6.99
276	279	3.53	371	215.27	5.33	450	266.07	6.99
277	291.7	3.53	372	221.62	5.33	450A*	272.40	6.99
278	304.39	3.53	373	227.97	5.33	451	278.77	6.99
279	329.8	3.53	374	234.32	5.33	451A*	285.1	6.99
280	355.2	3.53	375	240.67	5.33	452	291.47	6.99
281	380.6	3.53	376	247.02	5.33	452A*	297.8	6.99
282	405.26	3.53	377	253.37	5.33	453	304.17	6.99
283	430.66	3.53	378	266.07	5.33	454	316.87	6.99
284	456.06	3.53	379	278.77	5.33	455	329.57	6.99
325	37.47	5.33	380	291.47	5.33	456	342.27	6.99
326	40.65	5.33	381	304.17	5.33	457	354.97	6.99
327	43.82	5.33	382	329.57	5.33	458	367.67	6.99
328	47	5.33	383	354.97	5.33	459	380.37	6.99
329	50.16	5.33	384	380.37	5.33	460	393.07	6.99
330	53.34	5.33	385	405.26	5.33	461	405.26	6.99
331	56.52	5.33	386	430.66	5.33	462	417.96	6.99
332	59.7	5.33	387	456.06	5.33	463	430.66	6.99
333	62.87	5.33	388	481.46	5.33	464	443.36	6.99
334	66.04	5.33	389	506.81	5.33	465	456.06	6.99
335	69.22	5.33	390	532.2	5.33	466	468.76	6.99
336	72.4	5.33	391	557.6	5.33	467	481.46	6.99
337	75.57	5.33	392	582.68	5.33	468	494.16	6.99
338	78.74	5.33	393	608.08	5.33	469	506.86	6.99
339	81.92	5.33	394	633.48	5.33	470	532.26	6.99
340	85.09	5.33	395	658.88	5.33	471	557.66	6.99
341	88.27	5.33	396	113.67	6.99	472	582.68	6.99
342	91.44	5.33	397	116.84	6.99	473	608.08	6.99
343	94.62	5.33	398	120.02	6.99	474	633.48	6.99
344	97.8	5.33	399	123.2	6.99	475	658.88	6.99

* These dimensions are only listed in the BS 1806 standard.

Ref. d1 d2 Ref. d1 d2 Ref. d1 d2

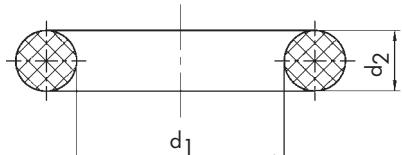

0031-16	3.1	1.6	0476-24	47.6	2.4	1445-30	144.5	3
0041-16	4.1	1.6	0496-24	49.6	2.4	1495-30	149.5	3
0051-16	5.1	1.6	0516-24	51.6	2.4	1545-30	154.5	3
0061-16	6.1	1.6	0546-24	54.6	2.4	1595-30	159.5	3
0071-16	7.1	1.6	0556-24	55.6	2.4	1645-30	164.5	3
0081-16	8.1	1.6	0576-24	57.6	2.4	1695-30	169.5	3
0091-16	9.1	1.6	0586-24	58.6	2.4	1745-30	174.5	3
0101-16	10.1	1.6	0596-24	59.6	2.4	1795-30	179.5	3
0111-16	11.1	1.6	0616-24	61.6	2.4	1845-30	184.5	3
0121-16	12.1	1.6	0626-24	62.6	2.4	1895-30	189.5	3
0131-16	13.1	1.6	0646-24	64.6	2.4	1945-30	194.5	3
0141-16	14.1	1.6	0676-24	67.6	2.4	1995-30	199.5	3
0151-16	15.1	1.6	0696-24	69.6	2.4	2095-30	209.5	3
0161-16	16.1	1.6				2195-30	219.5	3
0171-16	17.1	1.6				2295-30	229.5	3
0181-16	18.1	1.6	0195-30	19.5	3	2395-30	239.5	3
0191-16	19.1	1.6	0215-30	21.5	3	2445-30	244.5	3
0221-16	22.1	1.6	0225-30	22.5	3	2495-30	249.5	3
0251-16	25.1	1.6	0245-30	24.5	3			
0271-16	27.1	1.6	0255-30	25.5	3			
0291-16	29.1	1.6	0265-30	26.5	3	0443-57	44.3	5.7
0321-16	32.1	1.6	0275-30	27.5	3	0453-57	45.3	5.7
0351-16	35.1	1.6	0295-30	29.5	3	0493-57	49.3	5.7
0371-16	37.1	1.6	0315-30	31.5	3	0523-57	52.3	5.7
			0325-30	32.5	3	0543-57	54.3	5.7
0036-24	3.6	2.4	0345-30	34.5	3	0553-57	55.3	5.7
0046-24	4.6	2.4	0355-30	35.5	3	0593-57	59.3	5.7
0056-24	5.6	2.4	0365-30	36.5	3	0623-57	62.3	5.7
0066-24	6.6	2.4	0375-30	37.5	3	0643-57	64.3	5.7
0076-24	7.6	2.4	0395-30	39.5	3	0693-57	69.3	5.7
0086-24	8.6	2.4	0415-30	41.5	3	0743-57	74.3	5.7
0096-24	9.6	2.4	0425-30	42.5	3	0793-57	79.3	5.7
0106-24	10.6	2.4	0445-30	44.5	3	0843-57	84.3	5.7
0116-24	11.6	2.4	0495-30	49.5	3	0893-57	89.3	5.7
0126-24	12.6	2.4	0545-30	54.5	3	0943-57	94.3	5.7
0136-24	13.6	2.4	0555-30	55.5	3	0993-57	99.3	5.7
0146-24	14.6	2.4	0575-30	57.5	3	1043-57	104.3	5.7
0156-24	15.6	2.4	0595-30	59.5	3	1093-57	109.3	5.7
0166-24	16.6	2.4	0625-30	62.5	3	1143-57	114.3	5.7
0176-24	17.6	2.4	0645-30	64.5	3	1193-57	119.3	5.7
0186-24	18.6	2.4	0695-30	69.5	3	1243-57	124.3	5.7
0196-24	19.6	2.4	0745-30	74.5	3	1293-57	129.3	5.7
0206-24	20.6	2.4	0795-30	79.5	3	1343-57	134.3	5.7
0216-24	21.6	2.4	0845-30	84.5	3	1393-57	139.3	5.7
0246-24	24.6	2.4	0895-30	89.5	3	1443-57	144.3	5.7
0276-24	27.6	2.4	0945-30	94.5	3	1493-57	149.3	5.7
0296-24	29.6	2.4	0995-30	99.5	3	1543-57	154.3	5.7
0316-24	31.6	2.4	1045-30	104.5	3	1593-57	159.3	5.7
0346-24	34.6	2.4	1095-30	109.5	3	1643-57	164.3	5.7
0356-24	35.6	2.4	1145-30	114.5	3	1693-57	169.3	5.7
0376-24	37.6	2.4	1195-30	119.5	3	1743-57	174.3	5.7
0396-24	39.6	2.4	1245-30	124.5	3	1793-57	179.3	5.7
0416-24	41.6	2.4	1295-30	129.5	3	1843-57	184.3	5.7
0446-24	44.6	2.4	1345-30	134.5	3	1893-57	189.3	5.7
0456-24	45.6	2.4	1395-30	139.5	3	1943-57	194.3	5.7

1993-57 199.3 5.7
2093-57 209.3 5.7
2193-57 219.3 5.7
2293-57 229.3 5.7
2393-57 239.3 5.7

2493-57 249.3 5.7
2593-57 259.3 5.7
2693-57 269.3 5.7
2793-57 279.3 5.7
2893-57 289.3 5.7

2993-57 299.3 5.7
3093-57 309.3 5.7
3193-57 319.3 5.7
3393-57 339.3 5.7
3593-57 359.3 5.7

3793-57 379.3 5.7
3893-57 389.3 5.7
3993-57 399.3 5.7
4193-57 419.3 5.7
4393-57 439.3 5.7

4593-57 459.3 5.7
4793-57 479.3 5.7
4893-57 489.3 5.7
4993-57 499.3 5.7


1441-84 144.1 8.4
1491-84 149.1 8.4
1541-84 154.1 8.4
1591-84 159.1 8.4
1641-84 164.1 8.4

1691-84 169.1 8.4
1741-84 174.1 8.4
1791-84 179.1 8.4
1841-84 184.1 8.4
1891-84 189.1 8.4

1941-84 194.1 8.4
1991-84 199.1 8.4
2041-84 204.1 8.4
2091-84 209.1 8.4
2191-84 219.1 8.4


2291-84 229.1 8.4
2341-84 234.1 8.4
2391-84 239.1 8.4
2491-84 249.1 8.4



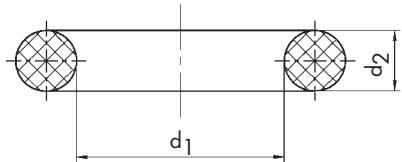

0	2.4	1.9	54	116.84	6.99
1	2.6	1.9	55	120.02	6.99
2	3.4	1.9	56	123.2	6.99
3	4.2	1.9	57	126.37	6.99
4	4.9	1.9	58	129.54	6.99
5	5.7	1.9	59	132.72	6.99
5a	6.4	1.9	60	135.9	6.99
6	7.2	1.9	61	139.07	6.99
6a	8	1.9	62	142.24	6.99
7	8.9	1.9	63	145.42	6.99
8	8.9	2.7	65	151.77	6.99
9	10.5	2.7	66	158.12	6.99
10	12.1	2.7	67	164.47	6.99
11	13.6	2.7	68	170.82	6.99
12	15.1	2.7	69	177.17	6.99
13	16.9	2.7	70	183.52	6.99
14	18.4	2.7	71	189.87	6.99
15	18.3	3.6	72	196.22	6.99
16	19.8	3.6	73	202.57	6.99
17	21.3	3.6	74	215.27	6.99
18	23	3.6	75	227.97	6.99
19	24.6	3.6	76	240.67	6.99
20	26.2	3.6	77	253.37	6.99
21	27.8	3.6	78	266.07	6.99
22	29.3	3.6	79	278.77	6.99
23	30.8	3.6	80	291.47	6.99
24	32.5	3.6	81	304.17	6.99
25	34.1	3.6	82	316.87	6.99
26	35.6	3.6	83	329.57	6.99
27	37.3	3.6	84	342.27	6.99
28	37.47	5.33	85	354.97	6.99
29	40.65	5.33	86	367.67	6.99
30	43.82	5.33	87	380.37	6.99
31	47	5.33	88	393.07	6.99
32	50.16	5.33			
33	53.34	5.33			
34	56.52	5.33			
36	62.87	5.33			
37	66.04	5.33			
38	69.22	5.33			
39	72.4	5.33			
40	75.57	5.33			
41	78.74	5.33			
42	81.92	5.33			
43	85.09	5.33			
44	88.27	5.33			
45	91.44	5.33			
46	94.62	5.33			
47	97.8	5.33			
48	100.97	5.33			
49	104.14	5.33			
50	107.32	5.33			
51	110.49	5.33			
52	113.67	5.33			
53	113.67	6.99			



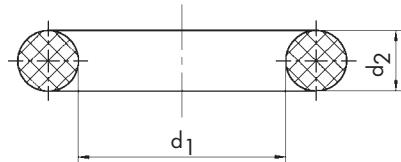

3.1	1.6	69.5	3	239.3	5.7
4.1	1.6	74.5	3	249.3	5.7
5.1	1.6	79.5	3	259.3	5.7
6.1	1.6	84.5	3	269.3	5.7
7.1	1.6	89.5	3	279.3	5.7

8.1	1.6	94.5	3	289.3	5.7
9.1	1.6	99.5	3	299.3	5.7
10.1	1.6	104.5	3	319.3	5.7
11.1	1.6	109.5	3	339.3	5.7
12.1	1.6	114.5	3	359.3	5.7

13.1	1.6	119.5	3	379.3	5.7
14.1	1.6	124.5	3	399.3	5.7
15.1	1.6	129.5	3	419.3	5.7
16.1	1.6	134.5	3	439.3	5.7
17.1	1.6	139.5	3	459.3	5.7

18.1	1.6	144.5	3	479.3	5.7
19.1	1.6			499.3	5.7
22.1	1.6				
25.1	1.6				
27.1	1.6				

29.1	1.6	44.2	5.7	144.1	8.4
32.1	1.6	49.2	5.7	149.1	8.4
35.1	1.6	54.2	5.7	154.1	8.4
37.1	1.6	59.2	5.7	159.1	8.4
		64.2	5.7	164.1	8.4

3.3	2.4	69.2	5.7	169.1	8.4
4.3	2.4	74.2	5.7	174.1	8.4
5.3	2.4	79.2	5.7	179.1	8.4
6.3	2.4	84.1	5.7	184.1	8.4
7.3	2.4	89.1	5.7	189.1	8.4


8.3	2.4	94.1	5.7	194.1	8.4
9.3	2.4	99.1	5.7	199.1	8.4
10.3	2.4	104.1	5.7	209.1	8.4
11.3	2.4	109.1	5.7	219.1	8.4
12.3	2.4	114.3	5.7	229.1	8.4

13.3	2.4	119.3	5.7	239.1	8.4
14.3	2.4	124.3	5.7	249.1	8.4
15.3	2.4	129.3	5.7		
16.3	2.4	134.3	5.7		
17.3	2.4	139.3	5.7		

19.2	3	144.3	5.7
22.2	3	149.3	5.7
24.2	3	154.3	5.7
26.2	3	159.3	5.7
29.2	3	164.3	5.7

32.2	3	169.3	5.7
34.2	3	174.3	5.7
36.2	3	179.3	5.7
39.2	3	184.3	5.7
42.3	3	189.3	5.7

44.2	3	194.3	5.7
49.2	3	199.3	5.7
54.2	3	209.3	5.7
59.2	3	219.3	5.7
64.5	3	229.3	5.7

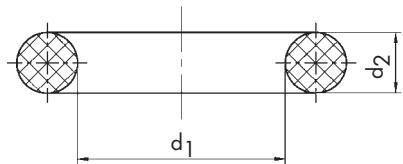


Ref.	d1	d2	Ref.	d1	d2	Ref.	d1	d2
P3	2.8	1.9	P22A	21.7	3.5	P48A	47.6	5.7
P4	3.8	1.9	P22.4	22.1	3.5	P50A	49.6	5.7
P5	4.8	1.9	P24	23.7	3.5	P52	51.6	5.7
P6	5.8	1.9	P25	24.7	3.5	P53	52.6	5.7
P7	6.8	1.9	P25.5	25.2	3.5	P55	54.6	5.7
P8	7.8	1.9	P26	25.7	3.5	P56	55.6	5.7
P9	8.8	1.9	P28	27.7	3.5	P58	57.6	5.7
P10	9.8	1.9	P29	28.7	3.5	P60	59.6	5.7
			P29.5	29.2	3.5	P62	61.6	5.7
			P30	29.7	3.5	P63	62.6	5.7
P10A	9.8	2.4	P31	30.7	3.5	P65	64.6	5.7
P11	10.8	2.4	P31.5	31.2	3.5	P67	66.6	5.7
P11.2	11	2.4	P32	31.7	3.5	P70	69.6	5.7
P12	11.8	2.4	P34	33.7	3.5	P71	70.6	5.7
P12.5	12.3	2.4	P35	34.7	3.5	P75	74.6	5.7
P14	13.8	2.4	P35.5	35.2	3.5	P80	79.6	5.7
P15	14.8	2.4	P36	35.7	3.5	P85	84.6	5.7
P16	15.8	2.4	P38	37.7	3.5	P90	89.6	5.7
P18	17.8	2.4	P39	38.7	3.5	P95	94.6	5.7
P20	19.8	2.4	P40	39.7	3.5	P100	99.6	5.7
P21	20.8	2.4	P41	40.7	3.5	P102	101.6	5.7
P22	21.8	2.4	P42	41.7	3.5	P105	104.6	5.7
			P44	43.7	3.5	P110	109.6	5.7
			P45	44.7	3.5	P112	111.6	5.7
			P46	45.7	3.5	P115	114.6	5.7
G25	24.4	3.1	P48	47.7	3.5	P120	119.6	5.7
G30	29.4	3.1	P49	48.7	3.5	P125	124.6	5.7
G35	34.4	3.1	P50	49.7	3.5	P130	129.6	5.7
G40	39.4	3.1				P132	131.6	5.7
G45	44.4	3.1				P135	134.6	5.7
G50	49.4	3.1				P140	139.6	5.7
G55	54.4	3.1				P145	144.6	5.7
G60	59.4	3.1				G150	149.3	5.7
G65	64.4	3.1				P150	149.6	5.7
G70	69.4	3.1				G155	154.3	5.7
G75	74.4	3.1				G160	159.3	5.7
G80	79.4	3.1				G165	164.3	5.7
G85	84.4	3.1				G170	169.3	5.7
G90	89.4	3.1				G175	174.3	5.7
G95	94.4	3.1				G180	179.3	5.7
G100	99.4	3.1				G185	184.3	5.7
G105	104.4	3.1				G190	189.3	5.7
G110	109.4	3.1				G195	194.3	5.7
G115	114.4	3.1				G200	199.3	5.7
G120	119.4	3.1				G210	209.3	5.7
G125	124.4	3.1				G220	219.3	5.7
G130	129.4	3.1				G230	229.3	5.7
G135	134.4	3.1				G240	239.3	5.7
G140	139.4	3.1				G250	249.3	5.7
G145	144.4	3.1				G260	259.3	5.7
						G270	269.3	5.7
						G280	279.3	5.7
						G290	289.3	5.7
						G300	299.3	5.7

P150A	149.5	8.4
P155	154.5	8.4
P160	159.5	8.4
P165	164.5	8.4
P170	169.5	8.4
P175	174.5	8.4
P180	179.5	8.4
P185	184.5	8.4
P190	189.5	8.4
P195	194.5	8.4
P200	199.5	8.4
P205	204.5	8.4
P209	208.5	8.4
P210	209.5	8.4
P215	214.5	8.4
P220	219.5	8.4
P225	224.5	8.4
P230	229.5	8.4
P235	234.5	8.4
P240	239.5	8.4
P245	244.5	8.4
P250	249.5	8.4
P255	254.5	8.4
P260	259.5	8.4
P265	264.5	8.4
P270	269.5	8.4
P275	274.5	8.4
P280	279.5	8.4
P285	284.5	8.4
P290	289.5	8.4
P295	294.5	8.4
P300	299.5	8.4
P315	314.5	8.4
P320	319.5	8.4
P335	334.5	8.4
P340	339.5	8.4
P355	354.5	8.4
P360	359.5	8.4
P375	374.5	8.4
P385	384.5	8.4
P400	399.5	8.4



Standard dimensions
DIN 3771

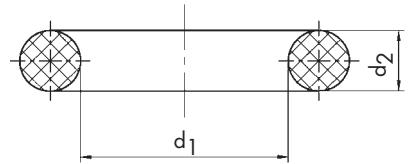

d1	d2	d1	d2	d1	d2	d1	d2
1.8	1.8	31.5	2.65	85	3.55	71	5.3
2	1.8	32.5	2.65	87.5	3.55	73	5.3
2.24	1.8	33.5	2.65	90	3.55	75	5.3
2.5	1.8	34.5	2.65	92.5	3.55	77.5	5.3
2.8	1.8	35.5	2.65	95	3.55	80	5.3
3.15	1.8	36.5	2.65	97.5	3.55	82.5	5.3
3.55	1.8	37.5	2.65	100	3.55	85	5.3
3.75	1.8	38.7	2.65	103	3.55	87.5	5.3
4	1.8			106	3.55	90	5.3
4.5	1.8			109	3.55	92.5	5.3
4.87	1.8	18	3.55	112	3.55	95	5.3
5	1.8	19	3.55	115	3.55	97.5	5.3
5.15	1.8	20	3.55	118	3.55	100	5.3
5.3	1.8	21.2	3.55	122	3.55	103	5.3
5.6	1.8	22.4	3.55	125	3.55	106	5.3
6	1.8	23.6	3.55	128	3.55	109	5.3
6.3	1.8	25	3.55	132	3.55	112	5.3
6.7	1.8	25.8	3.55	136	3.55	115	5.3
6.9	1.8	26.5	3.55	140	3.55	118	5.3
7.1	1.8	28	3.55	145	3.55	122	5.3
7.5	1.8	30	3.55	150	3.55	125	5.3
8	1.8	31.5	3.55	155	3.55	128	5.3
8.5	1.8	32.5	3.55	160	3.55	132	5.3
8.76	1.8	33.5	3.55	165	3.55	136	5.3
9	1.8	34.5	3.55	170	3.55	140	5.3
9.5	1.8	35.5	3.55	175	3.55	145	5.3
10	1.8	36.5	3.55	180	3.55	150	5.3
10.6	1.8	37.5	3.55	185	3.55	155	5.3
11.2	1.8	38.7	3.55	190	3.55	160	5.3
11.8	1.8	40	3.55	195	3.55	165	5.3
12.5	1.8	41.2	3.55	200	3.55	170	5.3
13.2	1.8	42.5	3.55			175	5.3
14	1.8	43.7	3.55			180	5.3
15	1.8	45	3.55			185	5.3
16	1.8	46.2	3.55			190	5.3
17	1.8	47.5	3.55	40	5.3	195	5.3
		48.7	3.55	41.2	5.3	200	5.3
		50	3.55	42.5	5.3	206	5.3
		51.5	3.55	43.7	5.3	212	5.3
		53	3.55	45	5.3	218	5.3
14	2.65	54.5	3.55	46.2	5.3	224	5.3
15	2.65	56	3.55	47.5	5.3	230	5.3
16	2.65	58	3.55	48.7	5.3	236	5.3
17	2.65	60	3.55	50	5.3	243	5.3
18	2.65	61.5	3.55	51.5	5.3	250	5.3
19	2.65	63	3.55	53	5.3	258	5.3
20	2.65	65	3.55	54.5	5.3	265	5.3
21.2	2.65	67	3.55	56	5.3	272	5.3
22.4	2.65	69	3.55	58	5.3	280	5.3
23.6	2.65	71	3.55	60	5.3	290	5.3
25	2.65	73	3.55	61.5	5.3	300	5.3
25.8	2.65	75	3.55	63	5.3	307	5.3
26.5	2.65	77.5	3.55	65	5.3	315	5.3
28	2.65	80	3.55	67	5.3	325	5.3
30	2.65	82.5	3.55	69	5.3	335	5.3

d1 d2

345 5.3
355 5.3
365 5.3
375 5.3
387 5.3

400 5.3

206 7
212 7
218 7
224 7
230 7

236 7
243 7
250 7
258 7
265 7

272 7
280 7
290 7
300 7
307 7


315 7
325 7
335 7
345 7
355 7
365 7
375 7
387 7
400 7
412 7

425 7
437 7
450 7
462 7
475 7


487 7
500 7
515 7
530 7
545 7

560 7
580 7
600 7
615 7
630 7

650 7
670 7

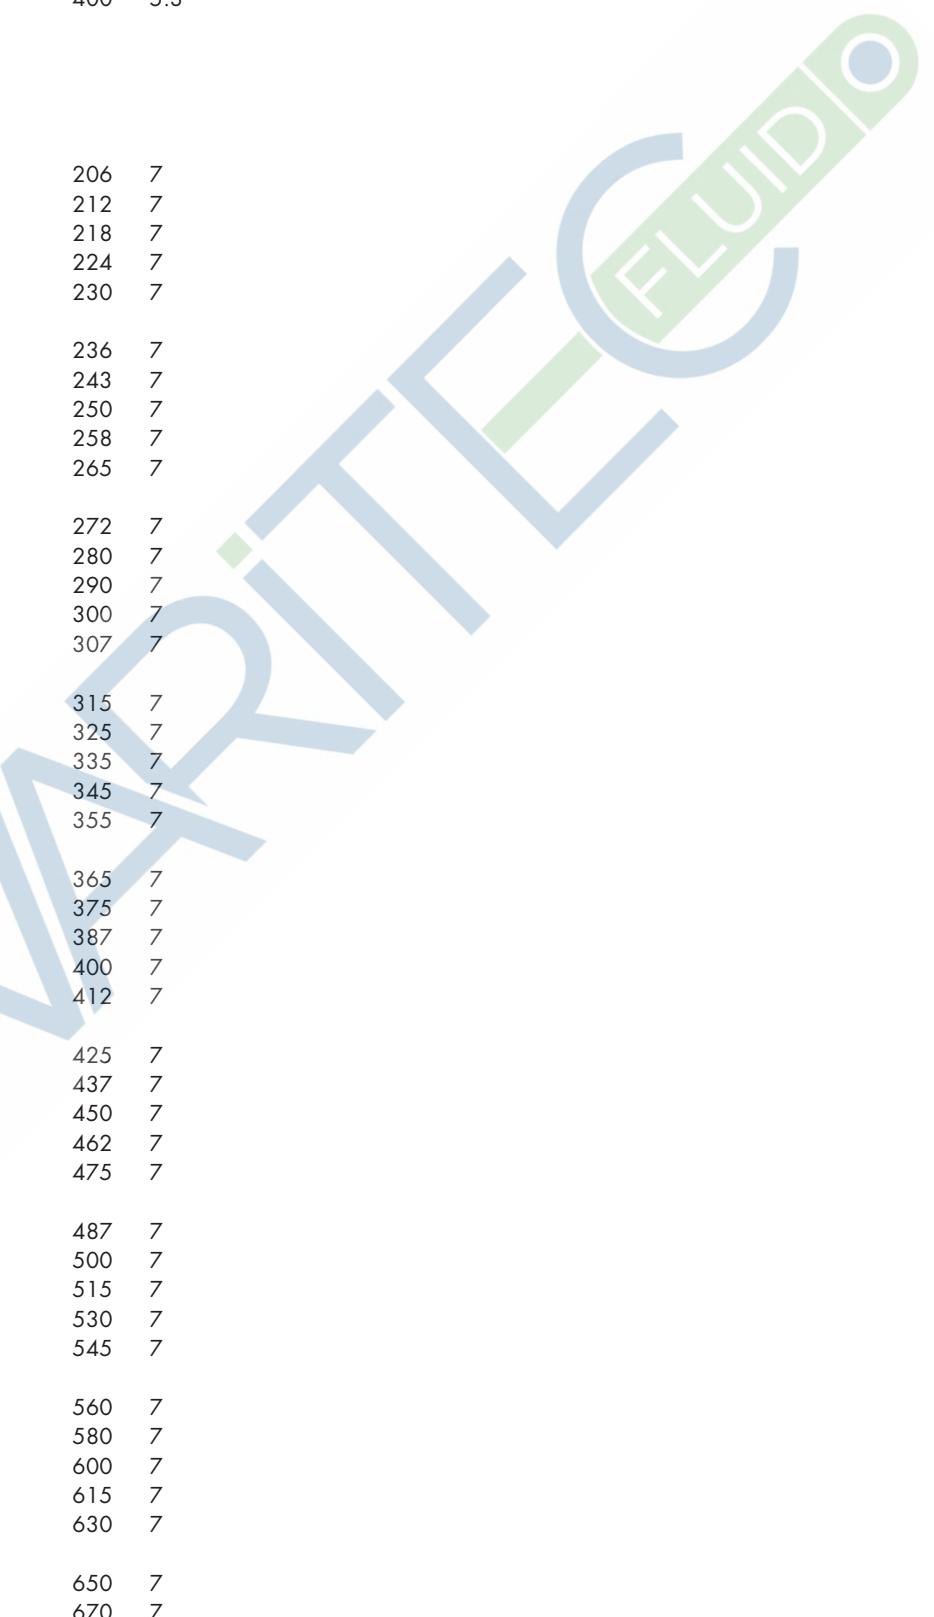

Standard dimensions
ISO 3601-1 Series G

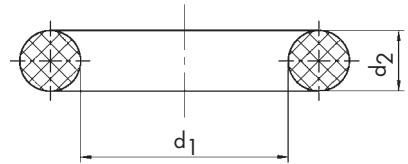

d1	d2	d1	d2	d1	d2	d1	d2
1.8	1.8	31.5	2.65	85	3.55	71	5.3
2	1.8	32.5	2.65	87.5	3.55	73	5.3
2.24	1.8	33.5	2.65	90	3.55	75	5.3
2.5	1.8	34.5	2.65	92.5	3.55	77.5	5.3
2.8	1.8	35.5	2.65	95	3.55	80	5.3
3.15	1.8	36.5	2.65	97.5	3.55	82.5	5.3
3.55	1.8	37.5	2.65	100	3.55	85	5.3
3.75	1.8	38.7	2.65	103	3.55	87.5	5.3
4	1.8			106	3.55	90	5.3
4.5	1.8			109	3.55	92.5	5.3
4.87	1.8	18	3.55	112	3.55	95	5.3
5	1.8	19	3.55	115	3.55	97.5	5.3
5.15	1.8	20	3.55	118	3.55	100	5.3
5.3	1.8	21.2	3.55	122	3.55	103	5.3
5.6	1.8	22.4	3.55	125	3.55	106	5.3
6	1.8	23.6	3.55	128	3.55	109	5.3
6.3	1.8	25	3.55	132	3.55	112	5.3
6.7	1.8	25.8	3.55	136	3.55	115	5.3
6.9	1.8	26.5	3.55	140	3.55	118	5.3
7.1	1.8	28	3.55	145	3.55	122	5.3
7.5	1.8	30	3.55	150	3.55	125	5.3
8	1.8	31.5	3.55	155	3.55	128	5.3
8.5	1.8	32.5	3.55	160	3.55	132	5.3
8.75	1.8	33.5	3.55	165	3.55	136	5.3
9	1.8	34.5	3.55	170	3.55	140	5.3
9.5	1.8	35.5	3.55	175	3.55	145	5.3
10	1.8	36.5	3.55	180	3.55	150	5.3
10.6	1.8	37.5	3.55	185	3.55	155	5.3
11.2	1.8	38.7	3.55	190	3.55	160	5.3
11.8	1.8	40	3.55	195	3.55	165	5.3
12.5	1.8	41.2	3.55	200	3.55	170	5.3
13.2	1.8	42.5	3.55			175	5.3
14	1.8	43.7	3.55			180	5.3
15	1.8	45	3.55			185	5.3
16	1.8	46.2	3.55			190	5.3
17	1.8	47.5	3.55	40	5.3	195	5.3
		48.7	3.55	41.2	5.3	200	5.3
		50	3.55	42.5	5.3	206	5.3
		51.5	3.55	43.7	5.3	212	5.3
		53	3.55	45	5.3	218	5.3
14	2.65	54.5	3.55	46.2	5.3	224	5.3
15	2.65	56	3.55	47.5	5.3	230	5.3
16	2.65	58	3.55	48.7	5.3	236	5.3
17	2.65	60	3.55	50	5.3	243	5.3
18	2.65	61.5	3.55	51.5	5.3	250	5.3
19	2.65	63	3.55	53	5.3	258	5.3
20	2.65	65	3.55	54.5	5.3	265	5.3
21.2	2.65	67	3.55	56	5.3	272	5.3
22.4	2.65	69	3.55	58	5.3	280	5.3
23.6	2.65	71	3.55	60	5.3	290	5.3
25	2.65	73	3.55	61.5	5.3	300	5.3
25.8	2.65	75	3.55	63	5.3	307	5.3
26.5	2.65	77.5	3.55	65	5.3	315	5.3
28	2.65	80	3.55	67	5.3	325	5.3
30	2.65	82.5	3.55	69	5.3	335	5.3

d1 d2 d1 d2

345	5.3	400	7
355	5.3	412	7
365	5.3	425	7
375	5.3	437	7
387	5.3	450	7

400	5.3	462	7
		475	7
		487	7
		500	7
		515	7

109	7	530	7
112	7	545	7
115	7	560	7
118	7	580	7
122	7	600	7

125	7	615	7
128	7	630	7
132	7	650	7
136	7	670	7
140	7		

145	7		
150	7		
155	7		
160	7		
165	7		

170	7		
175	7		
180	7		
185	7		
190	7		

195	7		
200	7		
206	7		
212	7		
218	7		

224	7		
230	7		
236	7		
243	7		
250	7		


258	7		
265	7		
272	7		
280	7		
290	7		

300	7		
307	7		
315	7		
325	7		
335	7		

345	7		
355	7		
365	7		
375	7		
387	7		



Standard dimensions
ISO 3601-1 Series A

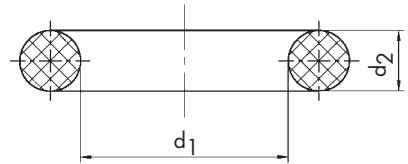

d1	d2	d1	d2	d1	d2	d1	d2
1.8	1.8	40	1.8	33.5	2.65	14	3.55
2	1.8	41.2	1.8	34.5	2.65	15	3.55
2.24	1.8	42.5	1.8	35.5	2.65	16	3.55
2.5	1.8	43.7	1.8	36.5	2.65	17	3.55
2.8	1.8	45	1.8	37.5	2.65	18	3.55
3.15	1.8	47.5	1.8	38.7	2.65	19	3.55
3.55	1.8	50	1.8	40	2.65	20	3.55
3.75	1.8	53	1.8	41.2	2.65	21.2	3.55
4	1.8	56	1.8	42.5	2.65	22.4	3.55
4.5	1.8	60	1.8	43.7	2.65	23.6	3.55
4.87	1.8	63	1.8	45	2.65	25	3.55
5	1.8	67	1.8	46.2	2.65	25.8	3.55
5.15	1.8	71	1.8	47.5	2.65	26.5	3.55
5.3	1.8	75	1.8	48.7	2.65	28	3.55
5.6	1.8	80	1.8	50	2.65	30	3.55
6	1.8	85	1.8	51.5	2.65	31.5	3.55
6.3	1.8	90	1.8	53	2.65	32.5	3.55
6.7	1.8	95	1.8	54.5	2.65	33.5	3.55
6.9	1.8	100	1.8	56	2.65	34.5	3.55
7.1	1.8	106	1.8	58	2.65	35.5	3.55
7.5	1.8	112	1.8	60	2.65	36.5	3.55
8	1.8	118	1.8	61.5	2.65	37.5	3.55
8.5	1.8	125	1.8	63	2.65	38.7	3.55
8.75	1.8			65	2.65	40	3.55
9	1.8			67	2.65	41.2	3.55
9.5	1.8	4.5	2.65	69	2.65	42.5	3.55
10	1.8	5.3	2.65	71	2.65	43.7	3.55
10.6	1.8	6	2.65	73	2.65	45	3.55
11.2	1.8	6.9	2.65	75	2.65	46.2	3.55
11.8	1.8	8	2.65	80	2.65	47.5	3.55
12.5	1.8	9	2.65	85	2.65	48.7	3.55
13.2	1.8	9.5	2.65	90	2.65	50	3.55
14	1.8	10	2.65	95	2.65	51.5	3.55
15	1.8	10.6	2.65	100	2.65	53	3.55
16	1.8	11.2	2.65	106	2.65	54.5	3.55
17	1.8	11.8	2.65	112	2.65	56	3.55
18	1.8	12.5	2.65	118	2.65	58	3.55
19	1.8	13.2	2.65	125	2.65	60	3.55
20	1.8	14	2.65	132	2.65	61.5	3.55
21.2	1.8	15	2.65	140	2.65	63	3.55
22.4	1.8	16	2.65	150	2.65	65	3.55
23.6	1.8	17	2.65	160	2.65	67	3.55
25	1.8	18	2.65	170	2.65	69	3.55
25.8	1.8	19	2.65	180	2.65	71	3.55
26.5	1.8	20	2.65	190	2.65	73	3.55
28	1.8	21.2	2.65	200	2.65	75	3.55
30	1.8	22.4	2.65	212	2.65	77.5	3.55
31.5	1.8	23.6	2.65	224	2.65	80	3.55
32.5	1.8	25	2.65	230	2.65	82.5	3.55
33.5	1.8	25.8	2.65	236	2.65	85	3.55
34.5	1.8	26.5	2.65	243	2.65	87.5	3.55
35.5	1.8	28	2.65	250	2.65	90	3.55
36.5	1.8	30	2.65			92.5	3.55
37.5	1.8	31.5	2.65			95	3.55
38.7	1.8	32.5	2.65			97.5	3.55

d1	d2	d1	d2	d1	d2
----	----	----	----	----	----

100	3.55	58	5.3	145	7
103	3.55	60	5.3	150	7
106	3.55	61.5	5.3	155	7
109	3.55	63	5.3	160	7
112	3.55	65	5.3	165	7

115	3.55	67	5.3	170	7
118	3.55	69	5.3	175	7
122	3.55	71	5.3	180	7
125	3.55	73	5.3	185	7
128	3.55	75	5.3	190	7

132	3.55	77.5	5.3	195	7
136	3.55	80	5.3	200	7
140	3.55	82.5	5.3	206	7
145	3.55	85	5.3	212	7
150	3.55	87.5	5.3	218	7

155	3.55	90	5.3	224	7
160	3.55	92.5	5.3	230	7
165	3.55	95	5.3	236	7
170	3.55	97.5	5.3	243	7
175	3.55	100	5.3	250	7

180	3.55	103	5.3	258	7
185	3.55	106	5.3	265	7
190	3.55	109	5.3	272	7
195	3.55	112	5.3	280	7
200	3.55	115	5.3	290	7

212	3.55	118	5.3	300	7
218	3.55	122	5.3	307	7
224	3.55	125	5.3	315	7
230	3.55	128	5.3	325	7
236	3.55	132	5.3	335	7

250	3.55	136	5.3	345	7
258	3.55	140	5.3	355	7
265	3.55	145	5.3	365	7
280	3.55	150	5.3	375	7
290	3.55	155	5.3	387	7

300	3.55	160	5.3	400	7
307	3.55	165	5.3		
315	3.55	170	5.3		
335	3.55	175	5.3		
355	3.55	180	5.3		

37.5	5.3	185	5.3		
38.7	5.3	190	5.3		
40	5.3	195	5.3		
41.2	5.3	200	5.3		
42.5	5.3				


43.7	5.3	109	7		
45	5.3	112	7		
46.2	5.3	115	7		
47.5	5.3	118	7		
48.7	5.3	122	7		

50	5.3	125	7		
51.5	5.3	128	7		
53	5.3	132	7		
54.5	5.3	136	7		
56	5.3	140	7		



Dichtomatik dimensions

d1 d2 d1 d2 d1 d2 d1 d2

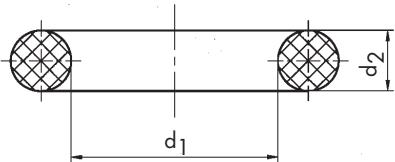

0.7	1.5	1.6	1.78	2.3	2.4	2.8	1.9
0.73	1.02	1.65	1.6	2.31	1.5	2.8	3.1
0.75	1	1.7	1.5	2.35	1	2.82	1.52
0.75	1.02	1.7	2.4	2.37	2.62	2.84	1.78
0.78	1.02	1.75	0.8	2.4	1.05	2.84	2.62
0.8	0.5	1.77	1.01	2.4	1.9	2.85	2.32
0.8	1.25	1.78	0.91	2.4	2.8	2.87	1.09
0.8	2	1.78	1.02	2.49	0.66	2.9	0.5
0.9	1.52	1.78	1.19	2.5	0.65	2.9	0.85
0.9	1.6	1.78	1.78	2.5	1	2.9	1
1	1	1.8	0.8	2.5	1.2	2.9	1.05
1	1.5	1.8	1	2.5	1.3	2.9	1.75
1	2	1.8	1.02	2.5	1.5	2.9	1.78
1.02	1.78	1.8	1.2	2.5	1.6	2.9	2.62
1.06	1.25	1.8	1.4	2.5	1.75	2.95	0.79
1.07	1.21	1.8	1.5	2.5	1.78	2.95	0.97
1.07	1.25	1.8	1.8	2.5	1.8	3	0.9
1.07	1.27	1.85	1.5	2.5	2	3	1
1.1	2	1.9	1.35	2.5	2.25	3	1.1
1.15	1	1.9	1.78	2.5	3	3	1.2
1.2	1	1.9	2.6	2.54	1.02	3	1.25
1.2	1.1	2	0.5	2.57	1.78	3	1.5
1.2	1.25	2	0.65	2.59	0.99	3	1.6
1.2	2	2	0.7	2.6	1	3	1.75
1.22	1.07	2	1	2.6	1.2	3	1.8
1.24	2.62	2	1.1	2.6	1.25	3	1.85
1.25	1	2	1.25	2.6	1.3	3	2
1.25	1.5	2	1.3	2.6	1.4	3	2.4
1.27	1.02	2	1.5	2.6	1.7	3	2.7
1.3	1	2	1.6	2.6	1.8	3	3
1.3	1.1	2	1.7	2.6	1.9	3	3.5
1.35	1.63	2	1.75	2.6	2	3	3.9
1.4	1.25	2	1.8	2.6	2.25	3	4
1.4	1.27	2	2	2.66	1.97	3	4.5
1.4	1.65	2	2.25	2.68	1.78	3.05	1.27
1.42	1.52	2	2.5	2.69	0.63	3.1	1.25
1.42	1.78	2	3	2.69	1.37	3.1	1.6
1.44	1.01	2.01	1.6	2.7	1	3.15	1.25
1.5	0.85	2.06	2.62	2.7	1.2	3.15	1.8
1.5	1	2.13	1.7	2.7	1.5	3.17	1.78
1.5	1.02	2.13	3.2	2.7	1.6	3.2	1
1.5	1.07	2.15	1.4	2.7	1.8	3.2	1.05
1.5	1.2	2.2	0.5	2.7	1.9	3.2	1.1
1.5	1.25	2.2	1	2.73	1.7	3.2	1.2
1.5	1.3	2.2	1.3	2.75	1.25	3.2	1.5
1.5	1.5	2.2	1.6	2.75	1.6	3.2	1.6
1.5	1.75	2.2	1.8	2.79	1.02	3.2	1.78
1.5	2	2.2	2.2	2.79	1.24	3.2	1.8
1.6	1	2.24	1.78	2.8	0.8	3.2	2.5
1.6	1.1	2.24	1.8	2.8	1	3.2	3
1.6	1.2	2.3	0.65	2.8	1.1	3.25	0.63
1.6	1.3	2.3	0.8	2.8	1.3	3.3	0.6
1.6	1.35	2.3	1.2	2.8	1.5	3.3	1
1.6	1.4	2.3	1.3	2.8	1.6	3.3	1.3
1.6	1.6	2.3	1.5	2.8	1.8	3.3	1.5

d1	d2										
3.3	1.7	3.8	1.5	4.5	0.8	4.9	1.95	5.5	1.5	6	1.8
3.3	2.4	3.8	1.7	4.5	1	4.9	2.62	5.5	1.6	6	1.9
3.3	2.5	3.8	1.75	4.5	1.2	4.93	1.5	5.5	1.8	6	2
3.34	0.5	3.8	1.9	4.5	1.32	4.95	1.28	5.5	2	6	2.1
3.35	1.78	3.8	2.4	4.5	1.5	5	0.8	5.5	2.3	6	2.2
3.4	0.5	3.8	2.8	4.5	1.7	5	1	5.5	2.4	6	2.3
3.4	0.9	3.81	0.61	4.5	1.75	5	1.2	5.5	2.5	6	2.4
3.4	1	3.89	1.55	4.5	1.8	5	1.25	5.5	3	6	2.5
3.4	1.3	3.9	1.8	4.5	1.9	5	1.35	5.5	3.5	6	2.6
3.4	1.7	3.95	1.78	4.5	2	5	1.4	5.51	1.24	6	2.65
3.4	1.8	3.96	1.6	4.5	2.25	5	1.5	5.56	1.59	6	2.7
3.4	1.9	4	1	4.5	2.4	5	1.6	5.59	3.05	6	2.75
3.4	2.8	4	1.2	4.5	2.5	5	1.75	5.6	1	6	2.8
3.45	2.02	4	1.3	4.5	2.65	5	1.8	5.6	1.2	6	3
3.5	0.9	4	1.5	4.5	3	5	1.9	5.6	1.7	6	3.2
3.5	1	4	1.6	4.5	3.5	5	2	5.6	1.8	6	3.5
3.5	1.1	4	1.75	4.5	5	5	2.2	5.6	2	6	3.75
3.5	1.2	4	1.8	4.57	1.02	5	2.3	5.6	2.3	6	4
3.5	1.3	4	1.9	4.6	1.2	5	2.5	5.6	2.4	6	4.5
3.5	1.5	4	2	4.6	1.8	5	2.65	5.6	2.5	6	5
3.5	1.6	4	2.2	4.6	1.85	5	3	5.64	2.62	6	5.2
3.5	1.8	4	2.5	4.6	2	5	3.5	5.67	1.78	6	5.5
3.5	2	4	2.6	4.6	2.3	5	4	5.69	2.18	6	6
3.5	2.5	4	2.62	4.6	2.4	5	5	5.7	1	6	6.5
3.5	2.6	4	3	4.6	2.5	5	5.5	5.7	1.2	6	7
3.5	3	4	3.5	4.6	3.2	5	6	5.7	1.4	6.02	2.62
3.5	3.9	4	4	4.7	0.79	5	8	5.7	1.78	6.03	1.88
3.53	1.02	4	4.5	4.7	0.9	5.1	1	5.7	1.9	6.07	0.76
3.55	1.6	4	5	4.7	1	5.1	1.1	5.7	2.15	6.07	1.02
3.55	1.8	4	5.5	4.7	1.2	5.1	1.6	5.74	1.02	6.07	1.3
3.56	1.27	4.1	1.6	4.7	1.42	5.1	1.8	5.75	1	6.07	1.63
3.6	1.3	4.2	0.5	4.7	1.5	5.15	1.8	5.75	2.15	6.07	1.78
3.6	2	4.2	1.4	4.7	1.6	5.2	0.6	5.79	1.02	6.07	1.88
3.6	2.4	4.2	1.5	4.7	1.78	5.2	1.7	5.8	1.5	6.1	1.6
3.6	2.7	4.2	1.6	4.7	1.9	5.23	2.62	5.8	1.6	6.1	1.8
3.62	1.64	4.2	1.8	4.7	2.7	5.28	1.78	5.8	1.78	6.14	1.78
3.63	2.62	4.2	1.9	4.7	3	5.3	1.27	5.8	1.9	6.15	1
3.65	1.78	4.25	2	4.75	1	5.3	1.5	5.8	2.6	6.17	1.72
3.66	1.19	4.25	2.25	4.75	1.24	5.3	1.7	5.82	1.2	6.2	1
3.66	1.9	4.3	1	4.75	1.27	5.3	1.75	5.88	2.62	6.2	1.74
3.68	1.25	4.3	1.3	4.75	1.5	5.3	1.8	5.9	0.9	6.2	1.8
3.68	1.78	4.3	1.4	4.75	2.62	5.3	2	5.9	1.8	6.2	1.83
3.7	1	4.3	1.5	4.76	1.78	5.3	2.2	5.9	2.05	6.2	1.9
3.7	1.2	4.3	1.8	4.8	0.81	5.3	2.4	5.9	2.55	6.2	2
3.7	1.6	4.3	2.4	4.8	1.3	5.3	2.5	5.94	3.53	6.2	3
3.7	1.8	4.34	3.53	4.8	1.35	5.3	2.65	6	0.75	6.2	4.1
3.7	1.9	4.4	1.1	4.8	1.5	5.3	4.3	6	1	6.3	0.6
3.7	2.8	4.4	1.6	4.8	1.8	5.3	5	6	1.1	6.3	1.5
3.72	1.02	4.4	1.8	4.8	1.9	5.37	1.7	6	1.2	6.3	1.6
3.75	1.8	4.42	2.62	4.87	1.78	5.37	1.78	6	1.3	6.3	1.8
3.8	1	4.47	1.02	4.87	1.8	5.41	1.02	6	1.4	6.3	2
3.8	1.1	4.47	1.27	4.87	3.53	5.49	1.35	6	1.5	6.3	2.39
3.8	1.25	4.47	1.87	4.9	1.3	5.5	1	6	1.6	6.3	2.4
3.8	1.27	4.48	1.78	4.9	1.5	5.5	1.25	6	1.7	6.3	2.6
3.8	1.35	4.5	0.75	4.9	1.9	5.5	1.3	6	1.75	6.3	4.8

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
6.35	0.81	6.97	3.57	7.5	1.5	7.9	1.6
6.35	0.89	7	0.6	7.5	1.6	7.9	1.8
6.35	1	7	1	7.5	1.7	7.9	2.1
6.35	1.6	7	1.2	7.5	1.78	7.9	2.3
6.35	1.78	7	1.3	7.5	1.8	7.9	2.5
6.35	2.03	7	1.35	7.5	1.85	7.9	4.7
6.35	3.28	7	1.4	7.5	1.9	7.92	2.62
6.36	1.58	7	1.5	7.5	2	7.94	1.78
6.4	1.3	7	1.58	7.5	2.2	7.94	4.76
6.4	1.8	7	1.6	7.5	2.3	8	0.6
6.4	1.9	7	1.7	7.5	2.4	8	1
6.4	2.5	7	1.8	7.5	2.5	8	1.1
6.5	1	7	2	7.5	2.8	8	1.2
6.5	1.1	7	2.2	7.5	3	8	1.25
6.5	1.25	7	2.3	7.5	3.5	8	1.5
6.5	1.5	7	2.5	7.5	5	8	1.6
6.5	1.55	7	2.7	7.52	3.53	8	1.64
6.5	1.6	7	3	7.59	2.62	8	1.7
6.5	1.9	7	3.5	7.6	1.2	8	1.75
6.5	2	7	4	7.6	1.3	8	1.8
6.5	2.08	7	4.5	7.6	1.5	8	1.9
6.5	2.2	7	5	7.6	1.6	8	2
6.5	2.5	7	5.5	7.6	1.8	8	2.02
6.5	3	7	6	7.6	1.9	8	2.1
6.5	3.2	7	12	7.6	2	8	2.2
6.5	3.5	7.01	1.19	7.6	2.4	8	2.4
6.5	4	7.06	1.17	7.6	2.62	8	2.5
6.5	4.75	7.1	1.5	7.6	3	8	2.6
6.5	5	7.1	1.6	7.6	4	8	2.62
6.55	1	7.1	1.8	7.62	1.27	8	2.8
6.55	1.1	7.14	3.57	7.64	1.63	8	3
6.55	1.55	7.2	1	7.65	1.63	8	3.3
6.55	3.7	7.2	1.3	7.65	1.68	8	3.5
6.6	2.4	7.2	1.78	7.65	2.62	8	3.7
6.7	1.4	7.2	1.9	7.65	2.65	8	4
6.7	1.5	7.2	2.2	7.66	1.78	8	4.2
6.7	1.8	7.2	2.4	7.66	2.4	8	4.5
6.7	1.9	7.2	4.9	7.7	0.8	8	5
6.7	2	7.24	2.44	7.7	1.5	8	6
6.71	2.01	7.28	1.78	7.7	1.9	8	8
6.75	1.78	7.3	1.2	7.7	2	8.04	1
6.8	1.3	7.3	1.78	7.75	2.62	8.1	1.6
6.8	1.6	7.3	2.2	7.8	1.25	8.1	2.1
6.8	1.85	7.3	2.4	7.8	1.6	8.13	1.78
6.8	1.9	7.3	2.7	7.8	1.75	8.2	1.65
6.8	2	7.3	3.2	7.8	1.8	8.2	1.9
6.8	2.2	7.37	1.14	7.8	1.9	8.2	2
6.8	2.4	7.4	2	7.8	2	8.28	1.3
6.8	2.62	7.4	3	7.8	2.5	8.3	1
6.85	1.1	7.44	0.99	7.8	5	8.3	2.4
6.86	1.78	7.5	0.8	7.87	1.37	8.32	1.78
6.9	1.8	7.5	1	7.9	0.51	8.38	1.27
6.9	2.65	7.5	1.2	7.9	0.79	8.4	1.8
6.9	3.5	7.5	1.27	7.9	0.8	8.4	2.5
6.97	3.53	7.5	1.3	7.9	1.25	8.43	0.79

d1	d2	d1	d2	d1	d2	d1	d2	d1	d2	d1	d2
8.45	2.15	9	2.5	9.5	2.2	10	1.4	10.5	1.83	11	1.25
8.48	1.78	9	2.6	9.5	2.4	10	1.5	10.5	1.9	11	1.3
8.5	1	9	2.65	9.5	2.5	10	1.6	10.5	2	11	1.5
8.5	1.27	9	2.75	9.5	2.62	10	1.78	10.5	2.25	11	1.6
8.5	1.35	9	2.9	9.5	2.75	10	1.8	10.5	2.3	11	1.75
8.5	1.5	9	3	9.5	2.8	10	1.9	10.5	2.4	11	1.8
8.5	1.6	9	3.2	9.5	2.9	10	2	10.5	2.5	11	1.85
8.5	1.8	9	3.5	9.5	3	10	2.1	10.5	2.6	11	1.9
8.5	1.9	9	4	9.5	3.2	10	2.2	10.5	2.7	11	2
8.5	2	9	4.5	9.5	3.5	10	2.4	10.5	3	11	2.2
8.5	2.5	9	5	9.5	4.5	10	2.5	10.5	3.25	11	2.25
8.5	3	9	5.5	9.5	5	10	2.6	10.5	3.5	11	2.3
8.5	3.5	9	6	9.5	6	10	2.65	10.5	4.5	11	2.4
8.5	4	9	10	9.5	6.7	10	2.7	10.5	5.9	11	2.5
8.51	0.9	9.02	1.78	9.52	1.78	10	2.8	10.52	1.83	11	2.75
8.51	1.78	9.1	1.6	9.52	2.61	10	3	10.57	1.5	11	2.8
8.55	2.1	9.1	1.65	9.53	1.14	10	3.1	10.6	1	11	3
8.56	2.62	9.12	1.7	9.6	1.6	10	3.3	10.6	1.3	11	3.2
8.6	1.6	9.12	3.53	9.6	2	10	3.5	10.6	1.8	11	3.5
8.6	2.4	9.13	2.62	9.6	2.3	10	4	10.6	2	11	4
8.6	3	9.19	1.78	9.6	2.4	10	4.5	10.6	2.3	11	4.5
8.6	3.3	9.19	2.62	9.6	2.5	10	5	10.6	2.4	11	5
8.64	2.03	9.2	1	9.6	2.95	10	6	10.6	2.6	11	5.2
8.65	1.78	9.2	1.1	9.6	4.8	10	6.5	10.6	2.65	11	5.3
8.66	1.05	9.2	1.6	9.65	0.66	10	7	10.6	4.5	11	5.5
8.7	1.65	9.2	1.9	9.66	1.78	10	8	10.6	6.7	11	6
8.7	2	9.2	2	9.7	1	10	10	10.64	1.12	11	7
8.7	2.9	9.2	2.65	9.7	1.27	10.1	1	10.69	3.53	11	8
8.73	1.78	9.2	3.5	9.7	1.3	10.1	1.6	10.7	1.1	11.08	1.8
8.76	1.8	9.24	1.52	9.75	1.78	10.1	1.7	10.77	2.95	11.1	1.2
8.8	1.4	9.25	1.78	9.75	2.35	10.1	1.75	10.78	2.62	11.1	1.6
8.8	1.9	9.25	1.83	9.75	2.5	10.1	1.8	10.8	1.2	11.1	2.3
8.8	2.4	9.25	1.86	9.8	0.56	10.15	2.34	10.8	1.3	11.1	5.5
8.8	2.7	9.25	2.62	9.8	1	10.16	1.57	10.8	1.5	11.11	1.59
8.8	3.2	9.3	1.5	9.8	1.5	10.2	2.4	10.8	1.6	11.11	1.78
8.9	1.5	9.3	2	9.8	1.6	10.2	2.5	10.8	1.7	11.11	2.38
8.9	1.6	9.3	2.2	9.8	1.7	10.28	2.66	10.8	1.75	11.18	1.27
8.9	1.8	9.3	2.4	9.8	1.9	10.3	1.2	10.8	1.8	11.2	1.3
8.9	1.9	9.3	3	9.8	2.4	10.3	1.7	10.8	1.9	11.2	1.8
8.9	2.6	9.4	1	9.8	2.7	10.3	2.05	10.8	2	11.2	1.9
8.9	2.7	9.4	1.02	9.8	2.8	10.3	2.4	10.8	2.2	11.2	2.2
8.92	1.83	9.4	1.9	9.8	3	10.3	3	10.8	2.4	11.2	2.3
9	0.8	9.4	2.1	9.83	1.85	10.32	1.78	10.8	2.6	11.2	2.5
9	1	9.4	2.3	9.88	0.56	10.35	1.92	10.8	2.65	11.2	2.75
9	1.2	9.5	0.8	9.9	1.8	10.4	1	10.8	2.75	11.2	4.3
9	1.4	9.5	1	9.9	1.9	10.4	2.2	10.8	2.8	11.2	7.6
9	1.5	9.5	1.3	9.9	2.4	10.4	2.5	10.8	3	11.3	1.2
9	1.6	9.5	1.4	9.9	2.6	10.4	2.8	10.82	1.28	11.3	1.3
9	1.65	9.5	1.5	9.92	1.83	10.4	4	10.82	1.78	11.3	1.6
9	1.8	9.5	1.6	9.92	1.9	10.45	2	10.85	2.75	11.3	1.75
9	1.85	9.5	1.7	9.92	2.62	10.46	5.33	10.9	1.25	11.3	2
9	2	9.5	1.8	10	0.6	10.5	1	10.9	2.03	11.3	2.2
9	2.2	9.5	1.9	10	1	10.5	1.5	11	0.7	11.3	2.4
9	2.25	9.5	2	10	1.25	10.5	1.75	11	1	11.3	2.5
9	2.3	9.5	2.1	10	1.3	10.5	1.8	11	1.2	11.3	2.7

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
11.4	1.7	11.99	0.81	12.3	2.4	12.8	2.8
11.4	2.1	12	1	12.3	2.5	12.8	3.2
11.4	4.4	12	1.2	12.37	2.62	12.8	4.5
11.5	1	12	1.5	12.37	2.76	12.9	1.24
11.5	1.25	12	1.6	12.4	1	12.9	9.9
11.5	1.3	12	1.7	12.4	1.9	12.95	0.86
11.5	1.5	12	1.75	12.4	2	13	1
11.5	1.6	12	1.8	12.4	2.18	13	1.2
11.5	1.78	12	1.85	12.4	2.6	13	1.25
11.5	1.9	12	1.9	12.4	2.7	13	1.3
11.5	2	12	2	12.42	1.78	13	1.4
11.5	2.1	12	2.25	12.45	1.02	13	1.5
11.5	2.2	12	2.4	12.47	1.78	13	1.6
11.5	2.4	12	2.5	12.5	1	13	1.7
11.5	2.5	12	2.7	12.5	1.1	13	2
11.5	2.7	12	2.75	12.5	1.5	13	2.15
11.5	2.8	12	2.8	12.5	1.7	13	2.35
11.5	3	12	3	12.5	1.75	13	2.4
11.5	3.5	12	3.05	12.5	1.8	13	2.5
11.5	4	12	3.2	12.5	2	13	2.6
11.6	1.2	12	3.25	12.5	2.2	13	2.7
11.6	1.6	12	3.3	12.5	2.25	13	2.75
11.6	1.7	12	3.5	12.5	2.5	13	2.8
11.6	1.78	12	3.8	12.5	2.6	13	3
11.6	2.3	12	4	12.5	2.65	13	3.2
11.6	2.4	12	4.5	12.5	2.75	13	3.28
11.6	2.5	12	5	12.5	3	13	3.5
11.6	2.8	12	5.5	12.5	3.2	13	3.6
11.6	2.9	12	6	12.5	3.5	13	3.8
11.6	2.95	12	7	12.5	4.2	13	4
11.6	6.35	12	8	12.5	8	13	4.5
11.64	1.78	12	9	12.6	2.4	13	5
11.7	2.3	12	10	12.6	2.5	13	5.5
11.7	2.62	12.07	5.33	12.6	2.7	13	6
11.7	2.7	12.1	1.3	12.6	3.25	13	8
11.7	3.5	12.1	1.6	12.6	3.5	13.1	1.6
11.7	5.8	12.1	1.7	12.6	3.6	13.1	2.62
11.77	3.15	12.1	1.8	12.64	1.78	13.1	3.18
11.8	1.5	12.1	1.9	12.65	2.77	13.2	1.6
11.8	1.8	12.1	2.1	12.7	1.6	13.2	1.78
11.8	1.9	12.1	2.2	12.7	1.7	13.2	1.8
11.8	2.1	12.1	2.35	12.7	1.8	13.2	1.9
11.8	2.3	12.1	2.4	12.7	2	13.2	2.5
11.8	2.4	12.1	2.7	12.7	2.62	13.2	2.65
11.8	2.5	12.17	1.27	12.7	2.8	13.23	1.78
11.8	2.65	12.2	1.3	12.7	3.18	13.3	1.8
11.8	2.8	12.2	1.7	12.7	3.2	13.3	2.2
11.8	3	12.2	1.9	12.7	4.96	13.3	2.4
11.8	3.53	12.2	2.5	12.72	2.62	13.3	3.8
11.8	10	12.2	2.8	12.73	1.57	13.34	1.32
11.84	2.4	12.2	3.2	12.73	1.63	13.34	1.34
11.89	1.98	12.2	4.4	12.78	6.05	13.34	1.8
11.9	1.78	12.25	2.8	12.8	1.6	13.4	1.9
11.9	2.63	12.29	3.53	12.8	1.8	13.4	2.1
11.91	2.62	12.3	1	12.8	2.4	13.4	2.7

d1	d2										
13.4	2.8	14	1.1	14.3	2.4	15	2.5	15.5	3	16	2.5
13.44	2.1	14	1.2	14.3	3.5	15	2.6	15.5	3.1	16	2.6
13.44	2.5	14	1.25	14.3	4	15	2.65	15.5	3.25	16	2.65
13.44	2.62	14	1.3	14.4	1	15	2.7	15.5	3.5	16	2.7
13.46	2.08	14	1.4	14.4	1.8	15	2.9	15.5	3.8	16	2.8
13.5	1	14	1.5	14.4	2	15	3	15.5	4	16	3
13.5	1.3	14	1.6	14.43	1.78	15	3.2	15.5	4.2	16	3.15
13.5	1.5	14	1.78	14.5	1	15	3.5	15.5	4.3	16	3.5
13.5	1.6	14	1.8	14.5	1.5	15	3.55	15.5	4.5	16	3.55
13.5	1.87	14	1.9	14.5	1.6	15	3.8	15.5	5.3	16	4
13.5	2	14	2	14.5	1.65	15	4	15.54	2.62	16	4.25
13.5	2.1	14	2.08	14.5	1.8	15	4.25	15.54	2.82	16	4.5
13.5	2.4	14	2.1	14.5	2	15	4.5	15.55	2.65	16	4.75
13.5	2.5	14	2.2	14.5	2.4	15	5	15.6	1.78	16	5
13.5	2.6	14	2.3	14.5	2.5	15	5.5	15.6	1.96	16	5.5
13.5	2.7	14	2.4	14.5	3	15	5.6	15.6	2	16	5.6
13.5	2.75	14	2.5	14.5	3.5	15	6	15.6	2.3	16	6
13.5	3	14	2.6	14.5	4	15	7	15.6	2.4	16	7
13.5	3.5	14	2.65	14.5	4.5	15	8	15.6	2.5	16	8
13.5	4.25	14	2.7	14.5	5	15	9	15.6	2.6	16	10
13.5	5	14	2.75	14.5	5.7	15	10	15.6	2.95	16	12
13.54	3.6	14	2.8	14.5	5.8	15	12.5	15.6	3	16.03	1.57
13.6	1.6	14	2.9	14.6	2.4	15.08	1.78	15.6	3.25	16.1	1.6
13.6	2	14	3	14.6	2.48	15.08	2.62	15.6	3.4	16.1	1.8
13.6	2.2	14	3.15	14.6	2.6	15.1	1.6	15.7	1.3	16.1	2.25
13.6	2.3	14	3.2	14.6	2.95	15.1	2.6	15.7	2.7	16.1	2.3
13.6	2.4	14	3.5	14.6	3.2	15.1	2.7	15.7	2.9	16.1	2.62
13.6	2.5	14	3.55	14.61	2.52	15.2	1.78	15.8	1.8	16.1	3
13.6	2.7	14	3.9	14.61	3.28	15.2	1.8	15.8	2.4	16.1	3.5
13.6	2.75	14	4	14.63	3.53	15.2	2.8	15.8	4.1	16.2	1.15
13.6	2.8	14	4.5	14.65	2	15.2	4	15.85	2.4	16.2	2.25
13.6	3	14	5	14.68	1.02	15.22	2.62	15.88	1.78	16.3	2.4
13.6	3.6	14	5.3	14.7	1.4	15.24	1.33	15.88	2.36	16.3	2.5
13.64	5.33	14	6	14.7	1.57	15.24	5.33	15.88	2.62	16.3	2.6
13.65	2.62	14	6.5	14.8	1.5	15.3	1.78	15.88	3.96	16.33	0.79
13.7	2.9	14	7	14.8	2.4	15.3	2	15.9	2.3	16.36	2.2
13.7	4.15	14	7.5	14.81	1.02	15.3	2.3	15.9	2.4	16.36	2.21
13.8	1.9	14	8	14.82	1.78	15.3	2.4	15.9	2.55	16.4	1.3
13.8	2	14	10	14.85	1.5	15.3	4.3	15.9	2.7	16.4	1.78
13.8	2.4	14.01	2.62	14.87	3.53	15.39	0.76	16	0.9	16.4	2.2
13.8	2.54	14.1	1	14.9	2.45	15.4	1	16	1	16.5	1
13.8	3	14.1	1.6	14.94	2.92	15.4	1.5	16	1.2	16.5	1.5
13.8	6	14.1	2.2	15	1	15.4	2.1	16	1.25	16.5	2
13.85	1.52	14.1	2.5	15	1.2	15.4	3	16	1.5	16.5	2.25
13.87	1.7	14.12	2.62	15	1.25	15.47	3.53	16	1.6	16.5	2.5
13.87	3.53	14.2	1.2	15	1.3	15.5	1	16	1.7	16.5	3
13.9	2.3	14.2	1.9	15	1.5	15.5	1.25	16	1.78	16.5	3.5
13.9	2.4	14.2	2.8	15	1.6	15.5	1.5	16	1.8	16.5	9
13.94	3.6	14.2	3	15	1.78	15.5	1.55	16	1.9	16.55	2.13
13.95	2.62	14.2	5.5	15	1.8	15.5	1.75	16	2	16.56	1.78
13.95	2.65	14.27	1.59	15	1.82	15.5	1.9	16	2.1	16.6	1
13.95	2.72	14.27	6.35	15	2	15.5	2	16	2.2	16.6	1.78
14	0.41	14.3	0.76	15	2.15	15.5	2.3	16	2.25	16.6	2.4
14	0.55	14.3	1.75	15	2.25	15.5	2.4	16	2.3	16.66	3.53
14	1	14.3	2	15	2.4	15.5	2.5	16	2.4	16.7	1.45

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
16.7	2.5	17.2	1.6	17.86	2.62	18.3	3
16.75	1.78	17.2	1.9	17.86	2.76	18.3	3.6
16.79	1	17.2	2.62	17.86	3.6	18.4	1.78
16.8	2.2	17.2	3	17.9	1.3	18.4	2.7
16.8	2.4	17.2	5.7	17.9	2.6	18.4	2.8
16.8	2.8	17.25	1.2	17.9	2.8	18.42	1.02
16.81	5.33	17.25	3	17.93	1.78	18.42	5.33
16.9	2.7	17.27	4.01	17.93	1.8	18.45	4.45
16.9	2.75	17.3	1	17.93	2.46	18.5	1
17	1	17.3	1.75	17.96	2.62	18.5	1.2
17	1.1	17.3	2.2	18	1	18.5	1.5
17	1.2	17.3	2.4	18	1.15	18.5	1.6
17	1.3	17.3	4	18	1.3	18.5	1.7
17	1.5	17.35	1.5	18	1.5	18.5	1.8
17	1.6	17.37	4.34	18	1.65	18.5	2
17	1.78	17.4	1.6	18	1.8	18.5	2.2
17	1.8	17.4	2.1	18	2	18.5	2.5
17	2	17.4	2.5	18	2.2	18.5	3
17	2.2	17.4	2.55	18	2.3	18.5	3.5
17	2.4	17.4	2.8	18	2.5	18.5	3.7
17	2.5	17.4	3.53	18	2.65	18.5	4.5
17	2.65	17.46	1.59	18	2.75	18.5	5.3
17	2.7	17.46	2.62	18	2.8	18.52	3.75
17	2.8	17.5	1	18	3	18.6	1.3
17	2.9	17.5	1.3	18	3.15	18.6	1.8
17	3	17.5	1.5	18	3.5	18.6	2.3
17	3.2	17.5	1.6	18	3.55	18.6	2.4
17	3.25	17.5	1.8	18	3.7	18.6	2.7
17	3.35	17.5	2	18	4	18.64	3.53
17	3.5	17.5	2.4	18	4.2	18.7	1.3
17	3.55	17.5	2.5	18	4.5	18.7	1.9
17	3.8	17.5	2.6	18	5	18.7	3
17	4	17.5	2.7	18	5.2	18.72	2.62
17	4.2	17.5	3	18	5.75	18.72	2.82
17	4.5	17.5	3.15	18	6	18.72	3.15
17	5	17.5	3.25	18	6.5	18.77	1.78
17	5.33	17.5	3.5	18	7	18.77	1.85
17	5.5	17.5	4	18	8	18.8	1.85
17	6	17.5	4.2	18	8.5	18.8	2
17	6.5	17.5	6.25	18	9	18.8	2.4
17	7	17.5	9	18	9.5	18.8	3
17	8	17.6	1	18	11	18.9	1.7
17	10	17.6	1.83	18.1	1.6	18.9	3
17	12	17.6	2.4	18.2	1.6	19	1
17.04	3.53	17.61	2.62	18.2	1.7	19	1.3
17.1	1.3	17.69	2.62	18.2	1.9	19	1.5
17.1	1.58	17.7	1	18.2	2.6	19	1.6
17.1	1.6	17.7	1.3	18.2	2.7	19	1.7
17.12	1.14	17.74	1.78	18.2	3	19	1.75
17.12	2.62	17.8	1.5	18.2	3.5	19	1.78
17.13	2.62	17.8	1.8	18.2	3.8	19	1.8
17.13	2.79	17.8	2.4	18.27	2.6	19	2
17.16	1.78	17.8	2.6	18.3	1.02	19	2.2
17.2	1	17.8	3	18.3	2.4	19	2.3
17.2	1.5	17.8	10	18.3	2.6	19	2.4

d1	d2										
19	2.5	19.4	14	20	2.42	20.5	3	21.2	2.65	21.95	1.78
19	2.6	19.45	8	20	2.5	20.5	3.2	21.2	3	21.95	2
19	2.65	19.46	2.03	20	2.62	20.5	4	21.2	3.2	22	1
19	2.7	19.5	1	20	2.65	20.5	5	21.2	3.3	22	1.1
19	2.75	19.5	1.5	20	2.7	20.5	5.75	21.2	3.55	22	1.2
19	3	19.5	1.78	20	2.8	20.5	7.5	21.2	3.6	22	1.3
19	3.15	19.5	1.8	20	3	20.6	1.5	21.2	4	22	1.4
19	3.2	19.5	2	20	3.15	20.6	1.9	21.2	4.9	22	1.5
19	3.35	19.5	2.4	20	3.25	20.6	2.3	21.25	2.05	22	1.7
19	3.4	19.5	2.5	20	3.3	20.6	2.4	21.3	1	22	1.78
19	3.5	19.5	2.8	20	3.5	20.63	2.62	21.3	1.6	22	1.8
19	3.55	19.5	3	20	3.55	20.65	5.33	21.3	1.8	22	2
19	3.6	19.5	3.25	20	3.6	20.72	2.62	21.3	2.4	22	2.15
19	4	19.5	3.5	20	4	20.75	3.53	21.3	3.5	22	2.2
19	4.5	19.5	4	20	4.15	20.8	1.5	21.3	3.53	22	2.3
19	5	19.5	5.3	20	4.3	20.8	1.78	21.3	3.6	22	2.4
19	5.5	19.5	6	20	4.4	20.8	1.9	21.3	3.95	22	2.5
19	6	19.5	8	20	4.5	20.8	2.4	21.35	3	22	2.62
19	6.5	19.5	8.4	20	5	20.8	2.7	21.4	1.6	22	2.7
19	6.8	19.51	2.03	20	5.25	20.8	2.8	21.4	2.4	22	3
19	7	19.6	2.3	20	5.33	20.8	4	21.49	2.01	22	3.2
19	8	19.6	2.4	20	5.5	20.9	1.5	21.5	1	22	3.5
19	9	19.6	3	20	5.7	20.9	5.7	21.5	1.2	22	3.6
19	10	19.6	3.53	20	6	20.96	3.28	21.5	1.5	22	3.7
19.05	0.89	19.6	4	20	6.5	21	1	21.5	1.7	22	4
19.05	1.78	19.6	4.8	20	7	21	1.5	21.5	2	22	4.5
19.05	2.62	19.7	1.5	20	7.5	21	1.75	21.5	2.2	22	5
19.05	2.69	19.7	1.7	20	8	21	2	21.5	2.4	22	5.5
19.05	6.35	19.7	2	20	10	21	2.2	21.5	2.5	22	6
19.1	1.6	19.7	2.55	20	12	21	2.4	21.5	2.75	22	6.5
19.1	1.78	19.7	3.5	20.07	0.9	21	2.5	21.5	3	22	6.75
19.1	2.4	19.7	3.6	20.1	1.6	21	2.75	21.5	3.5	22	7
19.17	1.78	19.75	8	20.12	2	21	3	21.5	3.9	22	7.5
19.18	2.46	19.8	1.3	20.15	2.45	21	3.17	21.5	4	22	7.8
19.2	2	19.8	1.78	20.2	1.78	21	3.5	21.5	4.5	22	8
19.2	2.3	19.8	1.98	20.2	2.5	21	4	21.5	5	22	9
19.2	2.4	19.8	2.3	20.2	2.7	21	4.5	21.5	7.2	22	10
19.2	2.5	19.8	2.4	20.2	3	21	5	21.59	5.33	22	11
19.2	2.62	19.8	3.2	20.2	5.3	21	6	21.6	1.78	22	11.5
19.2	3	19.8	3.6	20.2	6	21	6.5	21.6	2	22.05	1.5
19.2	3.4	19.84	2.39	20.22	3.53	21	7	21.6	2.4	22.05	1.6
19.2	4	19.9	2.6	20.22	4.04	21	8	21.65	3.65	22.08	0.8
19.25	1.78	19.99	5.33	20.24	1.78	21	8.5	21.7	1	22.1	1.6
19.3	1.5	20	1	20.29	2.62	21	10	21.7	3.5	22.1	2
19.3	1.78	20	1.2	20.3	2.4	21	12	21.75	3.9	22.1	3.5
19.3	2.2	20	1.3	20.3	3	21.1	1.85	21.8	1.5	22.16	5.35
19.3	2.4	20	1.4	20.35	1.78	21.1	1.9	21.8	2.4	22.2	1.8
19.3	3.5	20	1.5	20.4	2.5	21.1	2.5	21.8	3	22.2	2
19.3	4.5	20	1.6	20.5	1	21.2	1.4	21.8	3.5	22.2	3
19.3	4.6	20	1.7	20.5	1.5	21.2	1.78	21.82	3.15	22.2	3.1
19.4	1.3	20	1.78	20.5	1.8	21.2	1.8	21.82	3.53	22.2	3.2
19.4	2.1	20	1.8	20.5	2	21.2	1.9	21.82	3.71	22.2	3.6
19.4	2.4	20	2	20.5	2.4	21.2	2.2	21.82	4.2	22.2	4.7
19.4	2.6	20	2.2	20.5	2.5	21.2	2.4	21.89	2.62	22.22	2.62
19.4	4.65	20	2.4	20.5	2.6	21.2	2.5	21.92	2.95	22.22	3.5

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
22.22	4.32	23	2.3	23.5	3.72	24	2.8
22.23	3.96	23	2.4	23.5	4	24	3
22.23	6.35	23	2.5	23.5	5	24	3.15
22.26	6.33	23	2.7	23.5	5.25	24	3.5
22.3	2.4	23	2.9	23.5	6	24	3.6
22.3	2.48	23	3	23.5	6.5	24	3.8
22.3	2.5	23	3.2	23.5	7.25	24	4
22.3	3	23	3.23	23.5	8.4	24	4.5
22.33	1.02	23	3.5	23.52	1.83	24	4.8
22.4	1.5	23	3.6	23.53	1.78	24	5
22.4	1.8	23	4	23.55	0.71	24	5.5
22.4	2.5	23	4.33	23.59	1	24	6
22.4	2.65	23	4.5	23.6	1.02	24	6.5
22.4	3.15	23	5	23.6	1.7	24	7
22.4	3.2	23	5.3	23.6	1.8	24	8
22.4	3.55	23	5.5	23.6	2	24	9
22.4	5	23	6	23.6	2.5	24	10
22.42	1.78	23	6.5	23.6	2.65	24	12.5
22.5	1	23	7	23.6	3.15	24	13
22.5	1.4	23	8	23.6	3.2	24.1	1.6
22.5	1.5	23	9	23.6	3.5	24.2	1.78
22.5	2	23	10	23.6	3.55	24.2	2.4
22.5	2.4	23	11	23.7	1.58	24.2	2.5
22.5	2.5	23	12.5	23.7	1.78	24.2	3
22.5	2.75	23	13	23.7	1.9	24.2	3.3
22.5	2.8	23	16	23.7	2.38	24.2	3.5
22.5	3	23.17	5.33	23.7	3.5	24.2	4.1
22.5	3.1	23.2	3.53	23.74	0.61	24.2	5.7
22.5	3.25	23.3	2	23.75	3.53	24.28	1.85
22.5	3.5	23.3	2.4	23.75	5	24.3	2.4
22.5	3.7	23.3	2.9	23.79	6.35	24.4	3
22.5	4	23.3	3	23.8	1.3	24.4	3.1
22.5	4.5	23.3	5.3	23.8	1.6	24.4	3.2
22.5	5	23.35	1.78	23.8	3.5	24.4	3.5
22.5	7	23.4	1.6	23.81	1.78	24.45	1.2
22.53	3.28	23.4	2.3	23.81	2.62	24.5	1
22.6	1.1	23.4	2.7	23.9	5	24.5	1.5
22.6	1.8	23.4	3.53	23.95	3.53	24.5	1.8
22.6	3.2	23.4	4.27	23.99	2.62	24.5	2
22.67	1.78	23.4	5.8	24	1	24.5	2.4
22.7	1.5	23.4	5.99	24	1.1	24.5	2.5
22.7	1.78	23.47	2.62	24	1.2	24.5	2.7
22.7	2.3	23.47	2.95	24	1.3	24.5	2.8
22.7	2.6	23.47	2.96	24	1.5	24.5	3
22.7	2.8	23.5	1	24	1.6	24.5	3.6
22.8	0.8	23.5	1.5	24	1.7	24.5	3.65
22.8	1.5	23.5	1.78	24	1.78	24.5	4
22.8	3.15	23.5	2	24	2	24.5	4.5
22.8	5.3	23.5	2.3	24	2.1	24.5	5.25
22.89	1	23.5	2.4	24	2.2	24.5	5.5
23	1	23.5	2.5	24	2.25	24.5	6
23	1.2	23.5	2.55	24	2.3	24.6	1.8
23	1.5	23.5	2.7	24	2.4	24.6	2.4
23	1.75	23.5	3	24	2.5	24.6	2.9
23	2	23.5	3.5	24	2.7	24.6	3

d1	d2										
24.6	3.15	25	5.7	25.5	5.5	26.34	5.33	27	8	27.8	5
24.6	3.4	25	6	25.6	1.78	26.4	5.2	27	12	27.8	8
24.6	3.5	25	6.5	25.6	5.49	26.5	1	27	13	27.93	5.33
24.6	3.6	25	7	25.67	1.78	26.5	1.2	27	16	28	1
24.64	2.62	25	7.5	25.7	1.5	26.5	1.5	27.1	1	28	1.3
24.66	1.78	25	8	25.7	1.9	26.5	1.7	27.1	1.6	28	1.5
24.7	1.7	25	9	25.7	3.5	26.5	1.8	27.2	5.7	28	1.6
24.7	2.67	25	10	25.8	1.8	26.5	2	27.28	3.53	28	1.7
24.7	3	25	12	25.8	2.65	26.5	2.3	27.3	2.4	28	1.8
24.7	3.5	25	13	25.8	3.2	26.5	2.5	27.3	2.5	28	1.9
24.76	2.62	25	14	25.8	3.53	26.5	2.65	27.3	2.7	28	2
24.77	5	25	15	25.8	3.55	26.5	3	27.3	3.2	28	2.2
24.77	5.33	25	15.5	25.8	6.9	26.5	3.15	27.31	3.28	28	2.3
24.8	1	25.04	2.95	25.9	4.8	26.5	3.25	27.38	0.76	28	2.5
24.8	1.5	25.07	2.62	26	1	26.5	3.5	27.4	2.5	28	2.62
24.8	1.9	25.1	1.6	26	1.2	26.5	3.55	27.4	2.7	28	2.65
24.8	2.2	25.12	1.78	26	1.3	26.5	4	27.4	3	28	2.8
24.8	3.4	25.12	2	26	1.37	26.5	8	27.4	3.53	28	3
24.8	5.5	25.12	2.03	26	1.5	26.57	3	27.4	4	28	3.15
24.8	6	25.2	1.2	26	1.6	26.58	3.53	27.43	4.57	28	3.2
24.8	7	25.2	1.7	26	1.78	26.59	2.95	27.5	1	28	3.25
24.9	3.6	25.2	1.8	26	2	26.6	2.2	27.5	1.1	28	3.4
24.9	3.8	25.2	2.3	26	2.1	26.6	2.4	27.5	1.25	28	3.5
24.99	1.27	25.2	2.5	26	2.15	26.6	3.5	27.5	1.5	28	3.55
24.99	3.53	25.2	2.9	26	2.2	26.64	2.62	27.5	2	28	3.65
25	1	25.2	3	26	2.3	26.7	1.78	27.5	2.3	28	3.7
25	1.2	25.2	3.2	26	2.4	26.7	2.5	27.5	2.4	28	4
25	1.3	25.2	3.5	26	2.5	26.77	2.1	27.5	2.5	28	4.1
25	1.5	25.25	2.8	26	2.6	26.8	1.6	27.5	2.7	28	4.3
25	1.6	25.3	1.6	26	3	26.8	2.5	27.5	3	28	4.4
25	1.7	25.3	2.4	26	3.2	26.8	3	27.5	3.2	28	4.5
25	1.76	25.3	2.6	26	3.5	26.8	4	27.5	4	28	4.75
25	1.8	25.3	3	26	3.6	26.9	1.5	27.5	4.5	28	5
25	2	25.4	1.5	26	3.67	26.9	2	27.5	6	28	5.3
25	2.2	25.4	1.58	26	3.7	27	1	27.5	6.8	28	5.5
25	2.3	25.4	2.5	26	4	27	1.15	27.5	7.5	28	6
25	2.4	25.4	3.17	26	4.5	27	1.3	27.56	3.17	28	6.5
25	2.5	25.4	3.18	26	5	27	1.5	27.58	1.7	28	7
25	2.6	25.4	3.5	26	5.5	27	1.78	27.6	1.78	28	8
25	2.65	25.4	3.53	26	6	27	2	27.6	2.2	28	8.5
25	3	25.4	4	26	6.5	27	2.2	27.6	2.4	28	8.75
25	3.15	25.4	6.35	26	7	27	2.5	27.6	6	28	10
25	3.2	25.5	1	26	8	27	2.7	27.7	2.4	28	11
25	3.3	25.5	1.2	26	8.75	27	3	27.7	2.7	28	12
25	3.5	25.5	1.6	26	9	27	3.2	27.7	3.4	28.1	2.62
25	3.55	25.5	1.78	26	10	27	3.5	27.7	3.5	28.1	4.3
25	3.6	25.5	1.8	26	12	27	4	27.8	1.5	28.15	3.2
25	3.7	25.5	2	26.07	2.62	27	4.5	27.8	1.78	28.17	3.53
25	4	25.5	2.5	26.2	2.3	27	5	27.8	2	28.17	3.73
25	4.15	25.5	3	26.2	3	27	5.25	27.8	2.62	28.2	1
25	4.3	25.5	3.2	26.2	3.6	27	5.33	27.8	3	28.2	3
25	4.5	25.5	3.5	26.25	2.35	27	5.5	27.8	3.2	28.2	5.3
25	5	25.5	3.7	26.3	2	27	6	27.8	3.5	28.25	2.62
25	5.33	25.5	4.5	26.3	2.4	27	6.5	27.8	3.53	28.3	1
25	5.5	25.5	5	26.33	2	27	7	27.8	3.6	28.3	1.6

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
28.3	1.78	29.1	2.55	30	1.8	30.5	7
28.3	1.8	29.1	3	30	1.82	30.5	15
28.3	2	29.2	2.62	30	2	30.6	1
28.3	2.4	29.2	3	30	2.2	30.7	3.5
28.3	2.7	29.2	3.3	30	2.3	30.75	1
28.3	3.1	29.2	3.5	30	2.4	30.8	1.78
28.3	3.55	29.2	4.7	30	2.5	30.8	2.5
28.4	3	29.25	1.6	30	2.65	30.8	3.53
28.42	2.62	29.28	2.8	30	2.7	30.8	3.6
28.45	3.18	29.3	1	30	2.8	30.8	3.7
28.5	1	29.3	1.78	30	3	30.8	4.5
28.5	1.5	29.3	2.62	30	3.1	30.81	3.78
28.5	1.8	29.3	3.6	30	3.15	30.95	2.64
28.5	2	29.4	1	30	3.2	31	1.5
28.5	2.5	29.4	3	30	3.5	31	1.7
28.5	3	29.4	3.1	30	3.55	31	2
28.5	3.3	29.45	4.39	30	3.6	31	2.1
28.5	3.5	29.5	1	30	3.7	31	2.2
28.5	4	29.5	1.2	30	4	31	2.5
28.5	4.25	29.5	1.5	30	4.3	31	3
28.5	4.5	29.5	2	30	4.4	31	3.5
28.56	2.38	29.5	2.3	30	4.5	31	3.7
28.6	1.6	29.5	2.5	30	4.8	31	3.8
28.6	2.2	29.5	2.7	30	5	31	4
28.6	3.5	29.5	3	30	5.33	31	4.5
28.7	3.5	29.5	3.15	30	5.5	31	4.7
28.75	3.53	29.5	3.5	30	5.7	31	5
28.8	2.5	29.5	3.6	30	5.8	31	5.3
28.8	3.2	29.5	4.5	30	6	31	5.5
28.8	3.53	29.5	5	30	6.5	31	6
28.87	1.78	29.5	5.7	30	7	31	6.4
28.88	3.28	29.5	8.5	30	7.5	31	6.5
28.9	3	29.51	5.33	30	8	31	8
28.9	3.1	29.6	2.4	30	9	31	9
28.9	3.6	29.69	1.14	30	10	31	9.5
29	1	29.7	1	30	11	31	10
29	1.5	29.7	2.7	30	12	31	12
29	1.78	29.7	2.8	30	13	31	14
29	1.8	29.7	3	30	17.5	31	15
29	2	29.7	3.5	30.1	2.62	31	18.5
29	2.5	29.74	2.95	30.16	2.38	31.1	0.8
29	3	29.75	1	30.2	1	31.1	1.4
29	3.15	29.75	3.53	30.2	3	31.12	5.33
29	3.3	29.8	1	30.2	3.6	31.14	0.79
29	3.5	29.8	3.2	30.23	1.27	31.2	2.4
29	4	29.8	4.5	30.3	2.4	31.2	3
29	4.5	29.82	2.62	30.3	5.7	31.2	3.5
29	5	29.87	1.52	30.35	3.6	31.2	4.7
29	6	29.87	1.78	30.43	1.78	31.3	2
29	8	29.9	1	30.5	1	31.3	3.5
29	8.3	29.9	3.53	30.5	1.5	31.34	1.98
29	8.5	29.92	2.62	30.5	2	31.34	3.53
29	10	30	1	30.5	2.5	31.4	5
29	16	30	1.2	30.5	3	31.42	1.5
29.1	1.6	30	1.5	30.5	5	31.42	1.78

d1	d2										
31.42	2.6	32	2.6	32.6	1.2	33.5	1	34	4	34.65	1.78
31.42	2.62	32	2.7	32.6	1.8	33.5	1.5	34	4.1	34.7	2.8
31.42	2.8	32	2.8	32.6	2.4	33.5	1.6	34	4.5	34.7	3.5
31.47	1.78	32	3	32.69	5.33	33.5	1.8	34	4.7	34.7	4.3
31.5	1.2	32	3.2	32.7	1.3	33.5	2	34	5	34.8	3
31.5	1.5	32	3.5	32.7	1.5	33.5	2.5	34	5.5	35	1
31.5	1.75	32	3.53	32.7	3	33.5	2.65	34	5.75	35	1.2
31.5	1.8	32	3.6	32.7	5.33	33.5	2.8	34	6	35	1.25
31.5	1.95	32	4	32.7	6.5	33.5	3	34	7	35	1.5
31.5	2	32	4.2	32.9	5.3	33.5	3.15	34	7.5	35	1.9
31.5	2.5	32	4.5	32.92	3.53	33.5	3.5	34	8	35	2
31.5	2.65	32	5	32.92	5.33	33.5	3.55	34	10	35	2.1
31.5	3	32	5.5	32.92	5.53	33.5	4	34	11	35	2.15
31.5	3.15	32	5.7	33	1	33.5	4.6	34	12	35	2.2
31.5	3.3	32	6	33	1.2	33.5	5	34.1	3	35	2.5
31.5	3.5	32	6.2	33	1.5	33.5	5.2	34.1	3.6	35	2.6
31.5	3.55	32	6.5	33	1.78	33.5	6	34.2	2	35	2.8
31.5	3.65	32	7	33	2	33.5	7	34.2	2.3	35	3
31.5	4	32	8	33	2.5	33.5	13	34.2	2.8	35	3.1
31.5	4.5	32	9	33	2.62	33.55	3.71	34.2	3	35	3.2
31.5	5	32	10	33	2.8	33.6	1.78	34.2	3.3	35	3.3
31.5	5.3	32	12	33	3	33.6	2.7	34.29	1.19	35	3.5
31.5	6	32	13.5	33	3.5	33.6	4	34.29	5.33	35	3.6
31.5	6.5	32	14	33	4	33.6	6	34.3	2.5	35	4
31.6	1.32	32	16	33	4.5	33.7	2	34.3	4.6	35	4.25
31.6	1.6	32.05	1.55	33	5	33.7	2.2	34.3	5	35	4.5
31.6	2.4	32.1	1.6	33	5.2	33.7	3	34.4	3.1	35	5
31.63	2	32.11	3.45	33	5.7	33.7	3.5	34.42	2.95	35	5.3
31.7	3.2	32.15	3.53	33	6	33.7	3.7	34.5	1	35	5.33
31.7	3.5	32.2	1.4	33	6.5	33.71	3.53	34.5	1.5	35	6
31.74	1.78	32.2	2.5	33	7	33.77	2.65	34.5	1.7	35	7
31.75	1.57	32.2	3	33	7.5	33.99	2.34	34.5	1.8	35	8
31.75	1.6	32.2	4	33	8	34	1	34.5	2	35	9
31.75	2.03	32.21	1.78	33	9	34	1.1	34.5	2.35	35	10
31.75	3.17	32.3	2	33	10	34	1.2	34.5	2.4	35	12
31.75	6.35	32.3	5.7	33	12	34	1.4	34.5	2.5	35	15
31.8	1	32.4	2.1	33	14	34	1.5	34.5	2.65	35	21
31.8	1.4	32.4	3	33.05	1.78	34	1.6	34.5	3	35.1	1
31.8	1.5	32.5	1.5	33.12	1.52	34	1.7	34.5	3.5	35.1	1.6
31.8	1.6	32.5	1.7	33.12	3.53	34	1.75	34.5	3.55	35.2	1
31.8	3.2	32.5	1.8	33.2	1.3	34	1.9	34.5	3.65	35.2	2.4
31.8	3.5	32.5	2	33.2	2.4	34	2	34.5	3.7	35.2	2.5
32	1	32.5	2.2	33.2	3.5	34	2.1	34.5	4	35.2	2.62
32	1.1	32.5	2.4	33.21	3.53	34	2.16	34.5	4.5	35.2	3
32	1.25	32.5	2.5	33.27	1.58	34	2.3	34.5	5	35.2	3.5
32	1.3	32.5	2.6	33.27	1.78	34	2.4	34.5	5.5	35.2	4
32	1.5	32.5	2.65	33.3	1.3	34	2.5	34.5	7	35.2	5
32	1.6	32.5	2.85	33.3	2	34	2.6	34.52	3.53	35.2	5.7
32	1.78	32.5	3	33.3	2.4	34	3	34.57	1.25	35.3	2.4
32	1.8	32.5	3.5	33.3	2.6	34	3.2	34.59	2.62	35.3	2.5
32	2	32.5	3.55	33.3	4	34	3.25	34.6	1.78	35.3	4.5
32	2.2	32.5	3.6	33.32	3.53	34	3.5	34.6	2.4	35.3	4.9
32	2.3	32.5	4	33.34	2.38	34	3.6	34.6	2.6	35.31	2.62
32	2.4	32.5	5	33.4	2	34	3.75	34.6	4	35.4	2.2
32	2.5	32.5	5.7	33.4	3	34	3.8	34.62	2	35.4	3

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
35.4	3.1	36.1	3.53	37	4.5	38	1
35.4	3.2	36.17	1.02	37	5	38	1.2
35.4	3.25	36.17	1.78	37	5.3	38	1.5
35.5	1	36.17	2.38	37	5.5	38	1.7
35.5	1.5	36.17	2.62	37	6	38	1.8
35.5	1.78	36.2	1.52	37	8	38	2
35.5	1.8	36.2	1.57	37	10	38	2.4
35.5	2	36.2	1.8	37.1	1	38	2.5
35.5	2.5	36.2	2	37.1	1.6	38	2.6
35.5	2.65	36.2	2.4	37.1	1.8	38	2.7
35.5	3	36.2	2.6	37.1	2.1	38	3
35.5	3.15	36.2	2.65	37.1	2.62	38	3.5
35.5	3.55	36.2	3	37.2	2.5	38	3.6
35.5	4	36.2	3.7	37.2	3	38	4
35.5	4.5	36.2	5.7	37.2	3.53	38	4.5
35.5	6.4	36.25	1.14	37.2	3.6	38	5
35.5	11.5	36.27	1.78	37.2	4.1	38	5.2
35.5	16.5	36.36	2.62	37.2	5.7	38	5.3
35.52	2.53	36.4	3.8	37.21	2.62	38	5.5
35.6	3.6	36.5	1	37.3	1.5	38	6
35.7	2.62	36.5	1.5	37.3	3.5	38	6.5
35.7	3.5	36.5	1.8	37.3	3.6	38	7
35.76	1.02	36.5	2	37.4	4.5	38	7.1
35.8	1	36.5	2.5	37.42	3	38	8
35.97	1.78	36.5	2.65	37.46	3	38	9
36	1	36.5	3	37.47	3	38	10
36	1.3	36.5	3.5	37.47	5.33	38	12
36	1.5	36.5	3.55	37.5	1.25	38	20
36	1.78	36.5	3.75	37.5	1.5	38.1	1.35
36	1.8	36.5	6	37.5	2	38.1	1.59
36	2	36.51	6.99	37.5	2.5	38.1	3.18
36	2.2	36.6	1.6	37.5	2.65	38.1	6.35
36	2.3	36.6	2.2	37.5	3	38.1	11.1
36	2.5	36.6	2.5	37.5	3.15	38.12	2.39
36	2.7	36.6	3	37.5	3.5	38.2	2
36	3	36.7	2	37.5	3.55	38.2	3.6
36	3.2	36.8	1	37.5	4	38.2	4.7
36	3.5	36.8	1.2	37.5	4.5	38.2	5
36	3.53	36.8	3	37.5	5.3	38.35	1.27
36	3.8	36.83	3.28	37.6	1.2	38.4	1.6
36	4	36.9	1.2	37.6	2.4	38.4	2
36	4.5	36.9	5.3	37.6	4.5	38.5	1.5
36	4.6	36.91	1.19	37.69	3.53	38.5	1.93
36	5	37	1	37.7	3	38.5	2
36	5.37	37	1.2	37.7	3.5	38.5	2.3
36	5.5	37	1.5	37.7	4	38.5	2.5
36	5.7	37	1.8	37.7	5.3	38.5	3
36	6	37	2	37.7	5.53	38.5	3.5
36	6.5	37	2.4	37.77	2.62	38.5	6.3
36	7	37	2.5	37.8	2	38.5	8.5
36	8	37	2.6	37.8	2.38	38.7	2.65
36	9	37	3	37.82	1.6	38.7	2.8
36	10	37	3.5	37.82	1.78	38.7	3.5
36	11	37	3.6	37.82	2	38.7	3.55
36.07	1.78	37	4	37.9	3.51	38.7	5.3

d1	d2										
38.86	1.19	39.5	8.5	40	18	41.2	1.8	42	4.2	43	1.5
38.9	1.45	39.5	10	40.04	2.62	41.2	2.65	42	4.5	43	1.6
39	1	39.6	2.4	40.06	2.7	41.2	3	42	5	43	1.8
39	1.2	39.6	3.7	40.2	1.75	41.2	3.55	42	5.2	43	2
39	1.5	39.69	2.38	40.2	3	41.2	4.7	42	5.4	43	2.2
39	1.6	39.69	3.53	40.2	5.3	41.2	5.3	42	5.5	43	2.5
39	1.78	39.7	3.5	40.3	2.4	41.2	5.7	42	5.6	43	2.8
39	2	39.7	3.6	40.5	2	41.28	1.59	42	6	43	3
39	2.2	39.7	4.35	40.5	2.4	41.28	3.53	42	6.4	43	3.2
39	2.5	39.76	3	40.5	2.5	41.3	1.6	42	7	43	3.5
39	3	39.8	2.2	40.5	3	41.3	1.8	42	7.5	43	4
39	3.2	39.9	3.53	40.5	3.4	41.3	2.62	42	8	43	4.5
39	3.5	40	1	40.5	3.5	41.3	2.7	42	9	43	5
39	4	40	1.2	40.5	4.5	41.3	3.17	42	10	43	5.2
39	4.3	40	1.25	40.5	5	41.3	3.2	42	11	43	5.5
39	4.5	40	1.5	40.5	5.5	41.3	4	42	11.7	43	6
39	5	40	1.6	40.5	6	41.37	1.78	42	12	43	6.5
39	5.3	40	1.8	40.59	2.62	41.4	5.3	42	13	43	8
39	5.5	40	2	40.6	3.2	41.5	1.5	42	14	43	9
39	6	40	2.2	40.6	3.53	41.5	1.6	42	16	43	10
39	6.2	40	2.4	40.65	5.33	41.5	2.9	42	20	43	11
39	6.3	40	2.5	40.7	3	41.5	3	42.2	1.5	43	12
39	6.5	40	2.65	40.7	3.5	41.5	3.15	42.2	1.8	43	16
39	7.2	40	2.8	40.8	3.5	41.5	3.5	42.2	3	43	20
39	8	40	3	40.8	3.8	41.5	4	42.2	5.7	43.2	2
39	10	40	3.15	40.8	4.7	41.5	4.5	42.4	1.2	43.2	3
39.1	1.3	40	3.2	40.87	3.53	41.5	6	42.4	4.13	43.4	1.8
39.2	1.9	40	3.3	40.95	2.62	41.6	1.6	42.4	5.33	43.4	3.6
39.2	2	40	3.5	40.99	5.33	41.6	1.78	42.42	1.78	43.5	3
39.2	2.5	40	3.55	41	1	41.6	2.4	42.5	1.78	43.5	4
39.2	3	40	3.75	41	1.2	41.7	3.5	42.5	1.8	43.5	5.3
39.2	3.7	40	3.9	41	1.4	41.7	4.05	42.5	2.65	43.5	5.4
39.2	3.9	40	4	41	1.5	41.7	4.13	42.5	3	43.55	3.55
39.2	5	40	4.5	41	1.6	41.8	2.6	42.5	3.15	43.69	2.62
39.2	5.7	40	5	41	1.75	41.82	3.53	42.5	3.2	43.69	3
39.2	6	40	5.2	41	1.78	41.83	2.79	42.5	3.5	43.69	3.5
39.34	2.62	40	5.25	41	1.8	41.9	3	42.5	3.55	43.7	1.8
39.37	2.34	40	5.3	41	2	41.91	6.35	42.5	4	43.7	2.8
39.4	1.6	40	5.35	41	2.5	42	1	42.5	4.3	43.7	3
39.4	3.1	40	5.5	41	3	42	1.2	42.5	5.3	43.7	3.5
39.4	6.6	40	5.72	41	3.5	42	1.5	42.5	8	43.7	3.55
39.4	10	40	5.9	41	4	42	1.6	42.5	8.3	43.7	5.3
39.45	1.78	40	6	41	4.5	42	1.78	42.52	2.62	43.8	1.78
39.49	3.53	40	6.4	41	4.6	42	2	42.57	3.53	43.8	4.1
39.5	1.2	40	6.5	41	5	42	2.25	42.6	4	43.82	5.33
39.5	1.5	40	7	41	5.5	42	2.3	42.8	3.53	43.92	2.9
39.5	2	40	7.5	41	6	42	2.5	42.8	3.7	43.99	1.5
39.5	2.4	40	8	41	6.5	42	2.6	42.8	5.33	43.99	2.01
39.5	2.5	40	9	41	7	42	2.7	42.86	3.53	44	1
39.5	3	40	10	41	7.5	42	3	42.86	4.36	44	1.3
39.5	3.2	40	11	41	8	42	3.15	42.86	6.35	44	1.5
39.5	3.25	40	12	41	15	42	3.2	42.9	4.82	44	2
39.5	3.5	40	13	41	21	42	3.5	42.96	3.53	44	2.5
39.5	5.5	40	15	41.1	5.8	42	3.8	43	1	44	2.6
39.5	6	40	16	41.2	1.6	42	4	43	1.3	44	2.8

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
44	3	44.6	2.4	45.7	3.5	47	1.5
44	3.15	44.7	2.9	45.72	1.78	47	1.6
44	3.17	44.7	3	45.84	1.78	47	2
44	3.5	44.7	3.5	46	1	47	2.13
44	3.65	44.8	3.5	46	1.1	47	2.5
44	3.7	44.99	1.78	46	1.2	47	2.6
44	4	45	1	46	1.5	47	2.7
44	4.2	45	1.2	46	2	47	3
44	4.5	45	1.5	46	2.2	47	3.2
44	5	45	1.6	46	2.4	47	3.5
44	5.25	45	2	46	2.5	47	3.7
44	5.34	45	2.5	46	2.6	47	4
44	5.5	45	2.62	46	3	47	4.5
44	6	45	2.75	46	3.2	47	5
44	6.5	45	2.8	46	3.5	47	5.33
44	7	45	3	46	4	47	5.5
44	8	45	3.15	46	4.5	47	6
44	9	45	3.5	46	5	47	6.5
44	11	45	3.55	46	5.34	47	6.7
44	12	45	3.75	46	5.5	47	7
44.04	3.53	45	4	46	6	47	7.5
44.1	1.6	45	4.5	46	7	47	8
44.1	2.6	45	4.8	46	8	47	9
44.12	2.5	45	5	46	10	47	10
44.12	2.62	45	5.3	46	11	47	12
44.17	1.78	45	5.5	46	22	47	16.5
44.2	2	45	6	46.04	3.53	47.11	1
44.2	2.5	45	6.4	46.1	2.4	47.2	1.5
44.2	3	45	6.5	46.2	2	47.2	2.4
44.2	3.3	45	7	46.2	3	47.2	3.3
44.2	3.7	45	7.5	46.2	3.5	47.2	3.5
44.2	5.1	45	8	46.2	3.55	47.2	5.7
44.2	5.7	45	8.5	46.2	5.3	47.22	3.53
44.2	6.7	45	9	46.2	5.33	47.22	5.53
44.2	7.5	45	10	46.4	4.6	47.24	4.27
44.3	5.7	45	12	46.4	5.3	47.29	2.62
44.4	3.1	45	15	46.4	5.4	47.35	1.27
44.4	3.17	45	25	46.5	1.8	47.37	1.78
44.4	4.8	45.2	2.4	46.5	2.5	47.4	4
44.4	5.33	45.2	2.8	46.5	3.5	47.4	4.8
44.45	2.62	45.2	3	46.5	4	47.5	1.5
44.45	3.53	45.2	5.7	46.5	5	47.5	1.8
44.5	1.6	45.3	5.7	46.5	5.33	47.5	2.5
44.5	2	45.36	3.53	46.5	5.7	47.5	2.65
44.5	2.15	45.4	6.5	46.5	6	47.5	2.7
44.5	2.4	45.5	1.2	46.5	7.2	47.5	3
44.5	2.5	45.5	1.5	46.69	2.62	47.5	3.15
44.5	3	45.5	5.5	46.7	1.78	47.5	3.18
44.5	3.18	45.5	6.8	46.7	2.5	47.5	3.2
44.5	3.5	45.6	1.2	46.8	4.1	47.5	3.55
44.5	4.8	45.6	1.5	46.99	1.14	47.5	4
44.5	5.5	45.62	3.53	46.99	3.67	47.5	4.5
44.5	6	45.69	2.62	46.99	5.33	47.5	5.3
44.5	6.25	45.69	3.53	46.99	5.97	47.5	5.33
44.5	8.5	45.7	1.5	47	1	47.5	5.5

d1	d2										
47.5	5.75	48.2	1.2	49.5	5	50.2	3	52	1	53	3.55
47.5	6	48.25	4	49.5	5.5	50.3	2.4	52	1.5	53	3.6
47.5	6.5	48.3	3.2	49.5	6.25	50.4	2.62	52	2	53	4
47.55	1.78	48.32	5.33	49.6	2.4	50.4	3.53	52	2.4	53	4.5
47.55	3.55	48.38	2.62	49.6	3.5	50.47	2.62	52	2.5	53	5
47.6	2.4	48.4	3.5	49.6	5.7	50.5	2.4	52	2.7	53	5.3
47.6	3.53	48.5	1.5	49.65	1.78	50.5	3	52	2.8	53	5.5
47.6	3.6	48.5	3.5	49.7	3.5	50.5	6.3	52	3	53	5.7
47.6	4	48.5	4	49.7	5.3	50.52	1.78	52	3.3	53	5.8
47.6	5.7	48.5	5.8	49.7	5.7	50.8	1.6	52	3.5	53	6
47.6	9.5	48.5	7	49.8	1.8	50.8	1.78	52	3.9	53	7
47.63	3.18	48.7	2.65	50	1	50.8	3.18	52	4	53	10
47.63	3.53	48.7	3.5	50	1.2	50.8	3.2	52	4.5	53	12
47.63	6.99	48.7	3.53	50	1.5	50.8	3.53	52	5	53	14
47.65	1.57	48.7	3.55	50	2	50.8	5.1	52	5.33	53	16
47.7	1.5	48.7	5.3	50	2.35	50.8	6.35	52	5.5	53.09	3
47.7	2.62	48.8	4	50	2.4	50.9	2.4	52	6	53.1	3
47.7	3.5	48.9	2.62	50	2.5	51	1.5	52	6.5	53.19	3.53
47.7	4.75	49	1	50	2.7	51	2	52	7.5	53.25	4
47.8	3	49	1.5	50	2.8	51	2.5	52	8	53.28	0.99
47.96	2.36	49	1.6	50	3	51	3	52	9	53.3	3.53
48	1	49	1.7	50	3.25	51	3.2	52	10	53.3	5.3
48	1.2	49	2	50	3.5	51	3.5	52	12	53.34	2.44
48	1.5	49	2.5	50	3.55	51	3.6	52.07	2.62	53.34	5.33
48	1.55	49	3	50	3.6	51	3.8	52.1	1	53.4	3.5
48	1.7	49	3.5	50	3.85	51	4	52.2	3	53.5	1.2
48	1.78	49	4	50	4	51	4.3	52.2	5.7	53.5	1.5
48	1.8	49	4.5	50	4.5	51	4.5	52.3	1.7	53.5	3
48	2	49	5	50	4.7	51	5	52.3	5.7	53.5	3.53
48	2.5	49	5.3	50	4.8	51	5.2	52.39	3.53	53.5	4
48	2.6	49	5.5	50	5	51	5.5	52.4	5.3	53.5	5.8
48	2.62	49	6	50	5.2	51	6	52.5	1.78	53.5	9
48	2.75	49	6.25	50	5.3	51	9	52.5	1.8	53.52	2.62
48	3	49	7	50	5.33	51	9.5	52.5	2.2	53.57	3.53
48	3.5	49	9	50	5.5	51	10	52.5	3	53.6	2.6
48	3.65	49	12	50	5.7	51	12	52.5	3.5	53.6	3.17
48	4	49.1	5.8	50	6	51	12.5	52.5	4.5	53.6	3.53
48	4.2	49.15	1.78	50	6.5	51.05	1.78	52.5	5.2	53.6	5.64
48	4.5	49.2	1.8	50	7	51.1	1.6	52.5	5.7	53.64	2.65
48	5	49.2	2.4	50	7.5	51.2	3.6	52.5	6.9	53.65	2.62
48	5.3	49.2	3	50	8	51.2	5.3	52.54	5.33	53.67	1.78
48	5.5	49.2	4	50	8.5	51.2	5.7	52.6	1.75	53.8	4
48	6	49.2	4.5	50	9	51.5	1.5	52.6	2.4	53.97	4.76
48	6.1	49.2	5.7	50	10	51.5	2	52.6	2.8	53.98	3.53
48	6.5	49.2	6.3	50	11	51.5	2.1	52.6	3.5	53.98	6.35
48	7	49.21	3.53	50	12	51.5	3.55	52.6	5.7	54	1
48	8	49.22	3.96	50	13.5	51.5	4.5	52.75	1.78	54	1.5
48	9	49.3	5.7	50	15	51.5	5.3	52.9	5.33	54	2
48	10	49.4	2.8	50	16	51.6	2.4	53	1	54	2.3
48	11	49.4	3.1	50.1	3.2	51.6	4.6	53	1.2	54	2.5
48	12	49.44	3.53	50.1	3.3	51.6	5.7	53	1.5	54	2.65
48	13	49.5	2.5	50.16	5.33	51.7	5.3	53	2	54	3
48	16	49.5	3	50.17	1.78	51.8	3	53	2.5	54	3.17
48	22	49.5	3.5	50.17	6.99	51.94	3.53	53	3	54	3.2
48.1	1.2	49.5	4.5	50.2	2.5	51.99	2.77	53	3.5	54	3.5

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
54	4	55	6.5	56.16	5.33	57.3	1.5
54	4.5	55	7	56.16	5.34	57.3	5.2
54	4.75	55	7.5	56.2	3	57.5	5
54	5	55	8	56.2	3.4	57.5	10
54	5.5	55	10	56.4	2.5	57.53	2.08
54.6		55	13	56.5	1.7	57.53	3.35
54	6.3	55	13.5	56.5	2.4	57.6	1.4
54	6.5	55.2	2	56.5	2.45	57.6	2.4
54	7	55.2	3	56.5	3.1	57.6	3.3
54	8	55.2	5.7	56.5	3.5	57.6	5.7
54	9.5	55.25	1.78	56.5	4	57.61	2.16
54	12	55.25	2.62	56.5	5.33	57.65	3.53
54	20	55.3	5.7	56.5	7	57.75	4
54.1	3.18	55.35	2.62	56.5	15	57.8	2.6
54.1	3.7	55.5	1.78	56.52	5.33	57.84	6.35
54.2	1.65	55.5	3	56.6	2.4	58	1
54.2	2.3	55.52	2.62	56.7	2.8	58	1.5
54.2	3	55.56	3.53	56.74	3.53	58	2
54.2	5.3	55.6	5.7	56.74	5.53	58	2.5
54.2	5.7	55.7	2.5	56.79	2.92	58	2.67
54.3	3	55.7	3.75	56.8	6	58	3
54.3	5.7	55.7	4	56.82	2.62	58	3.2
54.4	3.1	55.8	2.1	56.87	1.78	58	3.5
54.4	4.13	55.88	2.03	57	1	58	3.55
54.5	2.5	55.9	2.4	57	1.3	58	4
54.5	2.7	56	1	57	1.5	58	4.2
54.5	3	56	1.4	57	2	58	4.5
54.5	3.55	56	1.5	57	2.5	58	5
54.5	5.5	56	1.78	57	2.6	58	5.3
54.5	7	56	1.8	57	3	58	5.5
54.6	2.4	56	2	57	3.5	58	5.8
54.6	5.7	56	2.3	57	3.53	58	6
54.7	1.4	56	2.4	57	4	58	6.5
54.75	2	56	2.5	57	4.5	58	7
55	1	56	3	57	5	58	7.5
55	1.2	56	3.15	57	5.5	58	8
55	1.5	56	3.2	57	5.7	58	9
55	1.78	56	3.5	57	6	58	10
55	1.8	56	3.55	57	6.5	58	20
55	2	56	4	57	7	58	23
55	2.5	56	4.3	57	8	58.2	3.1
55	2.6	56	4.5	57	9	58.39	1.78
55	3	56	5	57	9.5	58.4	1.3
55	3.2	56	5.2	57	10	58.42	2.62
55	3.5	56	5.3	57	15	58.44	1.78
55	3.7	56	5.5	57	17	58.5	1.25
55	4	56	6	57.1	1.78	58.5	3
55	4.5	56	6.3	57.1	3.2	58.5	3.5
55	4.7	56	6.5	57.14	3.28	58.5	5
55	4.8	56	6.8	57.15	2.03	58.5	5.33
55	5	56	7	57.15	2.24	58.5	5.7
55	5.2	56	7.5	57.15	3.53	58.5	6.2
55	5.33	56	8	57.2	1.6	58.5	6.5
55	5.5	56	10	57.2	3	58.6	3
55	6	56	12	57.2	5.7	58.6	7

d1	d2	d1	d2								
58.7	5.5	60	1.8	60.8	2	62	5	63	6	64	4.5
58.72	6.35	60	2	61	1	62	5.2	63	6.5	64	4.8
58.74	3.53	60	2.2	61	1.5	62	5.5	63	7	64	5
58.75	6.36	60	2.3	61	1.6	62	5.7	63	7.5	64	5.33
58.8	4.2	60	2.5	61	2	62	6	63	8	64	5.5
58.8	6	60	2.62	61	2.5	62	6.5	63	9	64	5.7
58.8	6.2	60	2.65	61	3	62	7	63	10	64	6
58.88	2.62	60	2.8	61	3.2	62	8	63	14	64	6.5
59	1	60	3	61	3.5	62	8.5	63	15	64	7
59	1.5	60	3.15	61	4	62	9	63	16	64	8
59	2	60	3.2	61	4.3	62	10	63.09	3.53	64	9.27
59	2.4	60	3.3	61	4.5	62	11	63.09	3.8	64	9.5
59	2.5	60	3.5	61	5	62	12	63.1	2.2	64	10
59	2.7	60	3.55	61	5.9	62	14	63.1	2.4	64	11
59	3	60	3.65	61	6	62	15	63.12	3.63	64	16
59	3.5	60	4	61	8.5	62	18	63.17	2.62	64.2	1.6
59	4	60	4.2	61	9	62.1	2.62	63.22	1.5	64.2	1.9
59	5	60	4.5	61	10	62.2	3	63.22	1.75	64.2	5
59	5.5	60	4.6	61	12.5	62.2	5.7	63.22	1.78	64.2	5.7
59	6	60	4.8	61.01	2.49	62.23	4.06	63.3	10.75	64.3	1.5
59	6.5	60	5	61.2	1.5	62.3	3.2	63.46	2.89	64.3	5.7
59	7	60	5.3	61.2	4.2	62.3	5.7	63.49	9.53	64.39	1.78
59	10	60	5.34	61.2	5.7	62.33	1.78	63.5	2.7	64.4	3
59	11	60	5.4	61.24	3.53	62.4	2.8	63.5	3.1	64.4	3.1
59	12	60	5.5	61.3	1.78	62.4	4	63.5	3.15	64.4	3.15
59.1	5.8	60	5.7	61.5	1.5	62.4	5.3	63.5	3.2	64.4	4.5
59.18	1.02	60	6	61.5	1.78	62.5	1.3	63.5	3.53	64.47	2.62
59.2	5.33	60	7	61.5	2	62.5	1.8	63.5	3.7	64.5	1.5
59.2	5.7	60	7.5	61.5	2.5	62.5	2.3	63.5	4	64.5	1.8
59.2	11.2	60	8	61.5	2.65	62.5	2.5	63.5	4.3	64.5	2
59.3	3.73	60	8.5	61.5	3.55	62.5	5	63.5	4.5	64.5	2.5
59.3	5	60	9	61.5	5.3	62.6	5.7	63.5	5.33	64.5	2.7
59.3	5.7	60	10	61.5	7	62.8	2.3	63.5	5.5	64.5	3
59.36	3	60	11	61.5	7.5	62.87	2.03	63.5	5.7	64.5	3.2
59.4	2.8	60	12	61.6	2.4	62.87	5.33	63.5	6.35	64.5	3.5
59.4	3.1	60	13	61.6	2.62	62.9	2.4	63.5	6.5	64.5	5.5
59.44	2.01	60	14	61.6	2.7	63	1	63.5	7	64.6	2.4
59.5	2	60	15	61.6	2.9	63	1.3	63.6	4.7	64.6	3.5
59.5	3	60	16	61.6	5.7	63	1.5	63.8	5.66	64.6	5.7
59.5	5.17	60	18	61.7	4.5	63	1.8	63.8	6.2	64.7	3
59.5	6	60	20	61.8	7	63	2	63.88	5.5	64.7	5.3
59.5	6.5	60.04	1.78	61.83	2.36	63	2.4	63.9	2	64.77	1.02
59.52	2.62	60.1	1.6	61.9	3.53	63	2.5	63.9	2.4	64.77	2.49
59.6	2.4	60.1	5.7	61.94	2.24	63	2.65	64	1	64.77	2.62
59.6	5.7	60.2	2.5	62	1.5	63	2.7	64	1.4	64.9	2.6
59.7	3.53	60.2	2.8	62	1.78	63	2.8	64	1.5	64.9	6.6
59.7	5.33	60.2	3	62	2	63	3	64	1.6	65	1
59.7	5.7	60.2	5.35	62	2.5	63	3.2	64	2	65	1.5
59.7	7	60.3	5.33	62	2.6	63	3.5	64	2.5	65	1.7
59.9	2.62	60.3	15	62	3	63	3.55	64	2.6	65	1.8
59.9	5.2	60.33	3.53	62	3.2	63	4	64	2.62	65	2
59.92	3.53	60.4	3.2	62	3.5	63	4.5	64	3	65	2.5
60	1	60.5	2	62	3.53	63	5	64	3.5	65	2.65
60	1.25	60.5	2.25	62	4	63	5.3	64	3.75	65	2.75
60	1.5	60.5	5.5	62	4.5	63	5.5	64	4	65	2.8

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
65	3	66	5	67	7.5	68.8	3.53
65	3.5	66	5.7	67	8	68.8	3.85
65	3.55	66	6	67	10	68.8	5.5
65	4	66	6.5	67	13	68.84	3.68
65	4.5	66	7	67	16	68.95	5.3
65	4.8	66	7.5	67	20	69	1.5
65	5	66	8	67.05	2.05	69	2
65	5.3	66	9	67.1	1.6	69	2.1
65	5.5	66	9.5	67.1	2	69	2.4
65	5.7	66	27	67.2	3.6	69	2.5
65	5.8	66.04	1.78	67.2	5	69	3
65	6	66.04	5.33	67.2	5.7	69	3.5
65	7	66.2	5.7	67.4	4.55	69	3.55
65	7.5	66.27	2.5	67.49	2.26	69	4
65	8	66.27	2.62	67.5	4	69	4.5
65	9	66.27	3.53	67.6	2.4	69	5
65	9.5	66.3	2.38	67.95	2.62	69	5.3
65	10	66.35	2.62	68	1	69	5.5
65	10.5	66.39	1.9	68	1.2	69	5.7
65	11	66.4	1.78	68	1.5	69	6
65	11.2	66.4	5.33	68	1.7	69	8
65	12	66.5	1	68	1.8	69	11
65	13	66.5	1.5	68	2	69.2	5.7
65	15	66.5	2	68	2.4	69.22	5.33
65.1	2.4	66.5	2.5	68	2.5	69.22	7
65.1	3.15	66.6	4.73	68	2.7	69.3	2.4
65.1	3.53	66.6	5.4	68	2.8	69.3	5.7
65.2	5	66.6	5.7	68	3	69.4	2.8
65.32	1.56	66.67	3.53	68	3.2	69.4	3.1
65.35	1.55	66.67	4.76	68	3.5	69.4	5.2
65.4	1.67	66.68	3.52	68	3.53	69.44	3.53
65.5	1.5	66.68	6.35	68	4	69.44	4
65.5	1.55	66.7	2	68	4.5	69.5	2
65.5	1.68	66.7	3.2	68	5	69.5	2.5
65.5	2	66.87	3.53	68	5.33	69.5	3
65.5	3	67	1	68	5.5	69.5	3.5
65.5	3.5	67	1.5	68	6	69.5	4
65.5	4	67	2	68	6.5	69.5	4.5
65.5	5	67	2.1	68	7	69.5	5
65.5	15	67	2.5	68	8	69.5	8
65.6	5.3	67	2.7	68	8.5	69.52	2.62
65.7	1.78	67	2.8	68	10	69.57	1.78
65.8	1.68	67	3	68	12	69.6	2
65.8	1.8	67	3.4	68	15	69.6	2.4
66	1	67	3.5	68.26	3.53	69.6	5.7
66	1.5	67	3.55	68.3	2.4	69.8	5.3
66	2	67	4	68.5	1	69.85	3.53
66	2.2	67	4.3	68.5	1.8	69.85	5.7
66	2.5	67	4.5	68.5	5.9	69.9	3.17
66	2.6	67	5	68.5	6.8	70	0.6
66	3	67	5.3	68.5	7.5	70	1
66	3.5	67	5.33	68.5	12.5	70	1.4
66	3.8	67	5.5	68.52	2.62	70	1.5
66	4	67	6	68.6	2.2	70	1.6
66	4.5	67	7	68.7	5.33	70	1.78

d1	d2										
70	1.8	71	10	73	2	74.3	2.62	75.92	1.78	77	7
70	2	71	11	73	2.2	74.3	5.7	75.97	3.53	77	8
70	2.2	71.12	2.62	73	2.5	74.4	3.1	76	1	77	10
70	2.5	71.2	2	73	2.65	74.5	3	76	1.2	77	12
70	3	71.2	2.2	73	3	74.5	3.1	76	1.5	77.1	2.62
70	3.2	71.2	5.7	73	3.2	74.5	3.2	76	2	77.2	1.26
70	3.37	71.44	3.53	73	3.5	74.5	6	76	2.2	77.2	5.7
70	3.5	71.5	1.2	73	3.55	74.5	6.7	76	2.5	77.22	3.53
70	4	71.5	1.5	73	3.9	74.6	3	76	3	77.3	2.62
70	4.5	71.5	1.6	73	4	74.6	3.53	76	3.2	77.3	4.5
70	4.6	71.5	2	73	4.5	74.6	3.6	76	3.5	77.3	5.7
70	5	71.88	3.48	73	5	74.6	5.7	76	4	77.39	3.53
70	5.5	71.9	6	73	5.3	74.63	5.33	76	4.1	77.4	6.6
70	5.7	72	1.5	73	6	75	1	76	4.25	77.5	1.78
70	5.8	72	2	73	6.99	75	1.5	76	4.5	77.5	2.5
70	6	72	2.1	73	8	75	1.78	76	4.76	77.5	2.62
70	6.5	72	2.5	73	11	75	2	76	5	77.5	3.55
70	7	72	2.8	73	12	75	2.4	76	5.2	77.5	5.3
70	7.5	72	3	73	15	75	2.5	76	5.5	77.5	6
70	8	72	3.25	73.02	3.53	75	2.7	76	5.6	77.62	3.53
70	9.5	72	3.5	73.17	2.62	75	2.8	76	6	77.69	3.53
70	10	72	4	73.18	3	75	3	76	7.65	77.9	5.7
70	11	72	4.2	73.28	5.33	75	3.5	76	8	78	1
70	12	72	4.5	73.39	5.33	75	3.55	76	10	78	1.2
70	15	72	4.75	73.5	2	75	4	76	11	78	1.25
70	17.5	72	5	73.5	3	75	4.5	76	12	78	1.5
70.2	4.2	72	5.5	73.5	5	75	4.8	76	13	78	1.78
70.2	5.7	72	6	73.7	3.6	75	5	76	15	78	2
70.44	3	72	6.99	73.8	4.5	75	5.3	76	20	78	2.3
70.5	2.4	72	7	74	1	75	5.4	76.2	3.17	78	2.5
70.5	2.5	72	7.5	74	1.5	75	5.5	76.2	3.2	78	3
70.5	3	72	8	74	2	75	5.6	76.2	5.33	78	3.5
70.5	4.5	72	8.5	74	2.5	75	5.8	76.2	5.7	78	3.6
70.5	7.2	72	9	74	3	75	6	76.2	6.35	78	4
70.6	5.7	72	10	74	3.15	75	7	76.2	6.8	78	4.3
70.6	7	72	11	74	3.3	75	7.5	76.3	2.4	78	4.5
70.6	8	72	12	74	3.5	75	8	76.5	5.5	78	5
70.8	5.3	72.19	5.33	74	4	75	9	76.5	5.7	78	5.33
70.8	6.2	72.19	5.33	74	4.5	75	10	76.7	4.5	78	5.5
71	1.5	72.2	5.7	74	5	75	12.5	76.9	3.53	78	6
71	1.65	72.4	1.78	74	5.5	75	13	76.94	1.78	78	6.5
71	2	72.4	5.33	74	5.7	75	15	76.99	2.45	78	8
71	2.5	72.5	1.5	74	6	75	16	77	1	78	10
71	2.65	72.5	2.4	74	6.4	75.5	2	77	1.5	78	13
71	3	72.5	3.5	74	7	75.5	9.5	77	1.8	78	16
71	3.5	72.5	4	74	7.5	75.56	6.99	77	2	78.2	5.7
71	3.55	72.5	5	74	8	75.57	3.53	77	2.5	78.5	1.78
71	4	72.5	6.5	74	9	75.57	5.33	77	3	78.5	2.5
71	4.5	72.62	3.53	74	10	75.6	2	77	3.5	78.5	5
71	5	72.62	5.33	74	11	75.7	9.45	77	4	78.5	5.7
71	5.3	72.69	2.62	74	14	75.8	3.53	77	4.3	78.5	6
71	8	72.76	1.78	74.1	3.3	75.8	3.8	77	4.5	78.6	1
71	8.5	73	1	74.1	8.4	75.8	5.33	77	5	78.74	2.62
71	9	73	1.2	74.14	2.62	75.87	2.62	77	5.5	78.74	5.33
71	9.5	73	1.5	74.2	5.7	75.92	1.68	77	6	78.8	5.1

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
78.8	6.81	80	3	81	5.5	82.5	9
78.97	3.53	80	3.2	81	6	82.55	3.18
79	1.5	80	3.33	81	7	82.6	2.2
79	1.78	80	3.5	81	14	82.6	4
79	2	80	3.55	81.15	4.52	82.7	5.7
79	2.1	80	3.6	81.2	5.7	82.8	5
79	2.4	80	3.8	81.4	3	82.8	5.9
79	2.5	80	4	81.5	1.25	82.87	5.33
79	2.6	80	4.3	81.5	1.5	82.9	2
79	3	80	4.5	81.5	2.5	83	1
79	3.17	80	4.8	81.5	2.8	83	1.5
79	3.2	80	5	81.5	4	83	2
79	3.5	80	5.3	81.5	6	83	2.5
79	4	80	5.5	81.51	2.5	83	3
79	4.5	80	5.7	81.52	3.53	83	3.2
79	5	80	5.8	81.6	2.2	83	3.25
79	5.7	80	6	81.7	1.78	83	3.5
79	6	80	6.3	81.7	7	83	3.75
79	6.3	80	6.5	81.75	1.8	83	4
79	7	80	7	81.9	1.78	83	4.5
79	8	80	7.5	81.9	5.3	83	5
79.05	2.62	80	8	81.92	5.33	83	5.5
79.2	2.7	80	8.5	81.92	6.99	83	6
79.2	4	80	9	82	1.5	83	6.5
79.2	5.7	80	10	82	2	83	7
79.2	7.5	80	11	82	2.4	83	9
79.3	2.5	80	12	82	2.5	83	10
79.3	3.53	80	13	82	3	83	12
79.3	5.3	80	15	82	3.4	83.05	3.51
79.3	5.7	80	16.5	82	3.5	83.2	2
79.4	2	80.42	2.62	82	4	83.2	5.7
79.4	3.1	80.44	1.78	82	4.5	83.4	3.5
79.4	4.75	80.5	1.75	82	5	83.5	1.2
79.4	6.1	80.5	2	82	5.3	83.5	1.25
79.5	2	80.5	2.4	82	5.5	83.5	3
79.5	2.5	80.5	4	82	6	83.5	3.3
79.5	2.62	80.5	7	82	6.5	83.5	5
79.5	3	80.6	2.62	82	7	83.7	4.5
79.5	4	80.7	3.6	82	7.5	83.8	2.62
79.5	5.2	80.8	2.3	82	8	84	1.5
79.5	7	80.8	2.6	82	10	84	1.78
79.6	5.7	80.8	5.33	82	12	84	2
79.62	3.53	80.85	3.53	82.14	3.53	84	2.5
79.77	5.33	81	1	82.16	4.63	84	3
79.79	3.53	81	1.5	82.2	5.7	84	3.5
80	1	81	2	82.22	2.62	84	4
80	1.2	81	2.4	82.27	5.33	84	4.5
80	1.25	81	2.5	82.28	1.78	84	5
80	1.3	81	3	82.34	2.62	84	5.3
80	1.5	81	3.5	82.5	2.2	84	5.4
80	1.75	81	4	82.5	2.4	84	5.7
80	2	81	4.5	82.5	3.2	84	6
80	2.4	81	5	82.5	3.55	84	6.5
80	2.5	81	5.1	82.5	4	84	7
80	2.8	81	5.34	82.5	5.3	84	8

d1	d2										
84	9	85	13	86.5	4.75	88	3.75	89	7.5	90	12
84	10	85	14	86.5	5	88	3.8	89	8	90	14
84	12	85	15	86.69	5.33	88	4	89	11	90	15
84.1	3.5	85	16	86.7	3	88	4.5	89	12	90	16
84.1	5.7	85.09	5.33	86.7	3.5	88	5	89	13	90	20
84.2	3	85.09	6.99	86.9	3.6	88	5.3	89.1	5.7	90	25
84.2	5.7	85.32	3.53	87	1.5	88	5.5	89.1	5.8	90.3	4
84.3	2.6	85.34	1.78	87	2	88	5.7	89.2	3	90.35	1.78
84.3	5.7	85.4	3	87	2.5	88	6	89.2	5.7	90.47	3.18
84.3	6.4	85.4	7	87	2.6	88	7.5	89.3	5.7	90.49	5.33
84.4	3.1	85.5	2.4	87	3	88	8	89.4	3.1	90.5	1.5
84.4	4	85.5	2.5	87	3.5	88	10	89.4	5.3	90.7	3.6
84.5	2	85.5	3.2	87	4	88	12	89.41	3.18	90.77	4
84.5	3	85.5	3.5	87	4.4	88	15	89.5	2.5	91	1.5
84.5	3.5	85.5	4.3	87	4.5	88	20	89.5	3	91	2
84.5	4.5	85.5	5.7	87	5	88	21	89.5	3.5	91	2.5
84.5	5	85.5	6	87	5.33	88.1	3.6	89.6	3.15	91	2.65
84.5	9.45	85.55	3.18	87	5.89	88.24	2.38	89.6	5.7	91	3
84.52	2.62	85.6	3.2	87	6	88.26	6.98	89.69	5.33	91	3.5
84.6	3	85.62	3.53	87	7	88.27	5.33	90	1	91	4
84.6	5.7	85.7	4.76	87	8	88.27	6.99	90	1.5	91	5
84.68	2.62	85.8	1.25	87	8.5	88.3	2.62	90	2	91	7
84.7	1.2	85.9	5.33	87	10	88.3	7	90	2.2	91	8
85	1	86	1.25	87	12	88.49	5.57	90	2.5	91.2	5.7
85	1.5	86	1.5	87	15	88.5	2.5	90	2.8	91.44	5.33
85	1.78	86	1.6	87	18	88.5	3.53	90	2.9	91.5	3
85	1.8	86	1.7	87	20	88.5	5.7	90	3	91.5	3.2
85	2	86	2	87.1	2.4	88.57	2.62	90	3.1	91.5	7
85	2.4	86	2.4	87.2	2.5	88.57	3.15	90	3.5	91.6	3.6
85	2.5	86	2.5	87.2	5.7	88.59	5.32	90	3.55	91.67	3.53
85	2.62	86	2.7	87.2	8	88.62	1.78	90	3.9	91.67	3.8
85	3	86	3	87.3	6.99	88.8	3	90	4	91.7	1.78
85	3.1	86	3.5	87.43	7	88.86	6.99	90	4.2	92	1.5
85	3.5	86	3.98	87.45	6.98	88.9	2.4	90	4.5	92	1.73
85	3.55	86	4	87.5	1.5	88.9	2.5	90	4.6	92	2
85	3.75	86	4.1	87.5	1.7	88.9	3.5	90	4.8	92	2.5
85	4	86	4.5	87.5	3.5	88.9	3.96	90	5	92	3
85	4.5	86	5	87.5	3.55	88.9	5.84	90	5.1	92	3.2
85	4.9	86	5.4	87.5	3.6	88.9	6.35	90	5.25	92	3.5
85	5	86	5.5	87.5	5.3	89	1.5	90	5.3	92	3.53
85	5.25	86	6	87.5	6.2	89	1.78	90	5.5	92	4
85	5.3	86	6.4	87.6	3.5	89	1.9	90	5.7	92	4.5
85	5.5	86	6.5	87.63	4.19	89	2	90	5.72	92	5
85	5.8	86	7	87.9	5.3	89	2.3	90	5.8	92	5.3
85	6	86	7.5	88	1.5	89	2.4	90	6	92	5.5
85	6.3	86	8	88	2	89	2.5	90	6.3	92	6
85	6.5	86	10	88	2.2	89	3	90	6.5	92	7
85	6.99	86	12	88	2.5	89	3.5	90	7	92	7.5
85	7	86	12.5	88	2.62	89	4	90	7.5	92	8
85	7.5	86.2	5.7	88	2.8	89	4.5	90	8	92	8.5
85	8	86.3	2.6	88	3	89	5	90	8.3	92	9
85	9	86.36	2.62	88	3.2	89	5.5	90	8.5	92	9.5
85	10	86.5	2	88	3.5	89	5.7	90	9	92	10
85	12	86.5	2.5	88	3.6	89	6	90	10	92	13
85	12.5	86.5	3	88	3.7	89	7	90	11	92	14

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
92.2	5.7	94.2	5.5	96	2.5	97.8	3.53
92.33	1.78	94.2	5.7	96	3	97.8	5.33
92.38	3.53	94.3	5.7	96	3.5	98	1
92.5	2	94.4	3.1	96	4	98	1.5
92.5	2.2	94.5	2	96	4.3	98	2
92.5	3.5	94.5	2.5	96	4.5	98	2.2
92.5	3.55	94.5	3	96	5	98	2.5
92.5	5.3	94.6	5.3	96	5.33	98	3
92.62	5.33	94.6	5.7	96	6	98	3.5
92.71	2.62	94.62	5.33	96	7	98	4
92.76	2.62	94.84	3.53	96	8	98	4.2
92.92	2.62	94.84	4.75	96	10	98	4.5
92.99	2.03	94.93	2.62	96	14	98	5
93	1.5	94.97	1.78	96	15	98	5.2
93	2	95	1	96.1	5.7	98	5.5
93	2.5	95	1.5	96.11	2.62	98	6
93	2.8	95	1.78	96.3	3.6	98	6.8
93	3	95	1.8	96.5	2.62	98	7
93	3.5	95	2	96.5	4	98	7.5
93	4	95	2.2	96.5	6.5	98	8
93	5	95	2.3	96.6	1.6	98	9
93	5.33	95	2.5	96.6	10	98	10
93	6	95	2.65	96.7	7.3	98.02	3.53
93	6.5	95	3	96.76	1.86	98.05	1.78
93	12	95	3.5	97	1	98.42	4.77
93	12.7	95	3.55	97	1.5	98.5	1.5
93	20	95	4	97	1.6	98.5	3.5
93.2	3.6	95	4.5	97	2	98.5	5.3
93.2	9.5	95	5	97	2.5	99	1.5
93.34	12.7	95	5.3	97	2.75	99	2
93.5	2	95	5.5	97	3	99	2.5
93.5	4.5	95	5.6	97	3.5	99	3
93.73	1.85	95	5.7	97	3.8	99	3.2
93.75	2	95	6	97	4	99	3.5
94	1	95	6.3	97	4.5	99	4
94	1.5	95	6.5	97	5	99	5
94	2	95	7	97	5.2	99	5.5
94	2.3	95	7.5	97	5.5	99	5.7
94	2.5	95	8	97	6	99	6
94	2.62	95	10	97	7	99	6.5
94	2.95	95	11	97	8	99	7
94	3	95	11.2	97	9	99	7.7
94	3.5	95	12	97	16	99	8
94	4	95	15	97.2	5.7	99	9
94	5	95	20	97.29	5.33	99.1	2.4
94	5.5	95.09	5.34	97.4	5.3	99.1	5.7
94	5.7	95.2	2.4	97.5	3	99.2	5.7
94	6	95.25	4.76	97.5	3.55	99.3	3
94	7	95.5	3	97.5	4.5	99.3	5.7
94	8	95.5	4	97.5	5	99.4	3.1
94	9	95.5	4.32	97.5	5.3	99.4	4.1
94	9.5	95.5	6	97.5	5.5	99.4	6.3
94	10.5	96	1.5	97.76	2.62	99.5	1.8
94.1	5.7	96	1.7	97.79	6.33	99.5	3
94.1	6	96	2	97.79	6.35	99.5	4.5

d1	d2										
99.6	5.7	101	5.5	103	4	104.5	6	106	3.5	108	4.5
100	1	101	6	103	4.5	104.6	5.7	106	3.55	108	4.75
100	1.4	101	7	103	5	104.77	4.76	106	4	108	5
100	1.5	101	12	103	5.2	104.78	9.53	106	4.5	108	5.2
100	1.6	101.2	3.53	103	5.3	104.8	5.33	106	5	108	5.3
100	2	101.2	4.2	103	6	105	1.5	106	5.3	108	5.5
100	2.2	101.2	5.7	103	7	105	1.78	106	5.5	108	6
100	2.5	101.27	2.62	103	8	105	2	106	6	108	7
100	2.75	101.3	7.2	103	10	105	2.5	106	6.3	108	8
100	3	101.34	1.78	103	12	105	2.75	106	6.5	108	9
100	3.4	101.4	4.8	103	14	105	3	106	6.8	108	9.5
100	3.5	101.5	2	103.5	1.5	105	3.1	106	7	108	10
100	3.55	101.5	3	103.5	3	105	3.5	106	8	108	11
100	4	101.5	3.5	103.5	3.2	105	4	106	8.5	108	15
100	4.5	101.6	3.2	103.5	4	105	4.3	106	10	108	16
100	4.7	101.6	5.7	103.5	4.2	105	4.4	106	12	108	18
100	5	101.6	6.35	103.5	4.5	105	4.5	106.3	3.34	108.3	3.8
100	5.2	101.6	6.99	103.51	3.18	105	4.6	106.5	2.4	108.5	2
100	5.3	101.6	9.5	104	1.78	105	5	106.5	4.75	108.5	11.5
100	5.33	102	1.5	104	2.5	105	5.3	106.5	4.8	108.8	6
100	5.5	102	2	104	2.62	105	5.5	107	1.5	109	2
100	5.7	102	2.5	104	3	105	5.8	107	2	109	2.5
100	6	102	3	104	3.5	105	5.9	107	2.5	109	3
100	6.3	102	3.5	104	4	105	6	107	2.7	109	3.4
100	6.5	102	4	104	4.5	105	6.4	107	3	109	3.5
100	7	102	4.5	104	5	105	6.5	107	3.5	109	3.55
100	7.5	102	4.75	104	5.5	105	7	107	4	109	4
100	8	102	5	104	5.7	105	7.25	107	4.3	109	4.5
100	9.5	102	5.5	104	6	105	7.5	107	4.5	109	5
100	10	102	5.7	104	6.13	105	8	107	5	109	5.3
100	12	102	6	104	7	105	8.4	107	5.5	109	5.5
100	12.5	102	6.5	104	8	105	8.5	107	6	109	5.7
100	13.5	102	7	104	9	105	9.5	107	7	109	5.8
100	15	102	8	104	10.5	105	10	107	7.5	109	6
100	16	102	9.5	104	13	105	10.3	107	8	109	7
100	20	102	12	104	14	105	12	107	9	109	8.5
100.2	4.35	102	14	104	16	105	14	107	10	109.1	5.7
100.5	2.4	102.2	3.53	104.1	3.18	105	15	107	14	109.14	3.53
100.5	3.5	102.3	9	104.1	5.7	105	17.5	107	15	109.2	5.7
100.5	4.5	102.3	9.2	104.14	5.33	105.1	2	107.2	5.33	109.3	5.7
100.5	5.3	102.5	1.6	104.14	6.99	105.1	4.5	107.32	5.33	109.4	3.1
100.5	7	102.5	2.4	104.2	3	105.2	5.7	107.32	6.99	109.5	3
100.9	7.6	102.5	2.5	104.2	5.7	105.28	5.33	107.5	3.4	109.5	4.75
100.95	1.6	102.5	5.5	104.3	5.7	105.5	1.5	107.54	3.53	109.5	5
100.97	5.33	102.5	6.99	104.3	6	105.5	2.4	107.54	4	109.5	8.4
100.97	6.99	102.6	4.5	104.37	3.53	105.5	3	107.6	3.6	109.52	3.53
101	2	102.8	3.3	104.37	3.8	105.5	4	107.63	2.62	109.54	5.33
101	2.5	102.8	9.5	104.4	1.78	105.8	5.4	107.7	1.78	109.6	5.7
101	3	103	1.5	104.4	3.1	106	1	108	2	109.75	4.8
101	3.5	103	2	104.4	5.3	106	1.8	108	2.5	109.78	4.83
101	4	103	2.5	104.5	2	106	2	108	3	109.78	4.85
101	4.3	103	3	104.5	2.6	106	2.4	108	3.2	110	1.5
101	4.5	103	3.2	104.5	3	106	2.5	108	3.5	110	1.6
101	5	103	3.5	104.5	4	106	2.62	108	4	110	1.78
101	5.33	103	3.55	104.5	5	106	3	108	4.2	110	2

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
110	2.25	111.5	2.5	114	3	115	7
110	2.5	111.5	2.6	114	3.5	115	7.5
110	3	111.5	3	114	4	115	8
110	3.2	111.5	5	114	4.6	115	8.4
110	3.5	111.6	5.7	114	5	115	8.5
110	4	111.8	3.53	114	5.3	115	9
110	4.5	112	1.5	114	5.5	115	9.1
110	4.6	112	2	114	5.7	115	10
110	4.75	112	2.5	114	6	115	14
110	5	112	3	114	6.5	115	15
110	5.3	112	3.5	114	7	115	20
110	5.5	112	3.55	114	8	115.7	5.7
110	5.6	112	4	114	9	115.75	3
110	5.7	112	4.5	114	10	116	1.5
110	5.8	112	4.6	114	10.5	116	1.75
110	6	112	5	114	14	116	2
110	6.5	112	5.3	114	17	116	2.5
110	7	112	6	114.19	3.53	116	3
110	7.5	112	6.3	114.19	5.43	116	3.5
110	7.7	112	7	114.2	5.7	116	4
110	8	112	8	114.3	3.15	116	4.5
110	8.5	112	11	114.3	4.2	116	5
110	9	112	14	114.3	4.7	116	5.3
110	9.5	112.1	5.3	114.3	5.7	116	5.5
110	10	112.3	5.7	114.3	15	116	6
110	11	112.5	1.78	114.4	3.1	116	7
110	12	112.5	5	114.4	3.8	116	7.5
110	14	112.5	5.5	114.5	2.5	116	10
110	15	113	1.5	114.5	3	116	15
110	20	113	2	114.5	3.3	116.4	6.99
110.3	2.4	113	2.5	114.5	4	116.5	2
110.4	5.8	113	3	114.5	6	116.5	4.1
110.49	3.53	113	3.5	114.5	12	116.5	4.5
110.49	5.33	113	3.53	114.6	5.7	116.7	4.4
110.49	6.99	113	4	114.7	6.99	116.84	5.33
110.5	2.4	113	5	114.81	5.34	116.84	6.99
110.5	3	113	5.5	114.9	5.43	117	1.5
110.5	6	113	6	115	1.5	117	2
110.72	3.53	113.41	6.35	115	2	117	2.5
110.74	1.78	113.5	2	115	2.5	117	2.75
110.8	4	113.5	5.33	115	3	117	3
111	2	113.5	6.8	115	3.3	117	3.5
111	2.5	113.66	8.5	115	3.5	117	4
111	3	113.67	5.33	115	3.55	117	4.2
111	3.3	113.67	6.99	115	3.6	117	4.4
111	3.5	113.7	5.5	115	4	117	5
111	4	113.7	7	115	4.1	117	5.3
111	5	113.8	8.4	115	4.5	117	6
111	6	113.9	3.53	115	5	117	6.5
111	7.7	113.98	2.62	115	5.07	117	7
111	9	114	1.3	115	5.1	117	8
111.1	1.6	114	1.6	115	5.3	117	9
111.13	4.76	114	1.78	115	5.5	117	19
111.2	5.7	114	2	115	5.6	117.06	3.81
111.5	2.4	114	2.5	115	6	117.07	3.53

d1	d2										
117.1	1.78	119.4	3.1	120.65	9.53	123	3.5	124.5	5	126	14
117.2	5.7	119.5	2	120.7	5.33	123	4	124.6	3.5	126	18
117.48	3.18	119.5	3	120.82	2.62	123	4.5	124.6	5.7	126.37	5.33
117.48	5.33	119.5	3.3	121	1.4	123	5	124.6	6.99	126.37	6.99
117.5	2.5	119.5	5.5	121	1.5	123	6	124.8	2.5	126.5	3
117.5	3.2	119.5	7	121	1.6	123	6.3	124.8	9	126.5	3.2
117.5	3.53	119.6	5.7	121	2.5	123	6.5	124.82	1.78	126.57	5.33
117.5	4	119.8	1.5	121	3	123	7	125	1.5	126.6	3.53
117.5	5	119.8	3	121	3.5	123	7.5	125	1.8	126.67	2.62
117.5	5.33	119.85	4.45	121	4	123	8	125	2	126.76	1.78
117.5	5.7	119.89	3.53	121	5	123	9	125	2.4	126.9	6.4
117.8	6.35	120	1.5	121.4	7.8	123	12	125	2.5	127	1.5
118	2	120	1.6	121.5	1.2	123	13	125	2.65	127	2
118	2.5	120	2	121.5	2	123.03	3.68	125	3	127	2.5
118	2.62	120	2.1	121.5	2.2	123.19	4.85	125	3.5	127	3
118	2.65	120	2.2	121.5	3	123.2	5.33	125	3.55	127	3.5
118	3	120	2.5	121.5	4	123.2	6.99	125	4	127	4
118	3.25	120	2.7	121.5	5.7	123.26	3.68	125	4.2	127	4.5
118	3.5	120	3	122	1	123.42	3.53	125	4.5	127	5
118	3.55	120	3.2	122	1.25	123.44	1.78	125	5	127	5.33
118	4	120	3.26	122	1.3	123.5	3	125	5.3	127	5.5
118	4.5	120	3.5	122	1.8	123.5	3.5	125	6	127	6.75
118	5	120	3.6	122	1.9	123.5	4	125	6.5	127	8
118	5.3	120	3.7	122	2	123.75	4.25	125	7	127	10
118	6	120	4	122	2.5	123.8	3.2	125	7.5	127.5	2
118	6.3	120	4.5	122	3	123.8	4.76	125	8	127.5	3
118	7	120	5	122	3.5	123.8	5.33	125	8.5	127.5	4
118	8	120	5.6	122	3.55	124	2.5	125	9.1	127.5	5.7
118	9	120	5.8	122	4	124	3	125	10	127.5	6.8
118	10	120	6	122	4.2	124	3.2	125	12	127.7	1.5
118	13	120	6.5	122	4.5	124	3.5	125	12.5	127.7	4
118.4	4	120	7	122	4.7	124	4	125	15	128	1.5
118.47	9.27	120	8	122	5	124	4.15	125.1	6.6	128	2
118.5	3	120	8.5	122	5.3	124	4.5	125.2	5.7	128	2.5
118.5	5	120	9.1	122	5.34	124	5	125.5	5	128	2.6
118.5	6.5	120	10	122	5.5	124	5.4	126	2	128	3
118.65	4.45	120	11.5	122	6	124	5.7	126	2.2	128	3.5
118.72	2.62	120	12	122	7	124	6	126	2.4	128	3.55
118.8	8.4	120	14	122	8	124	6.5	126	2.5	128	4
119	2	120	15	122	8.5	124	7	126	3	128	4.5
119	2.5	120	16	122	9	124	8	126	3.2	128	5
119	3	120	25	122	9.5	124	8.5	126	3.5	128	5.3
119	3.5	120	30	122	10	124	9	126	4	128	6
119	4	120.02	5.16	122	12	124	13	126	4.5	128	6.6
119	5	120.02	5.33	122	18	124	18	126	5	128	7
119	5.2	120.02	6.99	122	20	124.2	1.78	126	5.33	128	7.5
119	5.7	120.25	3.53	122.42	3.53	124.2	2.62	126	5.5	128	8.5
119	6	120.32	3.15	122.5	2	124.2	5.7	126	5.7	128	9
119	6.2	120.33	2.62	122.5	2.5	124.2	6.99	126	6	128	10
119	7	120.34	3.53	122.5	4	124.3	5.7	126	7	128	12
119	8	120.4	1.78	122.8	3.5	124.4	2.62	126	7.5	128.5	2.5
119	10	120.4	3.8	123	2	124.4	3.1	126	8	128.5	2.6
119.2	5.2	120.5	6.8	123	2.5	124.5	2	126	9	128.5	3.5
119.2	5.7	120.5	12	123	3	124.5	3	126	10	128.5	4
119.3	5.7	120.62	2.62	123	3.3	124.5	4	126	13	128.5	12

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
129	2	130	12	132.7	5.7	134.3	6
129	2.5	130	15	132.72	2.62	134.4	3.1
129	3	130	25	132.72	5.33	134.5	1.78
129	3.5	130.18	5.33	132.72	6.99	134.5	2
129	4	130.5	2.5	132.9	2.5	134.5	3
129	4.3	130.5	3	132.94	3.53	134.5	4
129	4.5	130.5	3.5	133	1.5	134.5	4.5
129	5	130.5	4	133	2	134.5	5
129	5.5	130.7	6	133	2.5	134.5	6.99
129	8	130.85	7	133	2.62	134.6	5.7
129	10	131	1.7	133	3	135	1.5
129	11	131	2.4	133	3.2	135	1.9
129.04	5.33	131	2.5	133	3.25	135	2
129.1	3.3	131	3	133	3.5	135	2.2
129.14	3.1	131	3.5	133	4	135	2.5
129.2	5.7	131	4	133	4.4	135	2.65
129.3	5.4	131	4.5	133	4.5	135	2.75
129.3	5.7	131	5	133	5	135	3
129.4	1.78	131	5.3	133	6	135	3.1
129.4	3.1	131	7	133	7	135	3.2
129.5	3	131	10	133	8	135	3.38
129.5	5	131.2	2.4	133	10	135	3.5
129.5	5.33	131.2	5.7	133	12	135	4
129.54	1.65	131.3	5.7	133	13	135	4.1
129.54	5.33	131.5	3.55	133	16	135	4.5
129.54	6.99	131.5	4	133.07	1.78	135	5
129.6	5.7	131.5	4.5	133.2	5.7	135	5.5
129.77	3.53	131.57	1.78	133.3	6.4	135	5.7
129.77	3.8	131.6	5.7	133.35	3.17	135	5.8
130	1.5	131.74	1.78	133.35	5.33	135	6
130	2	131.8	1.78	133.35	12.7	135	6.5
130	2.4	132	1.5	133.5	4	135	7
130	2.5	132	1.7	133.5	7	135	7.5
130	3	132	1.8	133.6	2.2	135	7.7
130	3.15	132	2	133.8	8.4	135	8
130	3.5	132	2.4	134	1.5	135	9
130	4	132	2.5	134	1.6	135	9.1
130	4.2	132	3	134	2	135	10
130	4.3	132	3.5	134	2.5	135	11
130	4.5	132	3.55	134	3	135	12
130	5	132	3.9	134	3.1	135	13
130	5.5	132	4	134	3.2	135	15
130	5.8	132	4.5	134	3.5	135	17
130	6	132	5	134	4	135	17.5
130	6.35	132	5.3	134	4.2	135	18
130	6.5	132	5.65	134	4.5	135.4	4.2
130	6.65	132	6	134	5	135.5	4
130	7	132	7	134	6	135.5	9.2
130	7.5	132	8	134	6.8	135.6	4.12
130	8	132	10	134	8	135.7	3.53
130	9	132.2	2.3	134	11	135.76	1.78
130	9.6	132.2	5.7	134.1	8.4	135.9	5.33
130	10	132.4	2.62	134.2	4	135.9	6.99
130	10.8	132.5	1.6	134.2	5.7	136	2.5
130	11	132.5	2.4	134.3	5.7	136	3


d1	d2										
136	3.5	139	3.5	140	10	143	4	145	8.6	148	4.5
136	3.55	139	4	140	11	143	5	145	10	148	5
136	4	139	4.5	140	12	143	5.7	145	15	148	5.5
136	4.25	139	5	140	15	143	6	145.29	1.78	148	6
136	5	139	6	140	16	143	6.35	145.41	3.3	148	7
136	5.3	139	7	140.37	3.53	143	6.5	145.42	5.16	148	8
136	6	139.07	1.78	140.5	4.5	143	8	145.42	5.33	148	10
136	7	139.07	5.33	140.64	5.34	143	10	145.42	6.99	148	12
136	8	139.07	6.99	141	2.4	143	12	145.42	7.92	148.2	5.7
136	10	139.2	2.4	141	2.5	143.4	3	145.45	6.55	148.46	1.78
136	12	139.2	2.8	141	3	143.5	1.6	145.5	6.35	148.5	2
136	13	139.2	5	141	3.5	143.5	1.78	145.5	6.5	148.5	4
136	17	139.2	5.7	141	4	144	2.5	145.65	3.53	148.5	5
136.12	3.53	139.2	6	141	4.5	144	3	145.72	2.62	148.5	7.5
136.5	4	139.3	2.4	141	5	144	3.5	145.77	1.78	148.5	8.4
136.5	4.5	139.3	3.53	141	6.25	144	3.7	146	2	148.59	5.33
136.5	6	139.3	5.7	141	7	144	3.8	146	2.5	148.6	5.33
136.53	5.33	139.38	2.62	141	9.8	144	4	146	3	148.6	6.99
137	2.5	139.4	3.1	141.5	2.5	144	4.5	146	3.5	148.82	3.53
137	2.62	139.5	3	141.5	3	144	5	146	4	149	2.5
137	3	139.5	4.5	141.5	7	144	5.25	146	4.5	149	3
137	3.4	139.6	5.7	141.5	10	144	5.5	146	4.57	149	3.5
137	3.5	139.7	4.75	141.5	12	144	6	146	5	149	4
137	4	139.7	5.33	142	2	144	6.5	146	5.5	149	5
137	4.5	139.7	6.99	142	2.5	144	8	146	6	149	6
137	4.7	139.7	7.92	142	3	144	10	146	7	149	6.5
137	5	139.7	15	142	3.5	144	10.7	146	8	149	7
137	6	140	1.5	142	4	144.02	1.78	146	12	149	8
137	6.5	140	1.78	142	5	144.1	8.4	146.05	5.33	149	12
137	7	140	2	142	5.33	144.2	3	146.07	4.7	149.1	8.4
137	8	140	2.3	142	6	144.2	5.7	146.1	3.2	149.2	4.76
137.37	2.62	140	2.4	142	6.3	144.27	4.06	146.3	5.7	149.2	5.7
137.5	2.5	140	2.5	142	6.5	144.3	5.7	146.5	4	149.2	6.2
137.5	3	140	2.65	142	7	144.4	3.1	147	1.78	149.23	5.33
137.8	20	140	3	142	7.5	144.5	3	147	2.5	149.3	5.7
138	2	140	3.15	142	8	144.5	3.7	147	3	149.5	2
138	2.1	140	3.2	142	10	144.5	4	147	3.5	149.5	3
138	2.5	140	3.5	142	12	144.6	5.7	147	4	149.5	8.4
138	3	140	3.55	142	18	144.7	3	147	4.33	149.5	9.5
138	3.5	140	3.75	142.11	1.78	145	1.5	147	5	149.6	5.7
138	4	140	3.8	142.24	5.33	145	2.5	147	6.5	150	1.2
138	4.4	140	4	142.24	6.99	145	3	147	8	150	2
138	4.5	140	4.3	142.47	3.53	145	3.5	147	14	150	2.38
138	5	140	4.5	142.5	3	145	3.55	147	15	150	2.5
138	5.3	140	5	142.5	5	145	4	147.3	3	150	2.62
138	6	140	5.3	142.7	5.7	145	4.2	147.5	3	150	3
138	6.5	140	5.5	142.8	5.8	145	5	147.5	4.5	150	3.1
138	7	140	5.8	142.88	5.33	145	5.25	147.55	2.62	150	3.5
138	8	140	6	143	1.78	145	5.3	148	1.78	150	3.55
138	10	140	6.3	143	2	145	5.5	148	2	150	4
138	16	140	6.35	143	2.5	145	6	148	2.5	150	4.5
138.5	6.55	140	7	143	3	145	6.5	148	3	150	5
138.94	1.78	140	7.5	143	3.5	145	7	148	3.5	150	5.3
139	2.5	140	8	143	3.7	145	7.5	148	3.75	150	5.4
139	3	140	8.6	143	3.97	145	8	148	4	150	5.5

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
150	5.8	152.2	5.5	155	4.5	158	2
150	6	152.5	1.5	155	5	158	2.5
150	6.35	152.5	2.5	155	5.3	158	3
150	6.5	152.5	7	155	5.33	158	3.5
150	6.7	152.62	2.62	155	5.5	158	4
150	7	153	2	155	5.7	158	4.5
150	7.5	153	2.5	155	6	158	5
150	8	153	3	155	6.75	158	6
150	9	153	3.5	155	7	158	6.5
150	10	153	4	155	7.5	158	6.7
150	11	153	4.5	155	8	158	6.9
150	12	153	5	155	9	158	7
150	15	153	6	155	9.5	158	8
150	20	153	10	155	10	158	12
150.88	3.53	153	14	155	15	158	16
151	2.6	153	15	155.5	6	158	18
151	3	153.5	1.6	155.5	7	158.12	2.62
151	3.5	153.5	3	155.6	5.33	158.12	5.33
151	4	153.5	5	155.6	6.99	158.12	6.99
151	5	153.5	6.8	156	2	158.35	3.53
151	7	153.52	6.99	156	2.5	158.4	3.2
151	8	154	3	156	3	158.41	2.62
151.4	4	154	3.5	156	3.5	158.44	3.53
151.5	2.5	154	4	156	4	158.59	5.33
151.5	8.5	154	5	156	4.8	158.75	6.35
151.59	1.78	154	6	156	5	158.75	12.7
151.64	1.78	154	7	156	5.5	158.8	6.4
151.69	3.2	154	8	156	6	158.88	2.62
151.77	3	154	10	156	6.5	159	2.5
151.77	5.33	154	12	156	7	159	3
151.77	6.99	154.1	8.4	156	8	159	3.5
151.78	1	154.2	5.33	156	10	159	4
151.8	4	154.2	5.7	156	12	159	5
151.99	2.4	154.3	5.7	156	16	159	6
151.99	3.53	154.3	6.4	156.3	5.7	159	6.3
152	1.5	154.4	3.1	156.5	2.5	159	6.8
152	1.6	154.4	4	156.5	5.7	159	7
152	2	154.5	3	156.5	7	159	11
152	2.5	154.5	4	157	1.5	159.1	8.4
152	2.6	154.5	5	157	2	159.2	5.7
152	3	154.5	8.4	157	3	159.2	7
152	3.5	154.5	10	157	3.5	159.3	2.4
152	4	154.81	1.78	157	4	159.3	5.7
152	5	155	1.5	157	4.5	159.5	2.5
152	5.1	155	1.7	157	5	159.5	3
152	5.5	155	2	157	6	159.5	6.99
152	6	155	2.5	157	6.5	159.5	8.4
152	7	155	2.6	157	6.55	159.5	9.5
152	7.5	155	3	157	7.5	159.7	3
152	8	155	3.1	157	8	160	1.5
152	8.5	155	3.2	157	8.3	160	2
152	10	155	3.5	157	15	160	2.3
152	12	155	3.55	157	20	160	2.4
152.07	2.62	155	4	157.5	7	160	2.5
152.09	5.12	155	4.2	158	1.78	160	3

d1	d2										
160	3.5	162.5	2.5	164.78	2.62	167.4	3.3	170	5.5	172.5	3.5
160	3.55	162.5	3.5	165	1.5	167.5	2.62	170	5.8	173	2
160	4	162.5	4	165	2	167.5	3.5	170	6	173	2.4
160	4.2	162.6	7	165	2.4	167.5	5.7	170	6.4	173	2.5
160	4.5	162.76	2.38	165	2.5	167.5	8	170	6.5	173	3
160	4.75	163	1.5	165	3	167.51	1.78	170	7	173	3.1
160	5	163	1.78	165	3.5	167.7	5.33	170	7.5	173	3.5
160	5.25	163	2	165	3.55	167.8	2.62	170	8	173	3.6
160	5.3	163	3	165	4	168	2	170	8.5	173	4
160	5.5	163	3.5	165	4.5	168	3	170	9	173	5
160	5.8	163	4	165	5	168	3.5	170	9.5	173	5.33
160	6	163	4.5	165	5.3	168	4	170	10	173	8
160	7	163	5	165	5.5	168	4.5	170	12	173	9
160	7.2	163	6	165	6	168	5	170	12.5	173	10
160	7.5	163	6.35	165	6.2	168	6	170	13	173.37	5.7
160	8	163	7	165	6.5	168	7	170	14	173.5	3
160	8.5	163	9	165	7	168	8	170	15	173.5	5
160	9	163.1	2.5	165	7.5	168	10	170.3	4.7	173.87	1.78
160	10	163.3	2.5	165	8	168	11	170.39	3.53	174	2.5
160	12	163.6	2.2	165	10	168	12	170.4	4	174	2.62
160	14	163.7	8.6	165	12	168	16	170.69	1.78	174	3
160	14.3	163.8	7	165	14	168.3	5.7	170.82	5.33	174	3.2
160	15	164	2	165	16	168.3	6.99	170.82	5.83	174	3.3
160	16	164	3	165	20	168.5	3	170.82	6.99	174	3.5
160	20	164	3.5	165.4	5.33	168.5	6.25	171	2.7	174	4
160.3	2.5	164	4	165.5	4	169	2.4	171	3	174	5
161	2.4	164	4.1	165.5	5.5	169	2.5	171	3.5	174	5.25
161	3	164	4.7	166	1.78	169	3	171	3.53	174	5.33
161	3.5	164	5	166	2.5	169	3.5	171	4	174	6
161	4	164	6	166	3	169	4	171	5	174.1	8.4
161	5	164	7	166	3.5	169	5	171	7	174.2	3.6
161	10	164	7.2	166	4	169	6	171	9	174.2	5.7
161.1	10	164	8	166	5	169	15	171	10	174.3	5.33
161.16	1.78	164	8.3	166	6	169.1	8.4	171	11	174.3	5.7
161.3	5.33	164	8.4	166	6.2	169.2	5.7	171	12	174.4	3.2
161.3	10	164	8.5	166	10	169.2	6.2	171.05	3.53	174.5	3
161.6	2.4	164	10	166	13	169.2	7	171.13	2.62	174.5	8.4
161.9	6.99	164	12	166	15	169.3	5.7	171.4	3.2	174.6	6.99
162	2.3	164	12.7	166	19	169.5	3	171.45	6.35	175	2
162	2.5	164.1	8.4	166.1	2.5	169.5	8.4	172	1.78	175	2.4
162	3	164.2	5.7	166.2	14	170	1.78	172	2	175	2.5
162	3.15	164.2	6.99	166.2	20	170	2	172	2.5	175	2.62
162	3.5	164.3	3	166.7	6.99	170	2.4	172	3	175	2.7
162	3.53	164.3	5.7	166.75	2	170	2.48	172	3.5	175	3
162	4	164.34	1.78	166.8	5.3	170	2.5	172	4	175	3.5
162	4.5	164.47	5.33	167	2.5	170	2.62	172	4.2	175	3.55
162	5	164.47	6.99	167	3	170	3	172	4.5	175	4
162	6	164.5	2	167	3.5	170	3.1	172	4.8	175	4.5
162	7	164.5	3	167	4	170	3.2	172	5	175	5
162	8	164.5	3.53	167	5	170	3.5	172	5.5	175	5.2
162	10	164.5	7	167	6.5	170	3.55	172	6	175	5.3
162	12	164.5	8.4	167	7	170	4	172	6.3	175	5.5
162.1	5.2	164.5	13	167	8	170	4.5	172	7	175	6
162.3	2.5	164.67	5.33	167	10	170	5	172	8	175	7
162.3	6.35	164.7	3.53	167.28	8	170	5.3	172.5	2.5	175	7.5

Dichtomatik dimensions

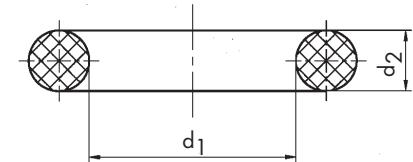

d1	d2	d1	d2	d1	d2	d1	d2
175	8	178	10	181	4	184.15	6.35
175	10	178	12	181	5	184.2	5.7
175	12	178	15	181	6.99	184.3	5.7
175	13	178	20	181	7	184.5	3
175	15	179	2.5	181.4	4.3	184.5	8.4
175.13	5.33	179	3	181.48	5.33	185	1.5
175.3	2.4	179	3.2	181.5	2.5	185	2
175.5	3	179	3.5	181.5	16	185	2.5
175.6	14	179	4	181.8	2.4	185	2.62
175.6	20	179	5	182	1.78	185	3
176	2.4	179	5.5	182	2	185	3.1
176	2.5	179	8	182	3	185	3.2
176	2.7	179	10	182	3.5	185	3.25
176	3	179	12	182	4	185	3.5
176	3.5	179.1	8.4	182	5	185	3.55
176	3.6	179.2	5.7	182	6	185	4
176	4	179.3	5.7	182	7	185	4.2
176	5	179.4	3.1	182	8	185	4.5
176	6	179.5	2	182	8.3	185	5
176	7	179.5	3	182.3	7	185	5.3
176.2	7	179.5	5	182.5	4	185	6
176.26	2.38	179.5	8.4	183	3	185	6.5
176.8	3.53	180	1.5	183	3.5	185	7
176.8	3.6	180	2	183	4	185	7.5
177	1.5	180	3	183	5	185	8
177	1.78	180	3.1	183	6	185	8.5
177	2	180	3.5	183	7	185	9
177	2.62	180	3.55	183	9	185	10
177	3	180	4	183	10	185	15
177	3.5	180	4.2	183.33	2.62	185.34	3.5
177	4	180	4.5	183.5	3	185.4	5.33
177	4.4	180	4.76	183.52	5.33	185.5	8.5
177	5	180	5	183.52	6.99	186	3
177	7	180	5.3	183.74	5.33	186	3.5
177.17	5.33	180	5.4	183.75	3.53	186	4
177.17	6.99	180	5.5	183.83	2.62	186	4.5
177.4	3.53	180	5.7	184	1.5	186	5
177.4	5	180	5.8	184	1.78	186	6
177.4	5.5	180	6	184	2	186	7
177.47	2.62	180	7	184	2.5	186	8
177.5	4.2	180	7.5	184	3	186	9.5
177.5	10	180	8	184	3.5	186.5	3.53
177.5	12	180	9	184	4	186.5	8.5
177.8	6.35	180	10	184	5	187	3
177.8	6.6	180	10.2	184	5.7	187	3.5
177.9	8	180	14	184	6	187	3.53
178	2	180	15	184	6.4	187	4
178	3	180	16	184	6.5	187	5
178	3.5	180	17	184	7	187	5.33
178	4	180	20	184	8	187	7
178	4.5	180.34	1.78	184	8.4	187.3	6.99
178	5	180.37	2.39	184	10	187.5	4
178	6	181	2	184	12.7	187.5	6
178	7	181	3	184	15	187.5	15
178	8	181	3.5	184.1	8.4	187.62	2.62

d1	d2										
187.7	1.7	190	6	193.5	5	196.22	6.99	200	5.3	204	2.5
187.74	3.53	190	6.3	193.5	5.33	196.22	8	200	5.5	204	3
188	1.5	190	6.5	193.7	6.99	196.44	3.53	200	5.6	204	3.5
188	2	190	7	194	2	196.44	6.35	200	6	204	4
188	3	190	7.5	194	2.2	196.53	2.62	200	6.3	204	4.5
188	3.5	190	8	194	2.5	196.9	3.2	200	6.5	204	5
188	4	190	8.5	194	3	197	3	200	7	204	6
188	5	190	9	194	3.5	197	3.5	200	8	204	7
188	6	190	10	194	4	197	4	200	8.35	204	8
188	6.5	190	12	194	5	197	5	200	8.6	204	8.4
188	7	190	13	194	5.33	197	8	200	10	204	15
188	8	190	14	194	6.1	197.15	3.53	200	10.2	204.1	8.4
188	10	190	15	194	7	198	3	200	11	204.2	5.2
188	12	190	20	194.1	8	198	3.5	200	12	204.2	5.7
188	15	190	25	194.1	8.4	198	3.8	200	15	204.4	14
188.1	2.5	190.1	3.53	194.2	5.7	198	4	200.5	8.4	204.5	3
188.5	9	190.18	2.62	194.3	3.1	198	5	200.7	6.99	204.5	8.4
189	2.6	190.5	3.17	194.3	5.7	198	6	201	3	204.7	3.5
189	3	191	3	194.44	2.53	198	6.5	201	3.5	205	1.5
189	3.5	191	3.5	194.5	2	198	7	201	4	205	2
189	4	191	4	194.5	3	198	7.5	201	5	205	2.5
189	4.5	191	5	194.5	8.4	198	8	201	6	205	3
189	5	191	5.5	194.7	5.3	198	9.5	201	8	205	3.5
189	6	191	6	195	2	198	10	201	9	205	3.6
189	8.4	191	7	195	2.5	198.5	3	201	10	205	4
189.1	8.4	191	7.5	195	3	198.7	10	201	11	205	4.5
189.2	5.7	191	8	195	3.5	199	3	201	12	205	5
189.3	5.33	191	14	195	3.55	199	3.5	202	2	205	5.33
189.3	5.5	191.1	6	195	3.75	199	4	202	3	205	5.5
189.3	5.7	191.2	6	195	4	199	5	202	3.5	205	6
189.5	2.5	192	2	195	5	199	7	202	3.6	205	7
189.5	3	192	2.5	195	5.3	199	11	202	4	205	7.5
189.5	4.5	192	3	195	5.5	199.1	8.4	202	5	205	8
189.5	8.4	192	3.5	195	5.9	199.2	5.7	202	5.5	205	9
189.6	5	192	4	195	6	199.2	7	202	6	205	11
189.8	2.5	192	4.5	195	7	199.3	3	202	7	205	15
189.86	7.06	192	5	195	7.5	199.3	5.7	202	8	205	20
189.87	5.33	192	6	195	8	199.5	3	202	12.5	205.3	6
189.87	6.99	192	6.1	195	8.6	199.5	8.4	202	12.7	205.87	11.1
190	2	192	7	195	9	199.8	6.99	202	18	206	3
190	2.5	192	8	195	10	200	1.5	202.57	5.33	206	3.5
190	2.6	192	14	195	15	200	1.6	202.57	6.99	206	4
190	2.65	192.22	6.99	195	16	200	1.78	202.79	3.53	206	5
190	2.7	193	1.5	195.5	5	200	2	202.87	2.62	206	5.3
190	3	193	2	196	3	200	2.5	203	3	206	5.7
190	3.1	193	2.62	196	3.5	200	2.62	203	3.5	206	6.99
190	3.2	193	3	196	4	200	2.8	203	4	206	7
190	3.5	193	3.5	196	4.5	200	3	203	5	206	8
190	3.55	193	4	196	5	200	3.2	203	6	206	10
190	4	193	5	196	6	200	3.5	203	6.35	206	12
190	4.5	193	6	196	7	200	3.55	203	7	206	14
190	5	193	6.5	196	8	200	4	203	12	206	15
190	5.3	193	7	196	10	200	4.2	203	15	206.5	3.53
190	5.5	193	16	196.22	1.78	200	4.5	203.5	4	207	3
190	5.8	193.5	4	196.22	5.33	200	5	203.5	6	207	3.5

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
207	4	210	6.5	214	5.5	217	5
207	4.5	210	7	214	6	217	5.2
207	5	210	7.5	214	7	217	6
207	5.7	210	8	214	12	217	7
207	7	210	8.6	214	20	217	7.5
207	9	210	9.5	214.1	8.4	217	8
207.5	5.5	210	10	214.3	5.7	217.5	2.5
207.5	7.5	210	11	214.5	3	218	2
208	3	210	12	214.5	7	218	2.2
208	3.3	210	13	214.5	8.4	218	3
208	3.5	210	20	215	2.2	218	3.5
208	3.6	211	3	215	2.5	218	3.55
208	4	211	3.5	215	3	218	3.6
208	4.5	211	4	215	3.5	218	4
208	5	211	5	215	4	218	4.2
208	5.5	211	5.7	215	4.5	218	4.5
208	6	211	12	215	5	218	5
208	6.65	211.5	5.7	215	5.3	218	5.3
208	7	212	1.78	215	5.5	218	5.33
208	8	212	2.5	215	5.7	218	5.8
208	8.5	212	2.75	215	6	218	6
208	9	212	3	215	6.4	218	6.35
208.5	3.5	212	3.15	215	6.5	218	7
208.5	8.4	212	3.5	215	7	218	7.2
208.92	5.33	212	3.55	215	7.5	218	8
208.92	6.99	212	4	215	8	218	10
209	1.78	212	5	215	10	218	12
209	3	212	5.3	215	13.5	218	19
209	3.5	212	5.7	215	20	218.19	3.53
209	4	212	6	215.17	2.62	218.4	4.18
209	5	212	6.3	215.27	2.62	218.5	4.5
209	5.3	212	6.5	215.27	5.33	218.5	5.8
209	7	212	7	215.27	6.99	218.7	2
209.1	8.4	212	8	215.49	1.78	219	3
209.14	3.53	212	10	215.49	3.53	219	3.4
209.2	5.7	212	12	215.58	2.62	219	3.5
209.23	2.62	212.4	7.3	215.65	1.59	219	4
209.3	5.7	212.5	4.5	215.67	5.33	219	4.5
209.5	3	212.5	15	215.9	1.78	219	5
209.5	6	212.6	2.18	215.9	6.35	219	8.4
209.5	8.4	213	2.4	216	2	219	16
209.55	6.35	213	3	216	3	219.1	8.4
210	1.5	213	3.5	216	3.5	219.2	5.7
210	1.8	213	4	216	4	219.3	5.7
210	2	213	5	216	5	219.49	3.53
210	2.5	213	5.4	216	6	219.5	3
210	3	213	8.5	216	6.99	219.5	5.33
210	3.1	213.91	6.35	216	8	219.5	8.4
210	3.5	214	2	216.5	2.5	220	2
210	4	214	2.5	216.65	1.9	220	3
210	4.5	214	3	216.65	2.7	220	3.5
210	5	214	3.5	217	1.78	220	4
210	5.5	214	4	217	3	220	4.5
210	6	214	4.5	217	3.5	220	5
210	6.4	214	5	217	4	220	5.33

d1	d2	d1	d2	d1	d2	d1	d2	d1	d2	d1	d2
220	5.7	223.3	5.7	227	4	230	6	234.3	5.7	238	3.5
220	6	223.9	8.2	227	4.5	230	7	234.32	5.33	238	3.6
220	6.5	224	3	227	5	230	7.5	234.32	6.99	238	4
220	6.8	224	3.5	227	6.5	230	8	234.5	3.3	238	5
220	7	224	3.55	227	7	230	8.72	234.5	5.33	238	5.5
220	7.5	224	3.8	227	9	230	9	234.5	8.4	238	5.7
220	8	224	4	227	10	230	10	234.54	3.53	238	6
220	8.2	224	5	227	20	230	11	234.63	2.62	238	6.3
220	8.4	224	5.3	227.97	5.33	230	15	234.82	2.62	238	7
220	8.6	224	6.3	227.97	6.99	230	18	235	2	238	8
220	10	224	7	228	2.5	230	20	235	2.3	238	10
220	10.11	224	8.4	228	2.6	230.84	3.5	235	2.5	238	12
220	14	224	10	228	3	231	3	235	3	239	3
220	15	224.2	2.5	228	3.5	231	3.5	235	3.5	239	3.5
220	16	224.3	3.1	228	4	231	4	235	4	239	4
220	20	224.5	6.4	228	5	231	5	235	5	239	5
221	3	224.5	8.4	228	5.7	231	8.4	235	5.33	239	6
221	3.5	225	2	228	6	231	15	235	5.5	239	6.5
221	4	225	2.5	228	7	231.78	11.11	235	6	239	7
221	4.5	225	2.8	228	7.5	232	2.5	235	6.99	239	7.5
221	5	225	3	228	8	232	3	235	7	239	8
221	6	225	3.5	228	10	232	3.5	235	8	239	10
221	8	225	3.53	228	20	232	4	235	8.5	239.1	8
221.5	5.7	225	4	228.19	3.53	232	5	235	9	239.1	8.4
221.62	5.33	225	4.5	228.28	2.62	232	6	235	10	239.1	10
221.62	6.99	225	5	228.47	7.66	232	7	235	12	239.2	5.7
221.84	3.53	225	5.2	228.6	6.35	232	8	235	15	239.3	5.7
221.93	2.62	225	5.7	228.8	2.5	232	9.5	235	15.9	239.3	6.5
222	1.78	225	6	229	3	232	9.52	236	3	239.3	7
222	2	225	6.3	229	3.5	232	17	236	3.5	239.5	2.75
222	2.5	225	6.5	229	4	232.2	3.6	236	3.55	239.5	3
222	2.62	225	7	229	5	232.55	3.53	236	4	239.5	7.5
222	3	225	8	229	6	233	3	236	5	239.5	8.4
222	3.2	225	10	229	9	233	3.2	236	5.3	240	2
222	3.5	225	12	229	12	233	3.5	236	6	240	2.5
222	4	225	15	229.1	8.4	233	4	236	7	240	3
222	5	225	20	229.2	5.7	233	5	236	12	240	3.5
222	5.5	225.2	5.7	229.3	5.7	233	6.5	236	14	240	3.53
222	6	225.5	5	229.5	3	233	7	236.55	4.33	240	4
222	6.5	226	2	229.5	5	233	8	237	3	240	4.2
222	6.53	226	2.5	229.5	8.4	234	2.5	237	3.15	240	4.5
222	7	226	3	230	1.78	234	3	237	3.5	240	4.8
222	12	226	3.5	230	2	234	3.5	237	3.53	240	5
222	12.7	226	4	230	2.5	234	4	237	4	240	5.7
222.4	5	226	5	230	3	234	5	237	4.2	240	6
222.5	3	226	6	230	3.5	234	6	237	5	240	6.5
222.5	6	226	8	230	3.55	234	6.5	237	5.5	240	7
222.94	2.6	226	10	230	3.8	234	8	237	6	240	7.5
223	2	226	11	230	4	234	8.4	237	7	240	8
223	3	226	12.7	230	4.5	234	8.5	237	7.5	240	8.4
223	3.5	227	2	230	5	234	10	237.2	2.2	240	8.6
223	4	227	2.5	230	5.3	234	15	237.5	6	240	9
223	5	227	3	230	5.33	234	16	238	2	240	10
223	6	227	3.3	230	5.5	234.1	8.4	238	3	240	11
223	12	227	3.5	230	5.7	234.22	5.33	238	3.2	240	12

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
240	14	245	2	248	11	251.14	6.99
240	15	245	2.5	248	12	251.3	7
240	20	245	2.62	248	13	252	2
240.1	3.9	245	3	248	15	252	2.5
240.67	5.33	245	3.5	248.2	7.2	252	3.5
240.67	6.99	245	4	248.5	7	252	3.53
240.89	3.53	245	5	249	3	252	3.6
240.98	2.62	245	5.34	249	3.5	252	4
241	2.5	245	6	249	4	252	5
241	3	245	6.5	249	5	252	5.7
241	3.5	245	6.7	249	6	252	6
241	4	245	7	249	7	252	10
241	5	245	7.5	249	8	252	15
241	5.3	245	8	249	8.4	252.8	3.6
241	6	245	10	249.1	8.4	253	3.5
241	6.4	245	11	249.1	8.5	253	4
241	7	245	12	249.2	5.7	253	5
242	3	245	15	249.3	5.7	253	5.34
242	3.5	245.2	5.7	249.5	3	253	7
242	4	246	2	249.5	8.4	253	8
242	4.5	246	2.5	250	2	253	12
242	5	246	3	250	2.5	253.3	6.99
242	6	246	3.5	250	2.62	253.37	5.33
242	6.5	246	4	250	3	253.4	7
242	8	246	5	250	3.5	253.5	3.53
242.02	5.33	246	6	250	3.53	253.57	5.33
242.5	8	246	8	250	3.55	253.57	6.99
242.5	10	246	9.5	250	4	253.59	1.78
242.6	6	246	15	250	4.5	253.59	3.53
243	2.93	247	2	250	4.6	253.77	7
243	3	247	3	250	5	253.8	14
243	3.3	247	3.5	250	5.3	253.97	6.99
243	3.5	247	4	250	5.33	254	3
243	4	247	5	250	5.5	254	3.5
243	4.5	247	5.33	250	5.7	254	4
243	5	247	6	250	6	254	5
243	7	247	6.99	250	6.3	254	6.35
243	8.5	247	7	250	6.5	254	8
243	17	247	8	250	7	254	10
243.5	1.78	247	10	250	8	254.1	1.9
243.5	6	247	12	250	9	254.3	5.7
244	2	247.02	5.33	250	10	254.5	3
244	3	247.24	3.53	250	12	254.5	4.52
244	3.5	247.33	2.62	250	15	254.5	8.4
244	4	248	2	250	18	254.7	8
244	5	248	3	250	20	255	2
244	5.5	248	3.2	250.5	9.5	255	2.5
244	6	248	3.5	250.9	9.1	255	3
244	7	248	4	251	3	255	3.5
244	8	248	5	251	3.5	255	3.53
244	9	248	6	251	4	255	4
244	11	248	7	251	5	255	4.2
244.1	8.4	248	8	251	7	255	5
244.3	5.7	248	9	251	8	255	5.7
244.5	8.4	248	10	251	12	255	6

d1	d2										
255	7	259.5	8.4	264	4.6	267	6	270	14	275	13
255	8	259.7	6.99	264	4.8	267	6.5	271	3	275	14
255	10	260	2	264	5	267	7	271	3.5	275.6	3.53
255	20	260	2.5	264	8	267	14	271	4	275.8	8
255.5	10.2	260	3	264	8.2	267.5	5.5	271	5	276	2
256	2	260	3.5	264	8.4	268	2.5	271	5.33	276	2.15
256	2.5	260	3.53	264	18	268	3	272	2.5	276	3
256	3.5	260	4	264.1	8.4	268	3.5	272	3	276	3.5
256	4	260	4.1	264.2	5.7	268	4	272	3.5	276	4
256	5	260	4.5	264.5	2.62	268	5	272	3.53	276	5
256	7.2	260	5	264.5	8.4	268	6.8	272	4	276	5.34
256	7.3	260	5.5	264.8	6.6	268	7	272	4.3	276	6
256	7.5	260	6	265	2	268	8	272	5	276	6.4
256	8	260	6.5	265	2.5	268	8.4	272	5.3	276	7
256	10	260	6.99	265	3	268	10	272	7	276	8
256	12	260	7	265	3.2	268.5	8.4	272.4	6.99	276	12
256.5	8.5	260	8	265	3.5	268.8	8.4	272.4	7	276.43	2.62
257	3	260	8.6	265	3.55	269	2	272.64	3.53	277	3
257	3.5	260	10	265	4	269	2.5	272.97	5.55	277	3.3
257	4	260	20	265	4.4	269	3	273	3.5	277	3.5
257	4.5	260.5	3.3	265	5	269	3.5	273	4	277	4
257	5	260.5	5.3	265	5.3	269	3.53	273	4.5	277	5
257.5	3	261	3.5	265	5.33	269	4	273	5	277	6
257.8	2.62	261	4	265	5.5	269	5	273	6	277	7.5
258	3	261	5	265	5.7	269	5.5	273	7	277.8	2.62
258	3.5	261	5.33	265	6	269	6	273	8	278	3
258	3.55	261.5	8	265	6.5	269	6.9	273	12	278	3.15
258	4	262	2	265	7	269	8	273	16	278	3.2
258	5	262	3.5	265	8	269	9	274	2	278	3.5
258	6	262	4	265	10	269.2	5.7	274	3	278	4
258	6.3	262	5	265.5	2.5	269.24	5.33	274	3.5	278	5
258	7	262	5.25	266	3.5	269.3	5.5	274	4	278	6
258	8	262	5.5	266	4	269.3	5.7	274	5	278	8
258	9	262	6	266	5	269.5	6	274	6.5	278	10
258	10	262	7	266	5.7	269.5	8	274	8	278	12
258	12	262	8	266	6	269.5	8.4	274	8.4	278.7	3.53
258	15	262	9	266	7	270	2.2	274	8.6	278.7	5.7
258.5	3.5	262	10	266	10	270	2.5	274.2	5.7	278.7	7.4
258.5	9	262	13	266	19	270	3	274.3	3.1	278.77	5.33
259	2.62	262	14	266.07	5.33	270	3.5	274.5	4	278.77	6.99
259	3	262.34	3.53	266.07	6.99	270	4	274.5	8.4	278.89	3.53
259	3.5	262.5	5.5	266.1	10	270	5	275	2.5	279	3
259	4	263	3.5	266.3	3.53	270	5.3	275	3	279	3.5
259	5	263	4	266.5	3	270	5.5	275	3.5	279	3.53
259	6	263	5	266.7	4.76	270	6	275	4	279	4
259	8	263	6.5	266.7	6.35	270	6.3	275	5	279	5
259	10	263.4	5	266.7	6.99	270	6.5	275	5.15	279	6
259	18	263.5	7	267	2	270	7	275	6	279	6.9
259.1	8.4	263.52	9.5	267	2.5	270	7.5	275	7	279	7
259.2	5.7	263.7	8.6	267	2.7	270	7.6	275	7.4	279	8.4
259.24	3.53	264	2.8	267	3	270	8	275	7.5	279.1	8.4
259.26	2.62	264	3	267	3.5	270	9	275	7.6	279.2	5.7
259.3	3	264	3.5	267	4	270	10	275	8	279.3	3.17
259.3	5.7	264	4	267	4.5	270	12	275	8.4	279.3	5.7
259.5	5	264	4.5	267	5	270	13	275	10	279.4	6.35

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
279.5	8.4	284.5	4	289.3	5.7	293	5.5
280	2.5	284.5	8.4	289.5	8.4	293	6
280	3	284.75	3.53	290	2	293	7
280	3.5	285	2.4	290	2.5	294	2.7
280	3.55	285	3	290	3	294	3
280	4	285	3.5	290	3.5	294	3.5
280	4.5	285	4	290	3.55	294	4
280	5	285	5	290	3.75	294	5
280	5.3	285	5.33	290	4	294	6
280	5.33	285	6	290	5	294	11.5
280	6	285	7	290	5.3	294	14
280	6.3	285	8.4	290	5.33	294	17
280	7	285	9.53	290	6	294	20
280	8	285	10	290	6.5	294.2	5.7
280	8.6	285	10.7	290	7	294.48	7
280	9	285	15	290	7.5	294.5	6
280	10	285	17	290	8	294.5	8.4
280	12	285.1	6.99	290	9	295	2
280	15	285.75	7.94	290	9.6	295	2.6
280	16	285.87	3.53	290	10	295	2.9
280	17	286	2.4	290	12	295	3
280	20	286	2.43	290	15	295	3.5
281	3.5	286	3.5	291	3	295	4
281	4	286	4	291	3.5	295	5
281	4.5	286	5	291	4	295	6
281	5	286	5.5	291	5	295	7
282	3.5	286	6	291	6.2	295	8
282	4	286	6.2	291.4	3.53	295	10
282	5	286	7	291.47	5.33	295	12
282	6	286	8	291.47	6.99	295	15
282	8	286	10	291.47	7.82	295	17
282	14	286.8	8	291.7	3.53	295	20
282.17	3.53	287	3.5	292	1.5	295.5	5
283	2	287	4	292	2.65	295.5	8.4
283	3.5	287	4.2	292	3	295.8	12.7
283	4	287	5	292	3.17	296	2.5
283	5	287	10	292	3.5	296	3
283	5.33	287	15	292	4	296	3.5
283.18	6.99	287	20	292	5	296	4
283.18	12.7	287.7	5.3	292	5.7	296	5
283.5	9	288	2.62	292	6	296	5.33
284	2.62	288	3.5	292	7	296	8.4
284	3.5	288	3.53	292	8	296	12
284	4	288	4	292	9	297	2.4
284	5	288	5	292	10	297	3
284	6	288	6	292	20	297	3.5
284	8	288	7	292.1	3.18	297	4
284	8.4	288	14	292.1	6.35	297	5
284	9	288	18	292.6	8.4	297	7
284	10	288.2	6	292.79	3.53	297	8.8
284	12	289	3.5	293	2.5	297.5	5
284	14	289	4	293	3	297.57	5.7
284.2	5.7	289	5	293	3.5	297.8	6.99
284.3	5.7	289	8.4	293	4	298	2.4
284.3	6	289.2	5.7	293	5	298	2.5

d1	d2	d1	d2	d1	d2	d1	d2	d1	d2	d1	d2
298	2.53	301	4.5	306	5	310	16	315	10	320	6
298	2.62	301	5	306	6	310.13	5.33	315	12	320	6.5
298	3.5	301	6	306	6.3	310.5	6.99	315	15	320	7
298	4	301.5	2.62	306	8	311	3.5	315	20	320	8
298	5	302	3.5	306.4	2.62	311	4	315.6	6.99	320	8.6
298	6	302	3.53	306.5	2	311	5	315.8	3.53	320	10
298	7	302	4	306.8	10	311	6	316	2.62	320	12
298	7.2	302	4.3	307	3.5	312	2.62	316	3.5	320	20
298	10	302	5	307	3.55	312	3	316	4	320.5	14
298	11	302	8	307	4	312	3.5	316	5	321	3.5
298	12	302	8.4	307	5	312	4	316	7	321	4
298	15	302	12.5	307	5.3	312	5	316	8	321	5
298.5	6.35	303	3.5	307	6.8	312	5.3	316	9	321	5.33
298.5	9	303	4	307	7	312	5.5	316	12	321	12.7
298.7	8.6	303	5	307	8.4	312	6.3	316.26	2.62	321	13
299	2.62	303	6	307	9	312	8	316.7	5.33	322	3.5
299	3.5	303	9.5	307	9.2	312	10	316.87	6.99	322	4
299	4	303.5	9	307	12	312	18	316.9	12.5	322	5
299	5	304	3	307.57	3.53	313	3	317	3.5	322	8
299	8.6	304	3.5	308	3	313	3.5	317	4	322	9
299.1	8.4	304	4	308	3.5	313	4	317	5	322	13
299.2	5.7	304	5	308	4	313	5	317	7	322.5	4
299.3	5.7	304	5.7	308	5	313	7	317	9	322.86	8.02
299.5	8.4	304	6	308	6	313	10	317.5	2.62	323	2.62
300	1	304	7	308	7	313.26	2.62	317.5	6.35	323	3.5
300	2	304	8	308	8	313.5	7	317.5	9.5	323	4
300	2.3	304	8.4	308	9	314	2.62	318	2	323	5
300	2.5	304	9.53	308.86	5.33	314	3	318	3	323	5.7
300	2.62	304.1	5.7	309	3	314	3.5	318	3.5	323	7
300	3	304.17	5.33	309	3.5	314	4	318	4	323	10
300	3.2	304.17	6.99	309	4	314	5	318	5	323.2	6.99
300	3.5	304.2	5.7	309	4.5	314	6	318	6.3	323.3	5.7
300	3.53	304.36	5.7	309	5	314	7	318	14	323.7	8.6
300	3.55	304.39	3.53	309.1	8.4	314	7.5	318.5	5	323.8	5
300	4	304.8	3.2	309.2	5.7	314	8	319	3.5	324	3.5
300	4.5	304.8	6.3	309.5	4.5	314	8.4	319	4	324	4
300	5	305	3	310	2	314	8.6	319	5	324	5
300	5.3	305	3.5	310	2.5	314	12	319	5.7	324	5.34
300	5.7	305	4	310	3	314.3	5.7	319	7	324	6
300	6	305	4.5	310	3.5	314.5	5.7	319	8.4	324	7
300	6.5	305	5	310	4	314.5	8.4	319	10	324	8
300	7	305	5.3	310	4.5	315	2.5	319.1	8.4	324	8.4
300	7.5	305	6	310	5	315	3	319.2	3.53	324	9.53
300	8	305	6.35	310	5.7	315	3.5	319.2	5.7	324	17
300	8.4	305	6.7	310	6	315	3.53	319.3	5.7	324.1	8.4
300	8.6	305	7	310	6.5	315	3.55	319.5	5.7	324.3	5.7
300	9	305	7.25	310	6.6	315	4	319.5	8.4	324.5	7.5
300	10	305	7.5	310	7	315	4.5	320	2	325	2.5
300	12	305	8	310	8	315	5	320	2.5	325	3
300	12.5	305	8.5	310	8.4	315	5.3	320	3	325	3.5
300	12.7	305	10	310	8.5	315	5.33	320	3.5	325	3.52
300	15	305	20	310	9	315	6	320	4	325	4
301	1.78	305.5	8	310	10	315	6.99	320	5	325	5
301	3.5	306	3.5	310	12	315	7	320	5.33	325	5.2
301	4	306	4	310	15	315	8	320	5.5	325	5.3

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
325	5.5	330	3.5	334.5	8.4	339	7
325	6	330	4	334.7	8.6	339	8.4
325	6.5	330	4.5	335	2.4	339	15
325	7	330	5	335	3	339.2	5.7
325	7.5	330	5.5	335	3.5	339.3	5.7
325	8	330	5.7	335	3.55	339.5	8.4
325	10	330	6	335	4	339.57	5.33
325	11	330	6.5	335	4.5	339.6	3
325	12.7	330	7	335	5	340	3
325	16	330	7.5	335	5.3	340	3.5
325.6	3.2	330	8	335	5.34	340	4
326	3	330	8.4	335	6	340	4.6
326	3.5	330	8.5	335	7	340	5
326	4	330	8.75	335	7.5	340	5.33
326	5	330	9	335	8	340	5.5
326	5.5	330	9.53	335	8.4	340	5.7
326	5.7	330	10	335	10	340	6
326	8	330	13	335	20	340	6.4
326	11	330	14	335.9	6.99	340	7
327	3.5	330	15	336	3.5	340	7.2
327	3.53	330	16	336	4	340	7.5
327	3.6	330	20	336	5	340	8
327	3.7	330.2	6.3	336	6	340	8.6
327	4	330.2	6.35	336	7	340	9.3
327	5	330.2	12.7	336	7.4	340	10
327	8	330.3	12.5	336	8	340	11
327	14	331	3	336	9.35	340	12
327.56	5.33	331	3.5	336	9.53	340	16
328	2.5	331	3.53	336	12	340.4	3
328	2.98	331	4	336.5	5.5	340.4	6
328	3	331	5	336.6	3.18	340.6	7.2
328	3.5	332	3	336.6	5.8	341	3.5
328	4	332	3.5	336.6	8	341	4
328	5	332	4	337	3.5	341	5
328	6	332	5	337	4	342	3
328	7.5	332	5.33	337	5	342	3.2
328	10	332	6	337	6	342	3.5
328	12	332	16	337	8	342	4
328.5	6	333	3.5	337.5	7	342	5
328.5	6.5	333	4	338	3	342	6
328.6	8	333	4.5	338	3.5	342	7
329	3.5	333	5	338	4	342	7.5
329	4	333	6	338	5	342	8
329	5	333	7	338	6	342.27	5.33
329	8	333	8	338	6.3	342.27	6.99
329.2	5.7	333	10	338	7	342.3	12.5
329.3	5.7	333	12	338	9	342.5	7.4
329.5	8.4	333.2	3.6	338	12	342.9	3.53
329.57	5.33	334	2.5	338	13	342.9	5.33
329.57	6.99	334	3.5	338.4	1.5	343	3.5
329.8	3.53	334	4	338.4	1.6	343	4
329.8	3.75	334	5	338.4	3.53	343	4.5
330	2	334	8	339	3.5	343	5
330	3	334.2	12.3	339	4	343	6
330	3.2	334.3	5.7	339	5	343	7

d1	d2	d1	d2	d1	d2	d1	d2	d1	d2	d1	d2
343	10	348	11	353	5	358	6	365	3	370	5.5
344	2.5	348	12	353	6	358	6.3	365	3.5	370	5.7
344	2.62	348.4	3.53	353	7	359	3.5	365	4	370	6
344	3	348.5	6	353	10	359	4	365	4.5	370	7
344	3.5	349	2.5	353.37	3.53	359	5	365	5	370	7.5
344	4	349	3	353.37	6.99	359	5.33	365	5.3	370	8
344	5	349	3.5	353.7	8.6	359	7	365	5.75	370	8.4
344	5.7	349	4	354	3	359	8	365	6	370	10
344	6	349	5	354	3.5	359	8.4	365	7	370	11
344	8	349	5.33	354	4	359.1	8.4	365	8	370	12
344	8.4	349	5.7	354	5	359.2	5.7	365	8.5	370	14
344	9	349	7.5	354	5.33	359.3	5.7	365	10	370	15
344	16	349.1	8.4	354	7.5	359.5	8.4	365.1	8.4	370.75	14
344	20	349.2	5.33	354	8	360	3	365.5	12.5	371	3.5
345	2	349.2	5.7	354.07	5.33	360	3.5	366	2.5	371	4
345	3	349.5	2.5	354.3	5.7	360	4	366	3.5	371	5
345	3.15	350	2	354.5	8.4	360	5	366	4	371	8
345	3.5	350	2.5	354.97	5.33	360	5.5	366	5	371	8.5
345	4	350	3	354.97	6.99	360	5.6	366	7	372	3.5
345	5	350	3.5	355	3	360	6	366	8	372	4
345	5.3	350	4	355	3.5	360	6.5	366	9	372	5
345	5.33	350	4.5	355	3.55	360	7	366.1	3	372	6
345	5.6	350	5	355	4	360	7.5	366.54	3.53	372	8
345	5.7	350	5.2	355	5	360	8	367	3	372	10
345	6	350	5.5	355	5.3	360	8.6	367	3.5	372	12
345	6.5	350	6	355	6	360	9	367	4	373	2
345	7	350	6.5	355	7	360	10	367	5	373	2.4
345	8	350	7	355	7.5	360	11	367	7	373	3.5
345	10	350	8	355	12	360	12	367	7.5	373	4
345	20	350	9	355	15	360	15	367	8	373	5
346	2	350	10	355	20	361	3.5	367	20	373	7
346	3	350	11	355.2	3.53	361	4	367.67	6.99	373	8
346	3.5	350	12	355.6	6.5	361	5	367.9	5.5	373.5	5
346	4	350	13	355.6	6.99	361	6	368	2.5	374	3.5
346	5	350	17	356	3.5	362	3	368	3.5	374	4
346	6	350	20	356	4	362	3.5	368	4	374	5
346	8	351	3.5	356	5	362	4	368	5	374	5.7
346	9.4	351	4	356	8	362	5	368	5.33	374	8
346	9.5	351	5	356.5	10	362	7	368	6	374	9.52
347	3.5	351	7	357	2.62	362	8	368	7	374	10
347	4	351	10	357	3	362	12	368	8	374	16
347	5	352	3	357	3.5	363	3	368	10	374.2	6.35
347	6	352	3.5	357	4	363	3.5	368.3	4.5	374.5	8.4
347	7	352	4	357	5	363	4	369	3.5	374.5	9.52
347	9	352	4.5	357	5.7	363	5	369	4	375	2.5
347	18	352	5	357	7.5	363	5.34	369	5	375	3
348	3	352	6	357	8	363	6	369	9	375	3.4
348	3.5	352	8	357	12	363	8	369.1	8.4	375	3.5
348	3.53	352	10	357.4	5	364	3.5	369.3	5.7	375	3.55
348	4	352	12	357.4	5.7	364	3.53	370	2.5	375	4
348	5	352.5	5.7	358	3	364	4	370	3	375	5
348	6	353	2.62	358	3.5	364	5	370	3.5	375	5.3
348	7	353	3	358	4	364	8.4	370	4	375	6
348	8	353	3.5	358	5	364.2	5.7	370	5	375	6.4
348	8.5	353	4	358	5.7	365	2	370	5.3	375	7

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
375	7.5	380	10	386.3	5.7	392	5
375	8	380	14	386.5	5	392	5.33
375	8.4	380	17	386.87	6.99	392	5.7
375	9	380	20	386.94	3.53	392	6
375	10	380.37	5.33	387	3	392	6.3
375	11	380.37	6.99	387	3.5	392	8
375	13	380.6	3.53	387	4	392.8	3
376	3	381	3.5	387	5	393	3
376	3.5	381	4	387	5.3	393	3.5
376	4	381	5	387	6.4	393	3.53
376	5	381	6.35	387	7	393	4
376	6	381	11.11	387	8	393	5
376	8	381.87	5.7	387	20	393	7
376	9.5	382	3	387.35	6.73	393.07	6.99
376	12	382	3.5	388	3.5	393.1	12.5
376	14	382	4	388	4	393.45	6.3
377	3.5	382	5	388	4.5	393.7	2.9
377	4	382	8	388	5	393.7	3.5
377	5	382	10	388	6	394	2.62
377	8	382	16	388	7	394	3.5
377	10	383	3	388	10	394	4
377	15	383	3.5	389	3.5	394	4.8
377.5	10	383	4	389	4	394	5
377.7	5.7	383	5	389	5	394	6
378	3	383	7.5	389	5.33	394	8
378	3.5	383	8.1	389	5.7	394	8.4
378	4	383	8.4	389	6	394	9
378	5	384	3.5	389	8	394	15
378	6	384	4	389.3	5.7	394.72	3.53
378	8	384	5	389.3	8.5	394.97	5.33
378	8.6	384	8	390	3	395	2
378	12	384	8.4	390	3.5	395	2.5
379	3.5	384	9.52	390	4	395	3
379	4	384	14.09	390	5	395	3.5
379	4.5	384.5	8.4	390	5.5	395	4
379	5	384.55	14.09	390	5.7	395	5
379	6	385	3	390	6	395	6
379.1	8.4	385	3.5	390	6.3	395	7
379.2	5.7	385	4	390	6.55	395	8
379.3	5.7	385	5	390	6.7	395	10
379.8	7	385	6	390	7	395	12
380	3	385	6.3	390	7.2	395	14
380	3.5	385	7	390	8	396	3.5
380	3.53	385	8	390	9	396	3.55
380	4	385	8.6	390	10	396	4
380	5	385	10	390	16	396	5
380	5.5	385	12.5	390	18	396	5.5
380	6	385	12.7	390.5	3.5	396	10
380	6.2	385.5	6	391	3.5	397	3.5
380	6.5	386	3.5	391	4	397	4
380	7	386	4	391	5	397	5
380	7.5	386	5	391	6.99	397	7
380	8	386	6	392	3.5	397	8
380	8.4	386	7.5	392	3.53	397	10
380	9	386	14	392	4	397	13

d1	d2										
397.1	8.4	402	6	408	3.5	414	16	420	9	427	5.5
397.51	9.53	402	6.3	408	4	414.1	8.4	420	10	427	10
397.66	3.53	402	9	408	5	414.3	5.7	420	12.7	427	20
397.7	5.7	403	3	408	6	415	3	421	3.5	428	2.62
398	2.62	403	3.5	408	6.3	415	3.5	421	4	428	3.5
398	3	403	4	408	7.5	415	4	421	5	428	4
398	3.5	403	6	408	8	415	4.5	421	5.2	428	6
398	4	403	7	408	12	415	5	421.5	2.65	428	8
398	5	403.4	5	408.3	9.5	415	5.5	422	2	429	3.5
398	6	404	3	408.41	8	415	5.7	422	3	429	4
398	8	404	3.5	409	3.5	415	6	422	3.5	429	5.7
398	10	404	4	409	4	415	7	422	4	429	6
398	12	404	6	409	10	415	7.5	422	5.7	430	3
399	3.5	404	6.5	410	3	415	8.4	422	6	430	3.5
399	4	404	8	410	3.5	415	15	422	6.9	430	4
399	4.1	404	12	410	4	416	3.5	422	7.5	430	5
399	5	404.1	8.4	410	4.5	416	4	422.2	6.2	430	5.7
399	6	405	3	410	5	416	6	422.2	6.9	430	7
399.1	8.4	405	3.5	410	5.7	416	16	423	3.5	430	7.5
399.2	5.7	405	4	410	6	417	3.5	423	3.53	430	8
399.3	5.7	405	5	410	6.3	417	3.53	423	4	430	9
399.42	5.33	405	6	410	6.5	417	4	423	6	430	10
399.5	8.4	405	6.5	410	7	417	8	423	9	430	12
399.5	8.5	405	7	410	8	417.5	5.33	423	10	430	13
399.6	8.4	405	7.5	410	8.4	417.9	7	424	3	430	15
400	2	405	8	410	9	417.96	4	424	3.5	430	17
400	2.5	405	9.5	410	10	417.96	6.99	424	4	430	20
400	3	405	10	410	12	418	3.5	424	5	430.5	5.33
400	3.5	405	12	410	15	418	4	424	7	430.66	3.53
400	4	405	15	410	20	418	5.7	424	8.5	430.66	5.33
400	4.5	405	17	410.5	7	418	7	424	9.52	430.66	6.99
400	5	405	20	411	3.5	418	8	425	3	431	3.5
400	5.3	405.26	3.53	411	4	419	3.5	425	3.5	431	4
400	5.5	405.26	5.33	411.48	5.33	419	4	425	4	431	8
400	5.6	405.26	6.99	412	3.5	419	6	425	5	431	8.4
400	6	405.26	7.5	412	4	419	7	425	5.33	431.3	8.4
400	6.3	405.26	8	412	5	419	8.4	425	5.5	431.8	3.17
400	6.5	405.3	9.5	412	7	419	14	425	6	431.8	6.35
400	6.7	406	2.62	412	8	419.1	6.35	425	6.5	432	3.5
400	7	406	3	412	9	419.1	8.4	425	7	432	4
400	7.5	406	3.5	412	10	419.2	5.7	425	8	432	5
400	8	406	4	412.7	5.6	419.3	5.7	425	8.4	432	10
400	8.4	406	5	413	3.5	419.5	8.4	425	8.5	433	3
400	8.5	406	10	413	4	419.7	6.35	425	16	433	3.5
400	9	406.26	5.33	413	12	420	2.5	425.45	3.97	433	4
400	10	406.4	3.17	413.7	5.33	420	3	425.45	9.52	433	4.5
400	12	406.4	6.35	414	3.5	420	3.5	426	3.5	433	7
400	15	406.4	6.5	414	4	420	4	426	3.53	433.36	6.99
400	16	406.4	15.8	414	5	420	5	426	4	433.5	5.5
401	3.5	407	3.5	414	5.33	420	5.33	426	5.7	434	3.5
401	4	407	4	414	6.3	420	5.5	426	6	434	4
402	3.5	407	5	414	8.4	420	6	426	17	434	5
402	4	407	5.7	414	10	420	6.5	427	3.5	434	7
402	4.5	407	6.3	414	12	420	7	427	4	434	8
402	5.33	407	6.35	414	13	420	8	427	5	434	10

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
434.5	8.4	440	6.3	449	6	457	6.35
434.9	8.25	440	7	449	6.99	457	7
435	3	440	8	449.1	8.4	457	8
435	3.5	440	8.5	449.2	6.3	457	8.4
435	4	440	9	449.3	5.7	457	9
435	5	440	10	449.8	6	457	9.52
435	5.7	440	14	449.8	6.2	457.2	7
435	6	440	15	450	3	458	4
435	7	440	16	450	4	458	6
435	8	440	20	450	5	458	9
435	8.5	440.69	2.62	450	6	458	10
435	12	440.69	5.33	450	6.3	458	12
435	14	441	2.5	450	6.5	458.5	10
435	15.2	441	4	450	7	459	4
435	20	441	5	450	8	459.2	5.7
436	3	441	8	450	8.6	459.3	5.7
436	3.5	442	4	450	10	460	3
436	4	442	6	451	4	460	4
436	7	442	12	451	7	460	5
437	3.5	443	4	451	9	460	6
437	4	443	7	451	10	460	6.5
437	6	443.36	6.99	452	4	460	7
437	7	444	3	452	5.33	460	7.4
438	3	444	4	452	6	460	8
438	3.5	444	5	452	8	460	8.2
438	4	444	6	452	12	460	8.4
438	6	444	8	452.4	9	460	8.5
438	7.5	444	8.4	453	3.5	460	10
438	12	444.2	5.7	453	4	460	12
438	12.7	445	3.53	453	5.7	461	4
438	14	445	4	453	6	461	5
438.1	3.5	445	5	453	6.35	461	7
439	3	445	5.7	453	6.4	461	8.4
439	3.5	445	6	453.3	5.7	461	8.6
439	4	445	7	454	4	461.4	8.6
439	5.7	445	8	454	5	462	3
439	6	445	9	454	8	462	4
439	7	445	12	454	9.5	462	5.33
439.1	8.4	445	15	454	10	462	7
439.2	5.7	446	4	455	3	462	10
439.3	5.7	446	5.33	455	4	462	13
439.34	5.33	446	6	455	5	462	15
439.5	4	446	8	455	6	462.1	8.4
439.5	5.7	446	10	455	6.2	463	4
440	2	446	14	455	7	463	8
440	2.5	447	4	455	8.4	463	9.5
440	2.8	447	8	455	13	463.55	7
440	3	448	3	456	4	463.55	12.7
440	3.5	448	4	456	7	464	3.5
440	4	448	5	456	7.5	464	4
440	4.2	448	6	456.06	3.53	464	6
440	4.5	448	8	456.06	5.33	464	7.5
440	5	448	10	456.06	6.99	464	8
440	5.6	448	14	457	3	464	9
440	6	449	4	457	4	465	3

d1	d2										
465	4	471	10	480	14	490	2	495	8	505	5.7
465	5	472	3.53	480	16	490	4	495	8.4	505	6
465	6	472	4	480	20	490	5	495	14	505	7
465	7	472	5	481	3.55	490	5.33	495.3	6.35	505	8
465	8.4	472	5.7	481	4	490	6	496	4	505	10
465	9	472	8	481	5.33	490	6.35	496	6	506	3.5
465	10	472	10	481	6	490	6.5	496	10	506	6
465.3	5.7	473	4	481	7	490	6.7	496	12	506	7
466	4	473	6.5	481	8	490	7	496.9	5.33	506	8
466	5	473	7.5	481	8.4	490	7.5	497	4	506.81	5.33
466.72	6.35	473.6	5.7	481.46	5.33	490	8	497	5.34	506.86	6.99
467	4	474	3	481.46	6.99	490	8.4	498	4	506.86	8
467	5.7	474	3.53	481.83	5.3	490	9	498	6.99	507	3
467	7.8	474	4	482	3.53	490	10	498	8	507	4
467	8.4	474	12	482	4	490	12	498.5	7.5	507	5
467	10	474.3	5.7	482	5	490	12.7	499	4	507	8.5
468	3.53	474.5	8.4	482	5.34	490	15	499	12	507	15
468	4	475	3	482	6	490	16	499.2	5.7	507.5	5.3
468	6	475	4	482.6	6.35	491	4	499.3	5	508	4
468	6.3	475	5	483	3	491	5.33	499.3	5.7	508	6
468	7	475	6	483	4	491.49	5.33	499.5	7	508	6.35
468	8	475	7	483	6	491.5	4	499.5	8.4	508	8
468.76	6.99	475	8	483	7	491.5	8.5	500	3	508	8.5
468.9	6.35	475	10	483	7.15	492	4	500	3.53	508	10
469	3	475	15	483	8.4	492	5.33	500	4	508	12
469	4	475.08	8.74	484	3	492	6	500	5	508.74	4
469	4.77	475.4	5	484	4	492	6.3	500	6	509	3.5
469	5.7	476	4	485	3	492	8	500	6.3	509.1	8.4
469	6.35	476	4.5	485	4	492	9	500	6.99	509.3	5.7
469	7	476	5	485	5	492	10	500	7	509.4	6
469.3	5.7	476	5.5	485	8	492.13	5.33	500	7.5	509.6	6
469.5	6.4	476	7	485	15	492.25	3.53	500	8	510	3
469.9	6.35	477	4	485.3	4.8	493	4	500	8.5	510	3.5
469.97	4.77	477	6.99	486	4	493	7	500	9	510	4
470	2.5	477	8	486	6	493	12.7	500	10	510	4.5
470	3	478	4	486	7	493.5	4	500	12	510	5
470	3.5	478	5	486	12	494	4	500	14	510	5.7
470	4	478	6	486	17	494	4.5	500	15	510	6
470	4.5	478	8	486	20	494	5.34	501	5	510	6.5
470	5	478	14	486.76	6.99	494	6	501.65	3.53	510	7
470	5.2	478	17	487	4	494	7	502	5.33	510	8
470	5.3	479	4	487	7	494	8	502	8	510	8.5
470	5.33	479.2	5.7	487	8	494.1	5.7	502	8.2	510	9
470	5.5	479.3	5.7	487	10	494.1	8.4	502	8.6	510	10
470	5.7	479.42	4.75	488	4	494.16	6.5	502	16	510	12
470	6	480	4	488	5	494.16	6.99	502.9	8.4	510	16
470	7	480	5	488	6	494.5	8	503	6	511.5	8
470	8	480	6	488	9	494.6	5.33	503	7.5	512	3
470	9.5	480	7	488	10	494.67	7	503	10	512	4
470	10	480	7.5	488.5	3	495	3	504	6	512	6
470	12	480	8	489	3	495	4	504	8	512	7
470.4	5.7	480	8.6	489	4	495	4.5	504.5	8	512	7.6
470.4	6	480	9	489	6	495	5	505	2.62	512	8
471	4	480	10	489.2	5.7	495	6.3	505	3	512	10
471	9	480	12	489.87	6.99	495	7	505	4	512	18

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
513	4	524	3	533.4	9.5	545.47	6.99
513	5.66	524.8	10	534	4	546	8
514	8	525	2.62	534	5.7	546	14
514	8.4	525	3	534	16	546	15
514	10	525	4	534.1	8.4	546.1	6.35
514	14	525	5	534.5	8.4	547	8
514.3	5.7	525	5.7	535	4	547	14
514.6	5.33	525	6	535	5	547.6	9.5
514.9	16	525	7	535	5.7	548	3.5
515	3	525	8	535	7	548	5.7
515	4	525	9	535	8	548	6.5
515	5	525	12	535	10	549	3
515	6	525.9	13	537	7	549	6
515	7	526	3.5	537	8	549	9.52
515	8	526	4	538	3	550	3
515	10	526	20	538	6	550	4
516	6	526.4	5.7	538	7	550	5
516	8	527	4.7	538	8	550	5.5
516	8.4	527	7	538	8.4	550	6
516	12	528	3	538	12	550	7
518	3	528	3.5	538.5	8	550	8
518	6.4	528	8	539	3.5	550	9
518	8	528	10	539	7	550	10
518.5	3	528	10.82	540	3	550	13
519	2.62	528	17	540	4	550	14
519	6	528.5	10.82	540	4.5	550	16
519	8	529	3	540	5	552	2.62
519.3	5.7	529	5.34	540	5.7	552	4
520	3.5	529.3	5.7	540	6	552	5.33
520	3.53	530	3	540	6.5	552	6
520	4	530	3.5	540	7	552	6.3
520	5	530	4	540	8	552	8
520	5.5	530	5	540	10	553	8
520	6	530	5.33	540	12	553	8.4
520	7	530	6	540	20	553.34	6.99
520	8	530	6.5	541	14	554	3.8
520	9	530	7	542	7	554	4
520	10	530	8	542	8	554	5
520	12	530	9	542	10	554	5.33
520.06	6.99	530	9.5	542.9	8.4	554	7
520.06	7	530	9.55	543	3.5	554	10
520.5	9.98	530	10	544	6	554	12
520.5	15	530	12	544	6.5	554.3	5.7
520.7	6.35	531	7	544	8	555	3.53
521	5.33	531	8	544	16	555	5
522	3	532	4	544.3	5.7	555	6
522	6	532	6.5	545	3	555	6.2
522	7	532	7	545	4	555	6.35
522	8	532	8.4	545	5	555	7
522	8.4	532	10	545	5.7	555	9
522	8.7	532.2	5.33	545	7	555	10
522	9.5	532.26	6.99	545	8	555	11.5
522	10	533	6	545	9	555	12
523	5	533	7	545	12	556	8
523	7	533	8	545	15	556	10

d1	d2	d1	d2	d1	d2	d1	d2	d1	d2	d1	d2
556	18	568	4.4	580	3.53	589	5	600	7	612	10
557	5.33	568	4.5	580	4	589	10	600	8	613	5.33
557.61	5.33	568	5	580	4.5	589	12	600	8.2	613	5.7
557.66	6.99	568	6	580	5	590	3	600	9	613	6.35
558	3	568	7	580	5.33	590	3.53	600	10	614	7
558	4	568	8	580	5.7	590	4	600	11	615	5
558	5.7	568.5	10	580	6	590	4.5	600	12	615	5.3
558	6.3	568.6	8.4	580	7	590	5	600	16	615	5.8
558	7	569	6	580	8	590	6	601	7.5	615	6
558	10	569	7	580	9	590	7	601.5	9.5	615	7
558.5	8.5	569.27	6.99	580	10	590	8.5	603	10	615	8.4
558.8	4	569.6	8.7	580	12	590	9	604	7	615	10
559.1	6.35	570	3	580	18	590	15	605	5	615	12
559.6	12	570	3.53	581	3.53	590	15.88	605	5.7	616	6
560	3	570	4	581	16	590	16	605	8.4	616	15.6
560	4	570	5	582	7	591	8	605.9	6.35	617	7
560	4.35	570	5.7	582	8	592	8	606	3	618	3
560	4.5	570	6	582	12	592	8.6	606	3.53	618	7
560	5	570	7	582	12.7	593	4	607	3	618	8
560	6	570	8	582	14	594	5.7	607	5	618	12.7
560	6.3	570	8.4	582.68	5.33	594	8	607	7	618	14
560	7	570	9.5	582.68	6.99	594	15	608	6	618	18
560	8	570	10	583	6.7	594.51	7.14	608	6.4	619	7
560	8.2	570	12	583	7	595	5	608	7	620	4
560	8.4	570.65	8.4	583	12	595	6	608	8.4	620	5
560	9.6	571	5	584	6.5	595	8	608	9	620	6
560	10	571	6.35	584	7	595	10	608	10	620	7
560	12	571	10	584	8.4	595	12	608	11	620	8
561	5	571.5	5	584	20	595	14	608.08	5.33	620	9
561	8	571.5	6.35	584.1	8.4	595	16	608.08	6.99	620	10
561	8.5	572	4	584.2	9.52	596	7	608.5	10	620	12
561.5	8.5	572	5.33	585	4	596	8	608.8	5.33	620	15
561.5	9	572	10	585	5	596	9	608.88	6.99	621	7
562	4	572.4	9	585	6	596.27	6.99	608.9	9	621	8
562	7.5	574	5.34	585	6.3	596.6	16	609	8	621	9
563	3	574	7	585	7	596.75	5	609.5	8	622	5.33
563	7	574	10	585	7.5	597	4.48	609.6	12.7	622	7
564	5.33	575	5	585	8	597	4.5	610	3.5	622	8
564	6	575	6	585	9.55	597	7	610	4	622	9
564	8	575	6.5	585	10	597.03	5.33	610	5	622.3	5.7
565	5	575	7	585	16	598	5.5	610	5.33	622.3	15.88
565	5.3	575	8	586	5.7	598	6	610	5.7	623	8
565	5.7	576	6	586	6	598	8	610	6	623	9
565	6	576	7	586	7	598	12	610	6.35	624	5
565	7	576	8	586	7.5	599	7.3	610	6.4	624	5.4
565	8	577	7	586	8	599.3	5.7	610	6.5	624	6.99
565	8.4	577	20	586.5	10	599.4	7.3	610	7	624	8
565	10	577	21	587	6	599.6	14.4	610	7.5	624	17
565.9	7	577.85	6.99	587	10	600	3	610	8	625	3
566	6.35	578	12	588	6	600	3.53	610	10	625	5
566	9	578	17	588	6.3	600	4	610	12	625	5.33
567	3	579	6	588	6.35	600	5	610	16	625	6
567	20	579	8	588	7	600	5.7	612	4	625	6.35
567.4	5.33	579.3	5.7	588	8.4	600	6	612	7	625	7
568	4	580	3	589	3.53	600	6.5	612	8	625	8.4

Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
625	10	640	8	656	6	669	13.2
626	7	640	9	656	7.9	669	18
628	5	641	8.6	656	8	669.5	5.6
628	7	641.6	8.7	657	8.4	670	3
628	9.05	642	3.53	658	5.7	670	4
628.5	7	642	5.7	658	6	670	5
629	3	642	8	658	7	670	6
629	5.7	643	5	658	8.2	670	7
629	6	643	8.4	658.54	5.33	670	8
629.3	5.7	643.9	8.4	658.6	8.2	670	8.4
630	3.5	644	10	658.88	5.33	670	10
630	4	644	11	658.88	6.99	671	10
630	5	645	5	658.9	7.3	671	15
630	6	645	6	659	7	672	4
630	6.3	645	7	659	9.52	672	10
630	7	645	8	660	3	672	16
630	7.2	645	10	660	3.5	673.1	3.53
630	8	646	8.4	660	4	673.5	8.2
630	8.4	647.07	7	660	5	674	5.7
630	10	647.7	5.33	660	5.3	675	5.33
630.6	8.2	647.7	6.99	660	5.33	675	7
631	9	648	5	660	5.7	675	8
632	3	648	5.3	660	6	675	15
632	8	648	6	660	7	675.16	6.99
632	12	648	7	660	8	676	8
633	6	648	8	660	9	678	10.82
633	7	648	8.4	660	10	679	5.33
633.48	5.33	648	15	660	12	679.5	3.53
633.48	6.99	649	8.4	660	12.7	679.5	5.33
634	6	650	3	660	13	680	3
634	7	650	3.53	661	10	680	4
635	5	650	4	661	14	680	5
635	5.1	650	5	662	6.9	680	5.33
635	5.7	650	5.7	662	8	680	6.3
635	6	650	6	663	5.4	680	7
635	6.35	650	6.7	663	6	680	7.3
635	7	650	7	663	8.8	680	8
635	7.3	650	8	664	10	680	8.2
635	8	650	9.5	665	5	680	8.4
635	8.4	650	10	665	5.33	680	9
635	9.5	650	11	665	5.7	680	10
635	10	650	12	665	6	680	11.5
635	12.7	650	15	665	6.35	680	12
636.9	3.53	650	20	665	7	680	15
637	10	651	4	665	8.4	680.6	8.2
638	4	651	7	665	12	681	7.5
638	4.9	651.5	11.5	665	16	681	8.2
638	6	652	6	665.18	5.33	682	6
639	4	652	9.5	665.4	6	682	7.5
640	3	653	4	666	9	682	8
640	4	653	8	667	6	683	5
640	5	654	6	667	7	683	8
640	6	654	18	668	6	683	10
640	6.3	655	4	668	7	684	6
640	7	655.34	5.33	668	12	684	7

d1	d2	d1	d2	d1	d2	d1	d2	d1	d2	d1	d2
685	3	700	12	720	4	734	7	750	7	770	7
685	4	700	13	720	5	735	5	750	7.5	770	8
685	5.34	700.4	14.8	720	6	735	6	750	8	770	8.2
685	5.7	701.8	3.53	720	6.3	735	6.35	750	8.4	770	8.3
685	6.3	701.8	7	720	6.5	735	8	750	9	770	8.4
685	6.99	702	3	720	7	736	5	750	10	770	10
685	7	702	8.6	720	8	736	7	750	15	770.3	8.4
685	20	702	20	720	10	736	9.5	751	7	771	8.5
686	3.5	702.66	5.33	720	12	736.6	5.33	752	5	771.5	8.5
686	7	703	10	722	8	736.6	6.99	752	6	774	8.4
686	8	704	10.8	722	16	736.6	8	752	7	774	20
687	6.35	704.9	13.97	723	6	736.6	9.52	752.5	8.4	774.1	8.4
687	7	705	5	723	7	737	5.33	754	7	775	5.33
688	6	705	5.3	723.9	12.7	737	7.3	754	8	775	8
690	3	705	5.33	724	5.7	737	9.5	754.5	8.4	775	8.4
690	4	705	6	724	7	738	10	755	5	775	16
690	5	705	7	724	12	738	10.25	755	5.34	776	7
690	5.33	705	8	725	3.53	738.5	8.2	755	7	778	3
690	6	705	14	725	4	739	3	755	8.4	779	10
690	7	705.6	8.2	725	5	740	4	756	7	779.46	5.33
690	7.5	707.54	6.99	725	5.33	740	5	757	3	780	5
690	8	708	4	725	5.7	740	5.3	757	7	780	5.7
690	8.4	708	6	725	6	740	6	758	6	780	6
690	9	708	7	725	6.99	740	6.3	758	8	780	7
690	10	710	3	725	7	740	6.35	758	12	780	7.5
691	8	710	4	725	9	740	7	758	12.7	780	8
692	5.34	710	5	725	10	740	8.4	758.8	7	780	8.4
692	7	710	5.7	725	17	740	9	758.83	13.97	780	9
694	6	710	6	726	7	740	10	759	5.7	780	10
694	7	710	7	726	12	740	12	760	5	780	11
694	10	710	8	726	13	740	20	760	5.33	780	12
695	6	710	8.4	726.6	12	741.5	10	760	5.9	780.47	5.34
695	8	710	9	727	8	742	7	760	6	782	6.99
695	8.4	710	10	728.98	13.97	742	8.4	760	7	782	9
695	10	710	12	729	7	742	10	760	8	782	10
696	7	712	10	730	3.53	742	20	760	8.4	783	10
697	4	712	11	730	4	742.9	6.99	760	10	784	7
697	12	713	7	730	5	743	3.5	760	12	784	8.5
698	7	714	8	730	5.7	743	7	760	14	785	3
699	7	714.3	5	730	7	743	8	761	8	785	5
700	3	715	5.7	730	8	743.3	5.7	762	5	785	6.35
700	4	715	8	730	8.2	744	8	762	6.35	785	7
700	4.15	715	8.4	730	8.4	745	6.35	762	15	785	8
700	5	715	10	730	9	745	7	763	6.99	785	8.4
700	5.3	716	5.3	730	10	745	8.4	763	7	785	10
700	5.7	716	7	730	12	745	10	764.3	5.7	785	16
700	6	717	10	730	16	748	3	765	7	785	20
700	6.3	718	5.4	730.4	13.97	748	5.33	765	12	786	6
700	6.35	718	6	730.5	7	749	3	766	5.33	786	7
700	7	718	8	731	7	749	5.7	766	7	786	10
700	7.3	718	9.5	731	10	750	3.53	767	10	787	7
700	8	719	3	731.32	6.99	750	4	767	19	787	8.4
700	8.4	719	6.9	731.52	7	750	5	768	8.4	788	6
700	9	719	12	732	9	750	5.33	769.3	5.7	789	10.82
700	10	719.3	5.7	732.4	8	750	6	770	4	790	5


Dichtomatik dimensions

d1	d2	d1	d2	d1	d2	d1	d2
790	5.33	815	8	840	4	864	3.2
790	5.7	815	10	840	4.5	864	5
790	6.5	816	5	840	5	864	10
790	8	817	8.4	840	6.35	865	3
790	10	818	12	840	7	865	6
790.3	8.4	819.3	5.7	840	8	865	8
791	10	819.87	7	840	9	865	8.4
792	8	820	3.53	840	10	865	9
792	20	820	5	840	12	865	10
793	12	820	5.33	840	20	865	12
794	3.53	820	6	840	25	865	14
794	7	820	6.3	842	7	865.8	16.5
794	8.4	820	7	843	7	867	7
795	5.33	820	8	843	10	868	10
795	7	820	9	844	3	869.3	5.7
797.3	5.7	820	10	844	7	870	5
798	4.2	820	12	844.2	5.7	870	6
798	5.7	820	20	845	2.5	870	8
799	8.4	822	5	845	7	870	10
799	12	822.5	8.4	845	8	870	12
799.5	8.4	825	5.33	845	8.4	872	5
800	3.53	825	8	845	10	874	3
800	4	825	9	846	7	874.5	8.4
800	5	825	10	846	8	875	4
800	5.33	825	20	847	5.34	875	5.33
800	5.7	826	6	850	3	875	6.99
800	6	826	7	850	4	875	8
800	7	828	6	850	5	875	10
800	8	828	7	850	6	876	7
800	8.4	829	8	850	7	880	5
800	9	829	10	850	8	880	7
800	10	830	4	850	8.4	880	8
801	3	830	5	850	9	880	8.4
802	15.6	830	5.33	850	10	880	10
804	6.35	830	6	850	14.5	881	7
804	8	830	7	850	15	882	3
804.2	5.7	830	8.4	850	20	882	6.35
805	5.33	830	9	853	5.33	882	7
805	20	830	10	854	5.7	882	10
806	6	831	3	854	7	882.6	6.35
806	6.99	834	6.5	854	15.9	883	3
806	10	834	10.5	855	6	883	12
809	3.1	835	5.3	855	7	885	4
809	5	835	5.34	855	8	885	5.5
809.63	7	835	8	855	10	885	8
810	6	835	10	858	16.5	885	8.4
810	7	835	12	860	3	886	7
810	8	836	5.7	860	5.34	887	7
810	8.4	836	7	860	6.99	888	8.4
810	9	837	9.5	860	7	889	8
810	10	837	10	860	8	889.2	5.7
813	12	838	5	860	10	890	3.53
814	5.33	838	6	860	12	890	5
815	5	838.2	9.52	860	20	890	5.3
815	6	839	5.7	863	7	890	5.34

d1	d2	d1	d2	d1	d2	d1	d2	d1	d2	d1	d2
890	5.7	922	7	960	7	1002	3.53	1045	5.33	1100	5
890	6	925	5.33	960	8.4	1003	6.99	1045	5.7	1100	6
891	17	925	7	960	10	1003.6	8.4	1046	7	1100	7
892	8	925	8	961	12	1005	6	1046	12	1100	8.4
894	3.53	925	10	963	6.35	1005	9.52	1047	14.8	1100	9
894	12	926	5.34	963	10	1005.85	9.52	1050	7	1100	12
894	13	927	3	964.3	5.7	1006	5.33	1050	8	1100	20
894	14	927	6	965	5	1010	3.53	1050	9	1102	5.33
895	3.53	927	8	965	7	1010	5	1050	10	1108	10
895	4	930	5	965	7.14	1010	5.3	1051	5.34	1110	3.53
895	6	930	6	965	8	1010	6.99	1052	6	1110	6.99
895	8	930	7	965	10	1010	7	1054	10	1110	9
895	8.4	930	9	968	7	1010	8	1056	12	1112	7
895	12	930	10	968	12	1010	9	1057	5	1112	8.4
900	5	932	12	969	6	1010	10	1060	5.34	1113	7
900	5.33	932.54	6.99	970	5.33	1012	9	1060	8	1114	8.4
900	6.35	933	7	970	7	1013	6	1060	8.4	1116	12
900	7	934	8.4	970	10	1013	7	1060	10	1120	4.76
900	7.5	935	8	975	5	1014	5.34	1060	11	1120	6.35
900	8	935	10	975	5.33	1014	8	1062	5.5	1120	6.99
900	9	935	20	975	6	1014	8.4	1062	6	1120	8.4
900	10	936	9.52	975	6.99	1014	9.5	1065	8.4	1120	10
902	4	936	10	975	7	1015	8	1065	10	1122	5
902.6	3	938	7	975	8	1016	6.35	1066	5.33	1125	5.33
904	6.99	939.3	5.7	977	7	1016	7	1067	16	1125	8
904	7	940	5	980	5	1016.4	12	1068	8	1125	14.8
905	3.53	940	6	980	8	1017	5	1070	7	1125	15
905	10	940	6.35	980	9	1019	5.7	1070	12	1127.6	8.4
906	7	940	10	980	10	1020	4	1071	6	1129	5.7
907	5.33	940	12	980	12	1020	8	1071	7	1130	5
910	5	941	3	980	16.5	1020	10	1075	5.33	1130	5.7
910	6.5	944	7	981	11	1023	7	1075	5.7	1130	7
910	8	945	7	982	3	1023	15	1075	8.4	1130	8
910	8.4	945	10	983	7	1024	7	1075	20	1130	9
910	10	950	3	984	3	1025	5.33	1077	6.99	1130	10
910	12	950	5	985	8.4	1025	12	1080	5.33	1134	8.4
913	6	950	6	985	16	1026	3	1080	7	1135	5.34
914	3.2	950	7	987	8	1026	6.99	1080	8	1135	8
914	9.52	950	8	987	10	1027	12	1080	9	1139	5.37
914.4	6.35	950	10	988	5.33	1029	6.35	1080	10	1140	7
914.4	9.52	950	20	988	7	1030	5.7	1082	5	1140	12
915	6	952	7	990	6.35	1030	8	1082	5.34	1142	7
915	8.4	952.5	7	990	8	1030	9	1085	7	1142	8
915	10	953	7	990	9	1030	10	1085	12	1143	6.35
916	7	954	4	990	12	1030	13	1088	12	1145	8.4
918	5.7	955	9	992	8	1030	13.7	1090	6	1145	10
918	6	955	10	995	7	1030	14	1090	6.99	1145	19.8
918	12	956	3.53	1000	3	1033	12	1090	8	1150	4
920	4	956	7	1000	6	1035	10	1090	9	1150	7
920	6	957	3	1000	7	1036	9	1090	10	1150	8
920	7	957	5.34	1000	8	1038	10	1090	12	1150	8.4
920	8	957	7	1000	8.4	1040	5.33	1094.3	5.7	1150	10
920	8.5	957	20	1000	10	1040	7	1095	4	1150	16
920	10	958	10	1000	12	1040	10	1095	8	1151	12
920	12	959	8.4	1000	15	1044	8	1098	6.35	1155	6.35

Dichtomatik dimensions

d1 d2 d1 d2

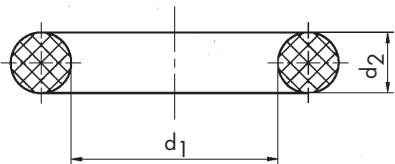

1157	5.33	1320	10
1160	5.7	1325	10
1160	8	1340	8
1160	9	1350	6
1160	10	1350	10

1164.5	5.33	1350	12
1165	10	1368.42	6.99
1170	5.5	1370	5
1170	7	1370	10
1170	10	1375	6

1172	5	1380	7
1172	5.7		
1175	5		
1175	15		
1180	7		

1180	8
1180	8.4
1185	7
1185	8
1185	12

1190	7
1192	10
1195	8
1209	6.35
1210	8

1220	5
1220	10
1225	8
1226	7
1230	7


1235	15
1240	8.4
1240	10
1246	8
1250	10

1260	5
1260	6.35
1260	10
1260	12
1265	7

1268	5
1270	6
1270	10
1280	10
1286	14

1290	7
1290	10
1295	15
1300	6
1300	10

1300	15
1305	8
1307.5	6
1320	7
1320	8

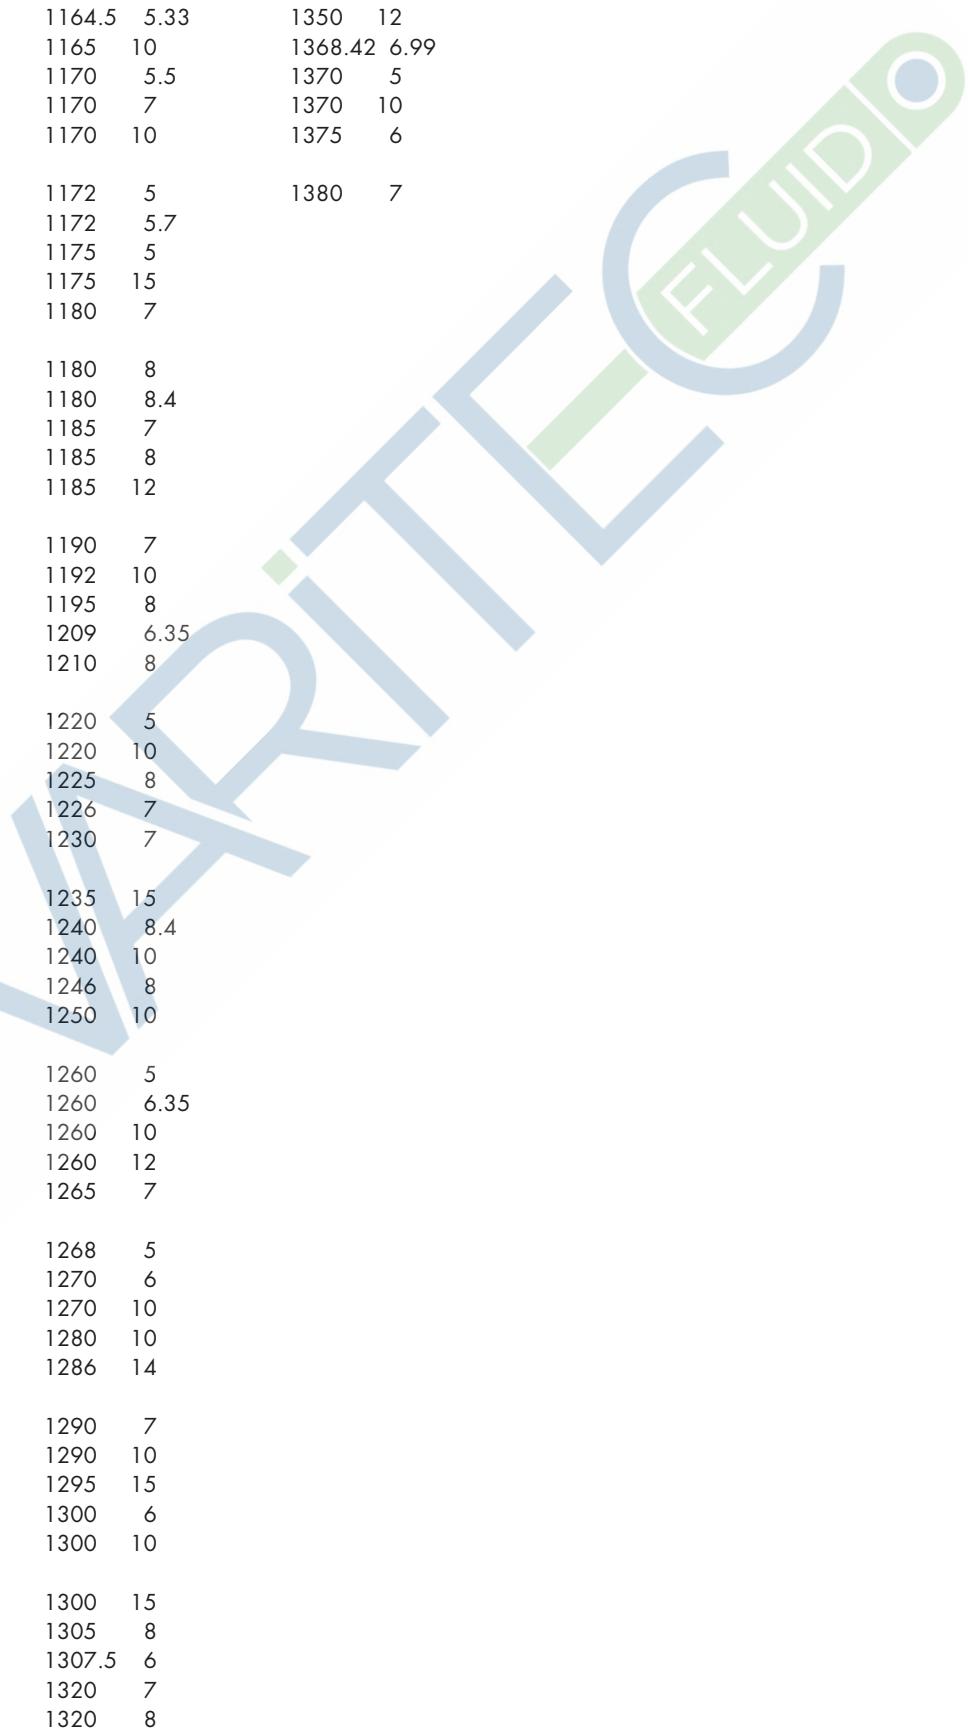



Germany
DICTOMATIK GMBH

Albert-Schweitzer-Ring 1
D-22 045 Hamburg
P.O. Box 70 04 80
D-22 004 Hamburg
Phone 040/66 98 90
Fax 040/66 98 91 01
mail@dichtomatik.de
www.dichtomatik.de

Sweden
DICTOMATIK AB

Hjalmar Brantings Väg 25
S-26143 Landskrona
Box 142
S-26122 Landskrona
Phone 0418/44 98 00
Fax 0418/44 98 20
mail@dichtomatik.se
www.dichtomatik.se

The Netherlands
DICTOMATIK B.V.

Benjamin Franklinstraat 6
NL-8013 NC Zwolle
Postbus 40 102
NL-8004 DC Zwolle
Phone 038/46 01 606
Fax 038/46 71 900
mail@dichtomatik.nl
www.dichtomatik.nl

Italy
DICTOMATIK S.R.L.

Via Delle Fabbriche 6
I-16158 Genova-Voltri
Phone 010/612 75
Fax 010/613 38 61
mail@dichtomatik.it
www.dichtomatik.it

Great Britain
DICTOMATIK LIMITED

Donington House
Riverside Road
Pride Park
Derby DE24 8HX
Phone 01332/52 44 00
Fax 01332/52 44 04
mail@dichtomatik.co.uk
www.dichtomatik.co.uk

France
DICTOMATIK S.A.S.

Espace Entreprises
Mâcon Loché TGV
F-71000 Loché
Phone 03/85 27 02 80
Fax 03/85 35 69 37
mail@dichtomatik.fr
www.dichtomatik.fr

Austria
DICTOMATIK HANDELSGES. MBH

Rautenweg 17
A-1220 Wien
Phone 01/259 35 41
Fax 01/259 35 41 31
mail@dichtomatik.co.at
www.dichtomatik.co.at

Hungary
DICTOMATIK KFT.

Üllöi UT 288
H-1184 Budapest
Phone 01/297 43 45
Fax 01/297 02 18
szimering@elender.hu
www.dichtomatik.de

The technical details in this catalogue are based on experience and standard tests repeated in quality assurance and are to be seen as general and non-binding approximate values which may well vary up or down. We therefore recommend that you consult our technical department for concrete cases in which limits may be reached.


The catalogue details may be altered without notice. Upon the publication of a new catalogue, previous editions cease to be valid.

Reproduction in any form requires the express consent of Dichtomatik GmbH.



Snur cauciuc RS

Material : Cauciuc NBR, FPM,EPDM, MVQ



Denumire	D
RS-1 - NBR 70	1
RS-1.5 - NBR 70	1.5
RS-1.5 - Silicon	1.5
RS-1.6 - NBR 70	1.6
RS-1.78 - NBR 70	1.78
RS-1.78 - FKM75	1.78
RS-2 - EPDM	2
RS-2 - NBR 70	2
RS-2.4 - NBR 70	2.4
RS-2.5 - NBR 70	2.5
RS-2.62 - NBR 70	2.62
RS-3 - NBR 70	3
RS-3 - Silicon	3
RS-3 - EPDM	3
RS-3.2 - NBR 70	3.2
RS-3.5 - NBR 70	3.5
RS-4 - NBR 70	4
RS-4 - Silicon	4
RS-4.5 - NBR 70	4.5
RS-5 - NBR 70	5
RS-5 - Silicon	5
RS-5 - EPDM	5
RS-5.33 - NBR 70	5.33

Denumire	D
RS-5.33 – FKM75	5.33
RS-5.5 - NBR 70	5.5
RS-5.7 - NBR 70	5.7
RS-5.7 - Silicon	5.7
RS-6 - NBR 70	6
RS-6.35 - NBR 70	6.35
RS-6.35 - Silicon	6.35
RS-6.5 - NBR 70	6.5
RS-7 - NBR 70	7
RS-7 - Silicon	7
RS-7.5 - NBR 70	7.5
RS-8 - NBR 70	8
RS-8 - Silicon	8
RS-8 – FKM75	8
RS-8 – EPDM	8
RS-8.5 - NBR 70	8.5
RS-9 - NBR 70	9
RS-9.5 - NBR 70	9.5
RS-10 - NBR 70	10
RS-11 - NBR 70	11
RS-12 - NBR 70	12
RS-13 - NBR 70	13
RS-14 - NBR 70	14

O-Ring Service Sortimente NBR / FPM / MVQ / EPDM

O-Ring Service Kits NBR / FPM / MVQ / EPDM

Alle Boxen sind in folgender Standardbefüllung ab Lager verfügbar:

1. Box A »Zoll« - Standard
Box C metrischer Standard
 2. Box B »Zoll« - Standard
Box D metrischer Standard
 3. Box F französischer Standard
 4. Box G »Zoll« - Standard
 5. Box H metrischer Standard
 6. Box K »Zoll« - Standard
 7. Box L metrischer Standard
 8. Box S schwedischer Standard
- NBR 70
NBR 90
FPM 80
VMQ 70 (nur für Box G, H, K, L, S)
EPDM 70 (nur für Box A, B, C, D
G, H, K)
Andere Werkstoffe sind möglich.

Rundschnur Service Sortimente Cord Service Kits

X-Ring Service Sortimente X-Ring Service Kits

All kits available from stock in the following standard compounds:

1. Box A inch standard
Box C metric standard
 2. Box B inch standard
Box D metric standard
 3. Box F French standard
 4. Box G inch standard
 5. Box H metric standard
 6. Box K inch standard
 7. Box L metric standard
 8. Box S Swedish standard
- NBR 70
NBR 90
FPM 80
VMQ 70 (only Box G, H, K, L, S)
EPDM 70 (only Box A, B, C, D
G, H, K)
Other compounds on request.

9. metrischer / »Zoll« - Standard
NBR 70
FPM 75

9. metric / inch standard
NBR 70
FPM 75

10. Box Q »Zoll« - Standard
NBR 70
FPM 75

10. Box Q inch standard
NBR 70
FPM 70



Box A 30 Abmessungen = 340 Stück / 30 Sizes = 340 pieces

20 x				
2,90 x 1,78	3,68 x 1,78	4,48 x 1,78	5,28 x 1,78	6,07 x 1,78
ARP/BS 006	ARP/BS 007	ARP/BS 008	ARP/BS 009	ARP/BS 010
20 x	20 x	15 x	15 x	10 x
7,66 x 1,78	9,25 x 1,78	10,82 x 1,78	12,42 x 1,78	14,00 x 1,78
ARP/BS 011	ARP/BS 012	ARP/BS 013	ARP/BS 014	ARP/BS 015
10 x	5 x	5 x	15 x	15 x
15,60 x 1,78	17,16 x 1,78	18,77 x 1,78	9,19 x 2,62	10,78 x 2,62
ARP/BS 016	ARP/BS 017	ARP/BS 018	ARP/BS 110	ARP/BS 111
15 x	15 x	10 x	10 x	10 x
12,37 x 2,62	13,95 x 2,62	15,54 x 2,62	17,13 x 2,62	18,72 x 2,62
ARP/BS 112	ARP/BS 113	ARP/BS 114	ARP/BS 115	ARP/BS 116
5 x	5 x	5 x	5 x	5 x
20,29 x 2,62	21,89 x 2,62	23,47 x 2,62	18,64 x 3,53	20,22 x 3,53
ARP/BS 117	ARP/BS 118	ARP/BS 119	ARP/BS 210	ARP/BS 211
5 x	5 x	5 x	5 x	5 x
21,82 x 3,53	23,40 x 3,53	24,99 x 3,53	26,58 x 3,53	28,17 x 3,53
ARP/BS 212	ARP/BS 213	ARP/BS 214	ARP/BS 215	ARP/BS 216

Box B 24 Abmessungen = 275 Stück / 24 Sizes = 275 pieces

15 x					
20,35 x 1,78	21,95 x 1,78	25,07 x 2,62	26,64 x 2,62	28,25 x 2,62	29,82 x 2,62
ARP/BS 019	ARP/BS 020	ARP/BS 120	ARP/BS 121	ARP/BS 122	ARP/BS 123
10 x	10 x	10 x	15 x	15 x	15 x
31,42 x 2,62	33,0 x 2,62	34,59 x 2,62	29,75 x 3,53	31,34 x 3,53	32,92 x 3,53
ARP/BS 124	ARP/BS 125	ARP/BS 126	ARP/BS 217	ARP/BS 218	ARP/BS 219
10 x	10 x	10 x	10 x	10x	10 x
34,52 x 3,53	36,10 x 3,53	37,69 x 3,53	40,87 x 3,53	44,04 x 3,53	47,22 x 3,53
ARP/BS 220	ARP/BS 221	ARP/BS 222	ARP/BS 223	ARP/BS 224	ARP/BS 225
10 x	10 x	10 x	10 x	5 x	5 x
50,40 x 3,53	37,47 x 5,33	40,65 x 5,33	43,82 x 5,33	47,00 x 5,33	50,16 x 5,33
ARP/BS 226	ARP/BS 325	ARP/BS 326	ARP/BS 327	ARP/BS 328	ARP/BS 329

Box C 30 Abmessungen = 425 Stück / 30 Sizes = 425 pieces

20 x	20 x	20 x	20 x	20 x
3,0 x 1,5	5,0 x 1,5	7,0 x 1,5	9,0 x 1,5	11,0 x 1,5
20 x	20 x	20 x	20 x	20 x
6,0 x 2	8,0 x 2	10,0 x 2	12,0 x 2	14,0 x 2
15 x	15 x	15 x	15 x	15 x
6,3 x 2,4	8,3 x 2,4	11,3 x 2,4	13,3 x 2,4	17,3 x 2,4
15 x	15 x	15 x	15 x	15 x
5,0 x 2,5	7,0 x 2,5	10,0 x 2,5	12,0 x 2,5	15,0 x 2,5
10 x	10 x	10 x	10 x	10 x
10,0 x 3	12,0 x 3	14,0 x 3	16,0 x 3	18,0 x 3
5 x	5 x	5 x	5 x	5 x
20,2 x 3	22,2 x 3	24,2 x 3	26,2 x 3	30,2 x 3

Box D 24 Abmessungen = 285 Stück / 24 Sizes = 285 pieces

15 x 18,0 x 2	15 x 20,0 x 2	15 x 22,0 x 3	15 x 25,0 x 3	15 x 28,2 x 3	15 x 30,2 x 3
10 x 32,2 x 3	10 x 36,2 x 3	15 x 25,0 x 4	15 x 30,0 x 4	15 x 32,0 x 4	15 x 34,0 x 4
15 x 36,0 x 4	10 x 38,0 x 4	10 x 40,0 x 4	10 x 44,0 x 4	10 x 48,0 x 4	10 x 50,0 x 4
10 x 25,0 x 5	10 x 30,0 x 5	10 x 35,0 x 5	10 x 40,0 x 5	5 x 45,0 x 5	5 x 50,0 x 5

Box F 32 Abmessungen = 372 Stück / 32 Sizes = 372 pieces

10 x 2,6 x 1,9 R1	10 x 3,4 x 1,9 R2	10 x 4,2 x 1,9 R3	10 x 4,9 x 1,9 R4	18 x 5,7 x 1,9 R5	18 x 6,4 x 1,9 R5a	18 x 7,2 x 1,9 R6	18 x 8,0 x 1,9 R6a
13 x 13,6 x 2,7 R11	13 x 12,1 x 2,7 R10	13 x 10,5 x 2,7 R9	13 x 8,9 x 2,7 R8	15 x 8,9 x 1,9 R7			
13 x 15,1 x 2,7 R12	13 x 16,9 x 2,7 R13	13 x 18,4 x 2,7 R14	10 x 18,3 x 3,6 R15				
10 x 37,3 x 3,6 R27	7 x 37,47 x 5,33 R28	7 x 40,65 x 5,33 R29	7 x 43,82 x 5,33 R30				
10 x 35,6 x 3,6 R26	10 x 34,1 x 3,6 R25	10 x 32,5 x 3,6 R24	10 x 30,8 x 3,6 R23	10 x 29,3 x 3,6 R22			
10 x 19,8 x 3,6 R16	10 x 21,3 x 3,6 R17	10 x 23,0 x 3,6 R18	10 x 24,6 x 3,6 R19	10 x 26,2 x 3,6 R20	10 x 27,8 x 3,6 R21		

Box G 30 Abmessungen = 382 Stück / 30 Sizes = 382 pieces

20 x 2,9 x 1,78 ARP/BS 006	20 x 3,68 x 1,78 ARP/BS 007	20 x 4,48 x 1,78 ARP/BS 008	20 x 5,28 x 1,78 ARP/BS 009	20 x 6,07 x 1,78 ARP/BS 010	20 x 7,66 x 1,78 ARP/BS 011
13 x 13,95 x 2,62 ARP/BS 113	13 x 12,37 x 2,62 ARP/BS 112	13 x 10,78 x 2,62 ARP/BS 111	13 x 9,19 x 2,62 ARP/BS 110	20 x 9,25 x 1,78 ARP/BS 012	
13 x 15,54 x 2,62 ARP/BS 114	13 x 17,13 x 2,62 ARP/BS 115	13 x 18,72 x 2,62 ARP/BS 116	10 x 18,64 x 3,53 ARP/BS 210		
10 x 37,69 x 3,53 ARP/BS 222	7 x 37,47 x 5,33 ARP/BS 325	7 x 40,65 x 5,33 ARP/BS 326	7 x 43,82 x 5,33 ARP/BS 327		
10 x 36,10 x 3,53 ARP/BS 221	10 x 34,52 x 3,53 ARP/BS 220	10 x 32,92 x 3,53 ARP/BS 219	10 x 31,34 x 3,53 ARP/BS 218	10 x 29,75 x 3,53 ARP/BS 217	
10 x 20,22 x 3,53 ARP/BS 211	10 x 21,82 x 3,53 ARP/BS 212	10 x 23,40 x 3,53 ARP/BS 213	10 x 24,99 x 3,53 ARP/BS 214	10 x 26,58 x 3,53 ARP/BS 215	10 x 28,17 x 3,53 ARP/BS 216

Box H 30 Abmessungen = 404 Stück / 30 Sizes = 404 pieces

18 x 3 x 2	18 x 4 x 2	18 x 5 x 2	18 x 6 x 2	17 x 7 x 2	17 x 8 x 2
14 x 14 x 2,5	14 x 12 x 2,5	14 x 11 x 2,5	14 x 10 x 2,5	17 x 10 x 2	
14 x 16 x 2,5	14 x 17 x 2,5	14 x 19 x 2,5	12 x 19 x 3		
12 x 38 x 3	9 x 38 x 4	9 x 42 x 4	9 x 45 x 4		
12 x 36 x 3	12 x 35 x 3	12 x 33 x 3	12 x 32 x 3	12 x 30 x 3	
12 x 20 x 3	12 x 22 x 3	12 x 24 x 3	12 x 25 x 3	12 x 27 x 3	12 x 28 x 3



Box K 32 Abmessungen = 407 Stück / 32 Sizes = 407 pieces

20 x 12,42 x 1,78 ARP/BS 014	13 x 10,78 x 2,62 ARP/BS 111	13 x 13,95 x 2,62 ARP/BS 113	13 x 17,13 x 2,62 ARP/BS 115	13 x 20,29 x 2,62 ARP/BS 117			
20 x 9,25 x 1,78 ARP/BS 012	20 x 7,66 x 1,78 ARP/BS 011	20 x 6,07 x 1,78 ARP/BS 010	10 x 4,48 x 1,78 ARP/BS 008	10 x 4,48 x 1,78 ARP/BS 008	10 x 2,9 x 1,78 ARP/BS 006		10 x 2,9 x 1,78 ARP/BS 006
13 x 9,19 x 2,62 ARP/BS 110	13 x 12,37 x 2,62 ARP/BS 112	13 x 15,54 x 2,62 ARP/BS 114	13 x 18,72 x 2,62 ARP/BS 116	13 x 21,89 x 2,62 ARP/BS 118			
10 x 31,34 x 3,53 ARP/BS 218	10 x 34,52 x 3,53 ARP/BS 220	10 x 37,69 x 3,53 ARP/BS 222	10 x 44,04 x 3,53 ARP/BS 224	10 x 50,40 x 3,53 ARP/BS 226			
10 x 28,17 x 3,53 ARP/BS 216	10 x 26,58 x 3,53 ARP/BS 215	10 x 24,99 x 3,53 ARP/BS 214	10 x 23,40 x 3,53 ARP/BS 213	10 x 21,82 x 3,53 ARP/BS 212	10 x 20,22 x 3,53 ARP/BS 211		10 x 18,64 x 3,53 ARP/BS 210
10 x 29,75 x 3,53 ARP/BS 217	10 x 32,92 x 3,53 ARP/BS 219	10 x 36,10 x 3,53 ARP/BS 221	10 x 40,87 x 3,53 ARP/BS 223	10 x 47,22 x 3,53 ARP/BS 225			

Box L 32 Abmessungen = 392 Stück / 32 Sizes = 392 pieces

17 x 12 x 2	17 x 11 x 2	17 x 14 x 2	17 x 17 x 2	17 x 20 x 2			
17 x 10 x 2	17 x 8 x 2	18 x 6 x 2	9 x 5 x 2	17 x 4 x 1	18 x 3 x 1		18 x 3 x 1
11 x 10 x 3	11 x 12 x 3	11 x 16 x 3	11 x 18 x 3	11 x 22 x 3			
7 x 30 x 5	9 x 34 x 4	7 x 35 x 5	9 x 45 x 4	9 x 50 x 4			
7 x 25 x 5	7 x 25 x 5	8 x 25 x 4	9 x 24 x 4	9 x 22 x 4	9 x 20 x 4		7 x 16 x 5
8 x 30 x 4	7 x 32 x 5	9 x 36 x 4	9 x 40 x 4	8 x 47 x 4			

Box S 30 Abmessungen = 460 Stück / 30 Sizes = 460 pieces

20 x 46 5060 (8,1 x 1,6)	15 x 46 5344 (19,1 x 1,6)	20 x 46 1547 (5,3 x 2,4)	20 x 46 4453 (12,3 x 2,4)	10x 46 1556 (32,2 x 3)	10 x 46 3730 (49,5 x 3)
20 x 46 2723 (9,1 x 1,6)	15 x 46 2301 (22,1 x 1,6)	20 x 46 4186 (6,3 x 2,4)	15 x 46 3744 (14,3 x 2,4)		
20 x 46 5061 (11,1 x 1,6)	15 x 46 5242 (25,1 x 1,6)	20 x 46 1492 (7,3 x 2,4)	15 x 46 4454 (16,3 x 2,4)	10 x 46 2047 (36,2 x 3)	5 x 46 1330 (44,2 x 5,7)
20 x 46 6020 (13,1 x 1,6)	15 x 46 3886 (29,1 x 1,6)	20 x 46 4451 (8,3 x 2,4)	10 x 46 1377 (19,2 x 3)		
15 x 46 5062 (15,1 x 1,6)	20 x 46 1533 (3,3 x 2,4)	20 x 46 1412 (9,3 x 2,4)	10 x 46 1378 (22,2 x 3)	10 x 46 1723 (42,2 x 3)	5 x 46 1392 (49,2 x 5,7)
15 x 46 5288 (17,1 x 1,6)	20 x 46 4450 (4,3 x 2,4)	20 x 46 4452 (10,3 x 2,4)	10 x 46 1375 (24,2 x 3)		

Box Q NBR 70 30 Abmessungen = 377 Stück / 30 Sizes = 377 pieces

FPM 70 30 Abmessungen = 374 Stück / 30 Sizes = 374 pieces

20 x 2,9 x 1,78 XR - 006	20 x 3,68 x 1,78 XR - 007	20 x (19 x) 4,48 x 1,78 XR - 008	20 x (19 x) 5,28 x 1,78 XR - 009	20 x (19 x) 6,07 x 1,78 XR - 010	19 x 7,66 x 1,78 XR - 011
13 x 13,95 x 2,62 XR - 113	13 x 12,37 x 2,62 XR - 112	13 x 10,78 x 2,62 XR - 111	13 x 9,19 x 2,62 XR - 110	20 x (19 x) 9,25 x 1,78 XR - 012	
13 x 15,54 x 2,62 XR - 114	13 x 17,13 x 2,62 XR - 115	13 x 18,72 x 2,62 XR - 116	10 x 18,64 x 3,53 XR - 210		
9 x (10 x) 37,69 x 3,53 XR - 222	6 x 37,47 x 5,33 XR - 325	6 x 40,65 x 5,33 XR - 326	6 x 43,82 x 5,33 XR - 327		
10 x 36,10 x 3,53 XR - 221	10 x 34,52 x 3,53 XR - 220	10 x 32,92 x 3,53 XR - 219	10 x 31,34 x 3,53 XR - 218	10 x 29,75 x 3,53 XR - 217	
10 x 20,22 x 3,53 XR - 211	10 x 21,82 x 3,53 XR - 212	10 x 23,40 x 3,53 XR - 213	10 x 24,99 x 3,53 XR - 214	10 x 26,58 x 3,53 XR - 215	10 x 28,17 x 3,53 XR - 216

Rundschnur Service Sortimente
Cord Service Kits

mm	1,78	2	2,4	2,62	3	3,53	4	4,5	5	5,33	5,7	6	7{6,99}	8
NBR	2m	2m	2m	2m	2m	2m	2m	2m	2m	2m	2m	2m	2m	2m
FPM	1m	1m	1m	1m	1m	1m	1m	1m	1m	1m	1m	1m	1m	1m

Messer, Schneidevorrichtung, Kleber, Maßband / Knife, cutting device, glue material, measuring tape


Sollten Sie Bedarf an Boxen mit anderen Abmessungsinhalten haben, besteht die Möglichkeit, die Boxen speziell nach Ihren Wünschen zu bestücken. Rufen Sie uns an!

Should you have demand on different size contents, please do not hesitate to contact us. We are also prepared to offer boxes according to your requirements.

DICHTOMATIK

X-Ringe/X-rings

FLUIDO

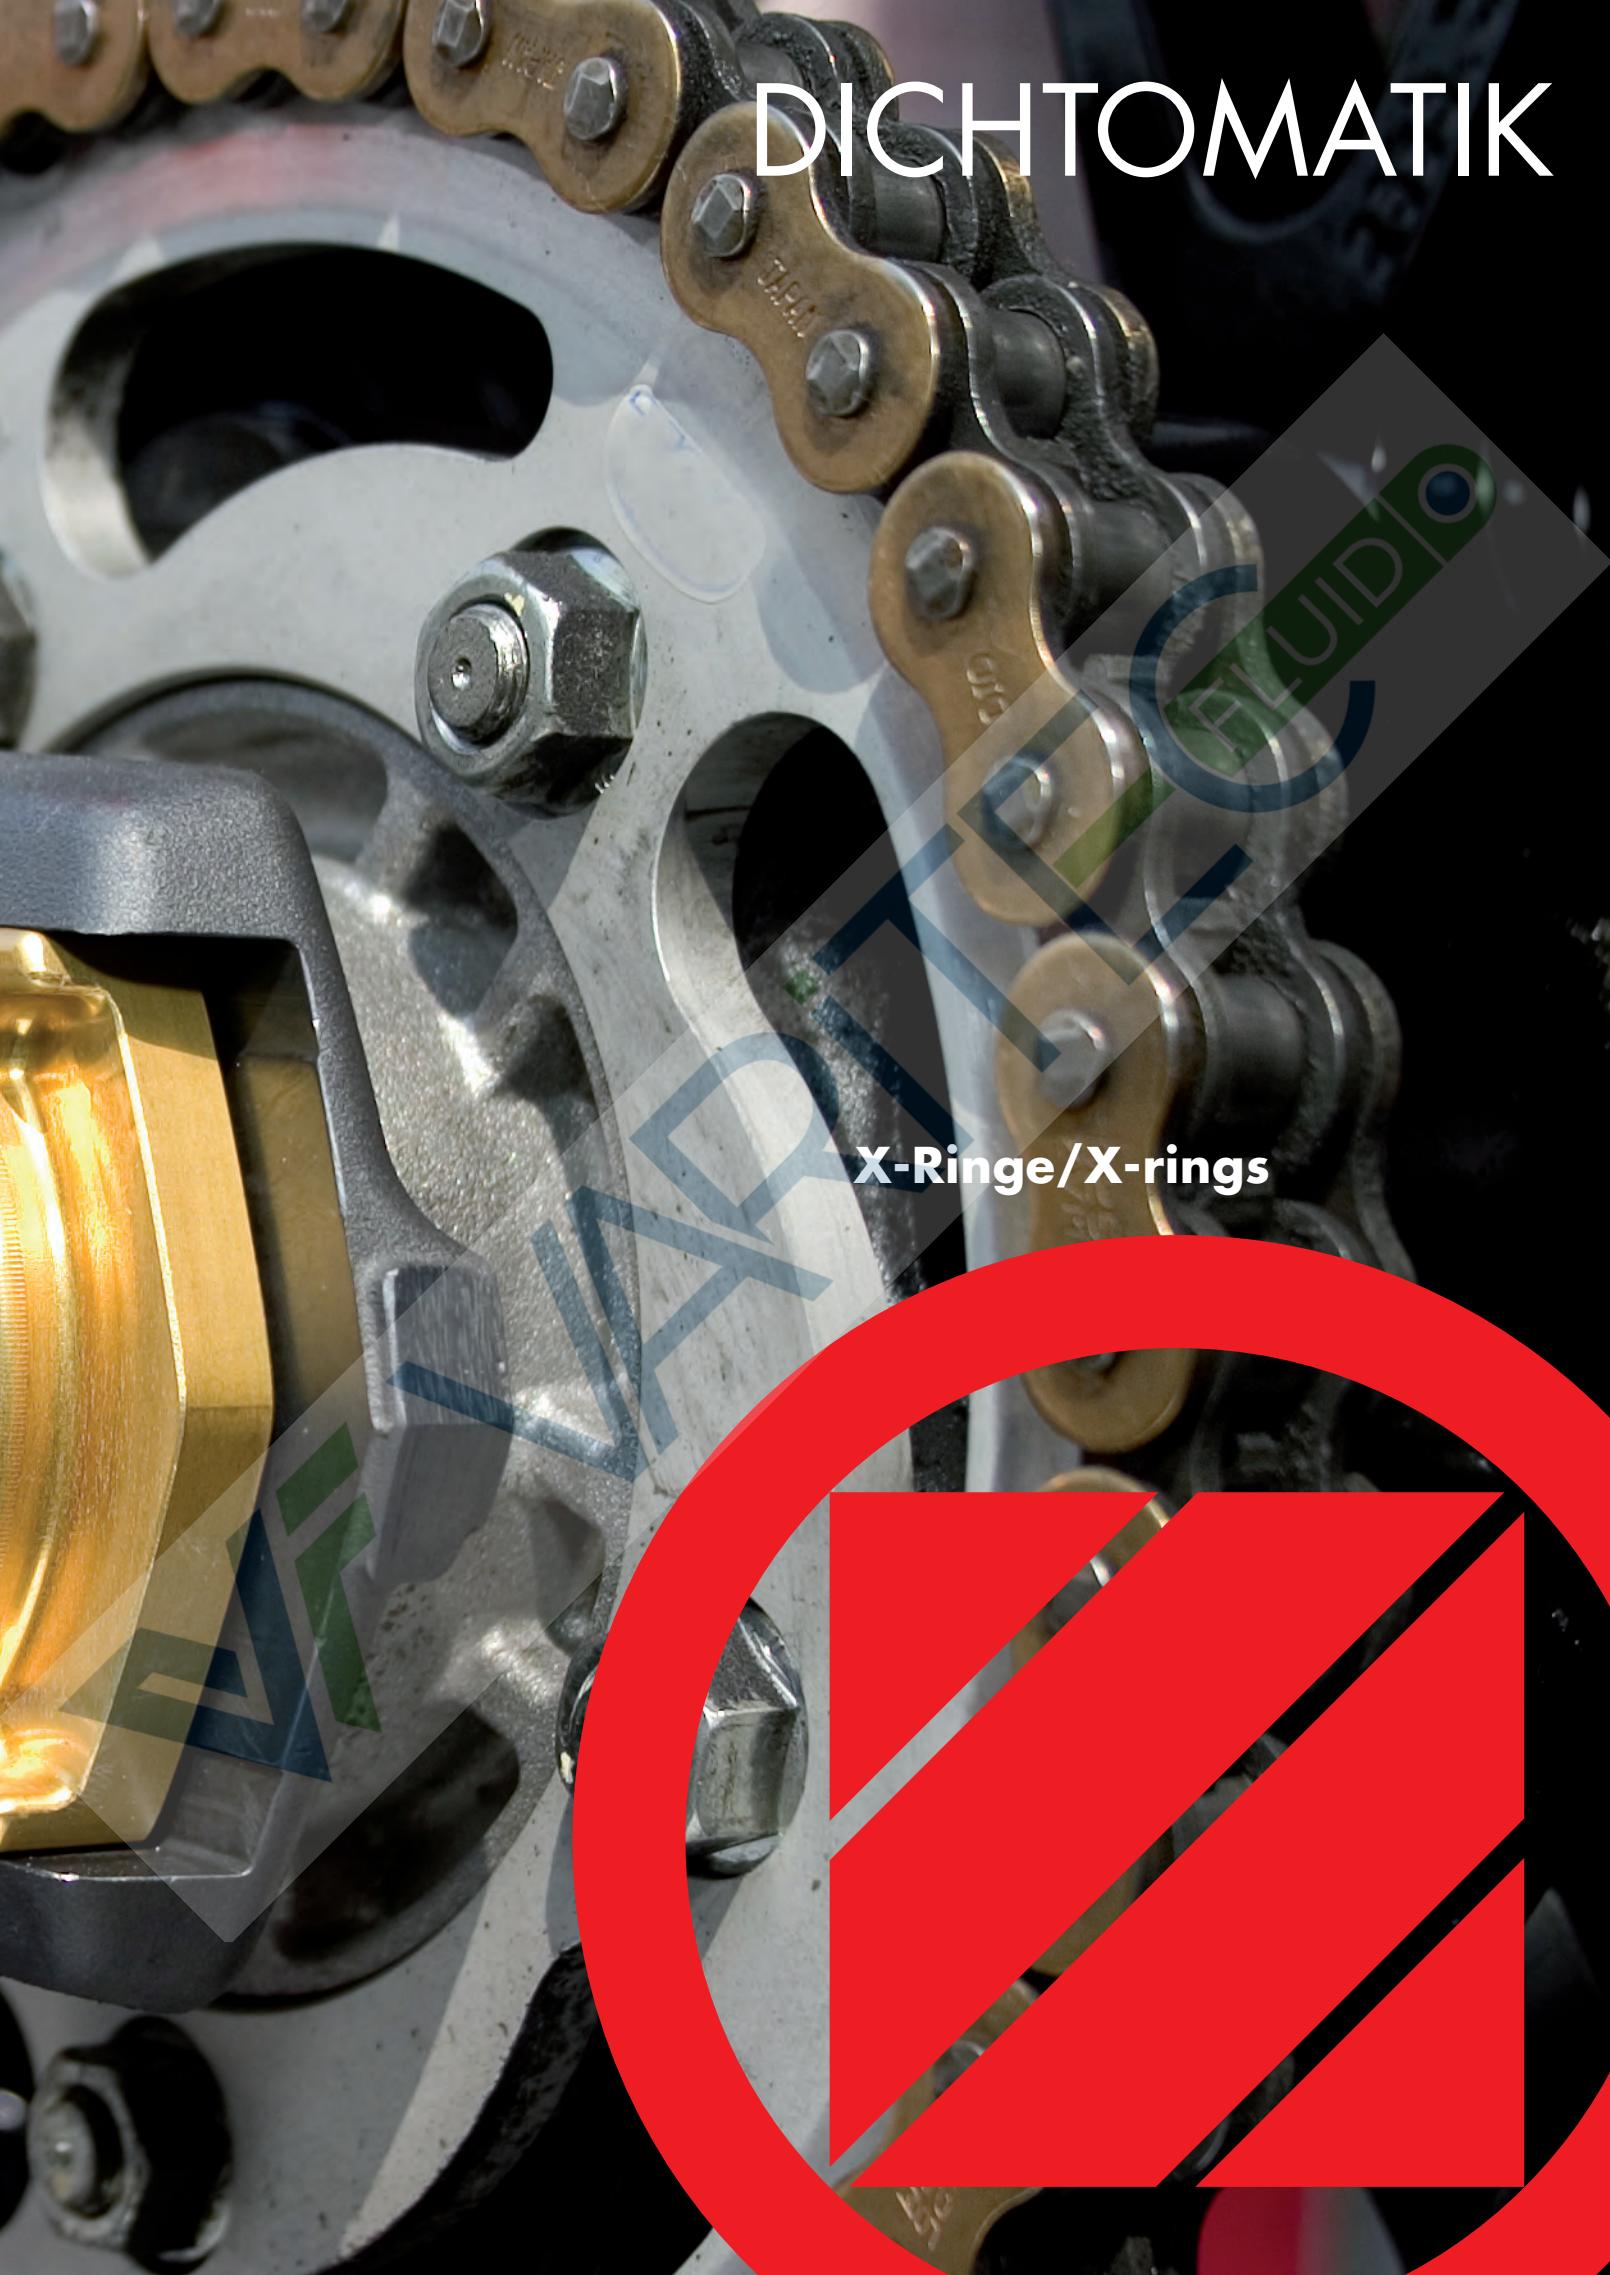



X-Ringe sind doppelt wirkende Vierlippendichtungen mit einem annähernd quadratischen Querschnittsprofil. Der X-Ring erzielt seine Dichtwirkung durch Einbau und Verpressung in einem axialen oder radialen Einbauraum. Im Betriebszustand verstärkt der Mediendruck die Dichtfunktion. Im Vergleich zu O-Ringen zeigen X-Ringe eine hohe Stabilität bei dynamischen Anwendungen, da der X-Ring aufgrund des nahezu quadratischen Querschnittes nicht zum Verdrillen neigt. Der zwischen den Dichtlippen liegende Formtrenngrat beeinträchtigt nicht die Dichtfunktion. X-Ringe benötigen eine geringe Verpressung, daraus ergibt sich eine niedrige Reibung. Zwischen den Dichtlippen kann sich ein Schmiermittelreservoir bilden, wodurch das dynamische Verhalten verbessert und das Trockenlaufrisiko reduziert wird.

Beschreibung

Baugruppe	X-Ring
Bauform	XR
Dichtwerkstoff	NBR 70 schwarz FKM 70 schwarz

Einsatzgebiet

X-Ringe sind in der Handhabung und Anwendung mit einem O-Ring vergleichbar. Sie dienen beispielsweise zur radialen und axialen statischen Abdichtung von Flanschen, Buchsen und Deckeln oder zur dynamischen Abdichtung von Kolben und Stangen, bei rotierenden Wellen und überlagerten Schraubenbewegungen. X-Ringe werden überwiegend für dynamische Einsätze verwendet, da sie geringer als O-Ringe verpresst werden müssen und somit weniger Reibung entwickeln. Sehr oft werden X-Ringe für quasistatische Einsätze verwendet, wie Stell- und Schwenkbewegungen, z.B. Rollenketten.

Betriebseinsatzgrenzen

Temperatur NBR: -30 °C bis +100 °C
Temperatur FKM: -15 °C bis +200 °C

Geschwindigkeit
translatorisch ≤ 0,5 m/s
rotatorisch ≤ 2 m/s

Druck
statisch und dynamisch bis 50 bar*

X-rings are twin-action 4-lipped seals with an almost square cross-section profile. The X-ring achieves its sealing effect by being installed and compressed within an axial or radial installation housing. Under operating conditions, the pressure of the medium reinforces the sealing function. Compared to O-rings, X-rings display high stability in dynamic applications, as the X-ring's almost square cross-section means that it does not tend to twist. The mould flash between the sealing lips does not impair the sealing function. X-rings require a lower degree of compression, resulting in less abrasion. A lubricant reservoir may form between the sealing lips, which improves the dynamic properties and reduces the risk of dry running.

Description

Product group	X-ring
Type	XR
Sealing material	NBR 70 black FKM 70 black

Applications

X-rings are comparable with O-rings in their handling and use. For example, they are used for the radial and axial static sealing of flanges, sleeves and covers and for dynamically sealing pistons and rods, for rotating shafts and helical movements.

X-rings are used primarily for dynamic applications, as they require less pre-tensioning than O-rings and therefore give rise to less abrasion. They are very often used for quasi-static applications, such as adjustment and swiveling movements, e.g. roller chains.

Operational application limits

Temperature NBR: -30 °C to +100 °C
Temperature FKM: -15 °C to +200 °C

Speed
reciprocal ≤ 0,5 m/s
rotary ≤ 2 m/s

Pressure
Static and dynamic up to 50 bar*

*at optimum housing design


*bei optimaler Einbauraumgestaltung

Layout-Richtlinien/ Layout guidelines

Um eine optimale Dichtwirkung zu erzielen, sollten X-Ringe mit einer möglichst großen Schnurstärke gewählt werden.

Verpressung

Die Dichtwirkung des X-Rings entsteht durch radiale oder axiale Verpressung im Einbauraum. Demzufolge können fertigungsbedingte Toleranzen, Setzverhalten (Druckverformungsrest) und Verschleiß überwunden werden.

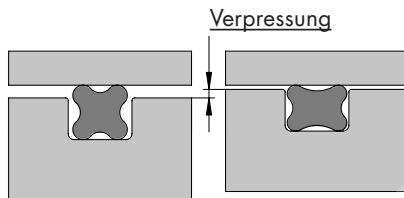

Bei statischer Anwendung sollte die mittlere Verpressung bezogen auf die Schnurstärke 10 – 25%, bei dynamischer Anwendung 8 – 20% betragen.

Dehnung und Stauchung

X-Ringe können beim Einbau in gewissen Grenzen gedehnt oder gestaucht werden, ohne dass dadurch ihre Dichtfunktion und Lebensdauer beeinträchtigt wird. Im eingebauten Zustand sollte der X-Ring, bezogen auf den Innendurchmesser, nicht mehr als 6% gedehnt werden, da es sonst zu einer unzulässig großen Querschnittsabnahme und starken Abflachung am Innenmantel kommt. Annähernd gilt gemäß der Guldinschen Regel, dass 1% Dehnung des Innendurchmessers 0,5% Schnurstärkenverringerung nach sich zieht. Die Stauchung des X-Rings sollte nicht größer als max. 3% sein, da sich der X-Ring sonst in der Nut verwerfen kann. Für axial verpresste X-Ringe ist eine Dehnung und Stauchung von bis zu 2% zu empfehlen.


Nutfüllung

Bei Kontakt mit einem aggressiven Medium kann eine Volumenquellung die Folge sein. In den Einbauraumempfehlungen Tabellen 4 bis 6 wird dieser Punkt bereits bei der Nutgestaltung berücksichtigt.

In order to achieve the best possible sealing effect, the X-rings selected should have the largest possible cross-section.

Deformation

The X-ring achieves its sealing effect by being deformed within an axial or radial installation housing. As a result, production tolerances, compression set and wear can be overcome.

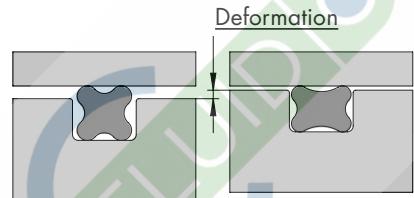

In a static application, the average deformation in relation to the cross-section should be 10 – 25% and in a dynamic application 8 – 20%.

Stretching and compression

X-rings can be stretched or compressed to certain limits while being installed without this affecting their sealing function and service life. The installed X-ring should not be stretched by more than 6% in relation to the inside diameter as this could lead to an unacceptably large reduction of the cross-sectional area, and also considerably level off the inner sleeve. According to the rules of Guldinus, a 1% expansion of the inside diameter leads to an approximately 0.5% reduction in cross-section. The compression of the X-ring should not exceed 3%, as the X-ring could otherwise distort in the groove. For axially compressed X-rings, stretching and compression of up to 2% is recommended.

Groove filling


Contact with an aggressive medium may result in an increase in volume. This point is already taken into account for groove design in the installation housing recommendations, Table 4 to 6.

Konstruktionsrichtlinien/ Design guidelines

Für eine funktionsgerechte Anwendung müssen folgende Details beachtet werden:

Alle mit dem X-Ring in Kontakt kommenden Kanten und Übergänge von Bauteilen müssen komplett entgratet, gerundet und gegebenenfalls poliert werden.

Der Übergang von der Nutflanke zum Nutgrund r_2 und der Übergang von der Nutflanke zur Bauteiloberfläche r_1 muss leicht abgerundet sein. Die auf die Schnurstärke bezogenen Radien entnehmen Sie aus Tabelle 1.

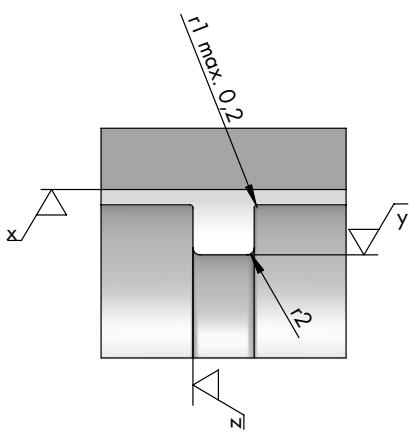

gratfrei gerundet, poliert/burr-free,
rounded and polished

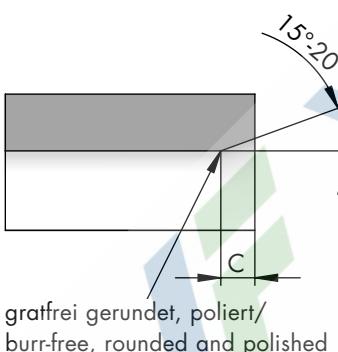
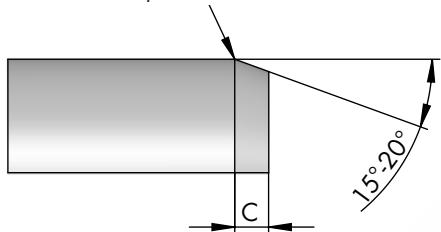


Tabelle 1:

Nutgrundradius r_2	Radius
Schnurstärke W	r_2
1,02	0,1
1,27	0,15
1,52	0,2
1,78	0,2
2,62	0,3
3,53	0,4
5,33	0,6
7	0,6

Einführschrägen

Um Beschädigungen am X-Ring zu vermeiden und eine fachgerechte Montage zu ermöglichen, sind kanten gerundete Einführschrägen vorzusehen. Der Winkel zwischen Einführschräge und Gerade sollte 15° bis 20° betragen. Die Länge C der Einführschräge ist in der Tabelle 2 dargestellt. Die Oberflächengüte der Einführschräge ist mit $R_a \leq 0,8 \mu\text{m}$, $R_z \leq 6,3 \mu\text{m}$ auszuführen.

Tabelle 2:

Einführungschrägen C min.	Einführschräge C min.
Schnurstärke W	
≤ 1,8	2,5
≤ 2,65	3
≤ 3,55	3,5
≤ 5,33	4,5
≤ 7	5

The following details must be observed to ensure a correct function:

Any component edges and transition points that come into contact with the X-ring should be burr-free, rounded and polished if necessary.

The transition point between the groove flank and groove base r_2 and the transition between the groove flank and component surface r_1 must be slightly rounded. The radii relating to the cross-section are given in Table 1.

Table 1:

Groove base radius r_2

Cross-section W	Radius r_2
1.02	0.1
1.27	0.15
1.52	0.2
1.78	0.2
2.62	0.3
3.53	0.4
5.33	0.6
7	0.6

Lead-in chamfers

Lead-in chamfers with rounded edges should be used to prevent damage to the X-ring and ensure correct installation. The angles between the lead-in chamfers and the level should be between 15° and 20°. The chamfer length C is given in Table 2. The surface quality of the lead-in chamfer must be $R_a \leq 0,8 \mu\text{m}$, $R_z \leq 6,3 \mu\text{m}$.

Table 2:

Lead-in chamfers C min.

Cross-section W	Lead-in chamfer C min.
≤ 1,8	2,5
≤ 2,65	3
≤ 3,55	3,5
≤ 5,33	4,5
≤ 7	5

Oberflächengüte

Die Oberflächengüte muss dem Einsatzfall angepasst werden. Grundsätzlich muss deshalb bei dynamischer Anwendung die Oberfläche feiner sein als bei einer statischen. Gleiches gilt auch bei pulsierenden Drücken, siehe Tabelle 3.

Konzentrische und spiralförmige Riefen, Lunker, Kratzer oder andere ungünstige Bearbeitungsriefen auf der Oberfläche sind zu vermeiden. Die Rauheitswerte werden nach DIN EN ISO 4288 mit verschiedenen Kennwerten klassifiziert. Die Angabe des Mittlerrauwert R_a reicht in der Praxis für die Klassifizierung der Oberflächengüte in vielen Fällen nicht aus. Deswegen werden die gemittelte Rauheit R_z und der Traganteil t_p mit angegeben. Der Traganteil t_p sollte möglichst größer als 50% sein.

Tabelle 3: Oberflächengüte

	Beanspruchungsart/Oberfläche/Surface Kind of stressing	$R_a[\mu\text{m}]$	$R_z[\mu\text{m}]$
statisch/ static	Gegenlauffläche/counter surface x	$\leq 1,6^*$	$\leq 6,3$
	Nutgrund/groove ground y	$\leq 3,2$	≤ 10
	Nutflanke/groove shoulder z	$\leq 6,3$	$\leq 12,5$
dynamisch/ dynamic	Gegenlauffläche/counter surface x	$\leq 0,4$	$\leq 1,6$
	Nutgrund/groove ground y	$\leq 1,6$	$\leq 6,3$
	Nutflanke/groove shoulder z	$\leq 3,2$	$\leq 6,3$

*bei pulsierenden Drücken $R_a \leq 0,8$
*at pulsating pressure $R_a \leq 0,8$

Dichtspalt

Die zulässigen Werte für den Dichtspalt s sind vom Druck, der Werkstoffhärte und der Schnurstärke abhängig und aus den Tabellen 4 und 6 zu entnehmen. Der abzudichtende Spalt sollte so gering wie möglich sein. Es sind deshalb die in den Einbauraumtabellen und -zeichnungen angegebenen Passungen und Toleranzen einzuhalten.

Dabei ist zu berücksichtigen, dass es unter Arbeitslast, zum Beispiel bei einem Zylinderrohr unter hohem Druck, zu einer Erweiterung des Dichtspalts kommen kann. Bei zu großen Dichtspalten besteht die Gefahr der Spaltextrusion. Das heißt, der X-Ring wandert bei Druckbeanschlagung in den Spalt ein und wird dabei nach einiger Zeit zerstört.

Surface quality

The surface quality must be adapted to the particular application. For dynamic applications the surface must therefore be finer than for static applications. The same also applies to pulsating pressures, see Table 3. Concentric and helical marks, holes, scratches or other unfavourable processing marks on the surface are to be avoided. Roughness values are classified in accordance with DIN EN ISO 4288 with various parameters. In many cases, simply stating the average roughness value R_a is not sufficient to classify the surface quality. This is why the average roughness depth R_z and the contact area percentage t_p are also given. The contact area percentage t_p should be more than 50% if possible.

Table 3: Surface quality

	$R_a[\mu\text{m}]$	$R_z[\mu\text{m}]$
Gegenlauffläche/counter surface x	$\leq 1,6^*$	$\leq 6,3$
Nutgrund/groove ground y	$\leq 3,2$	≤ 10
Nutflanke/groove shoulder z	$\leq 6,3$	$\leq 12,5$

Sealing gap

The permitted values for the sealing gap s are determined by pressure, material hardness and cross-section thickness and are given in the Tables 4 and 6. The gap to be sealed should be as small as possible. The fits and tolerances given in the installation tables and drawings should therefore be observed.

It must be taken into consideration that working loads such as those exerted on a cylindrical tube under high pressure may cause the sealing gap to expand. If the gap is too large, there is a risk of gap extrusion. This means that the X-ring migrates into the gap as pressure is applied, where it will soon be destroyed.

Einbauraum- empfehlungen/ Installation housing recommendations

Die Einbauräume (Nuten) für X-Ringe sollen nach Möglichkeit rechtwinklig eingestochen werden. Die Maße für die erforderliche Nuttiefe und Nutbreite sind abhängig von dem jeweiligen Anwendungsfall und der Schnurstärke. Die angegebenen Maße sind Empfehlungen für die entsprechende Einbauart und beziehen sich auf die Nennmaße.

Statische Abdichtung, radiale Verpressung

Bei der Abdichtung von Zapfen, Bolzen, Rohrverschraubungen oder Zylinderrohren wird diese Einbauart bevorzugt angewendet. Der X-Ring-Querschnitt wird beim Einbau radial verformt. Bei dünnwandigen, elastisch stärker verformbaren Teilen, wie z.B. einem Zylinderrohr, ist die Nut im starren Außenteil (Zylinderboden) vorzusehen, damit sich beim Aufweiten unter Innendruck der Spalt auf der druckabgewandten Seite nicht vergrößert.

Tabelle 4: Einbauraumempfehlung, statische Abdichtung, radiale Verpressung:

Schnurstärke W	Nuttiefe $t+0,05$	Nutbreite $b+0,25$	Dichtspalt s
1,02	0,75	1,2	0,03
1,27	0,9	1,4	0,03
1,52	1,15	1,7	0,04
1,78	1,4	2	0,05
2,62	2,25	3	0,08
3,53	3,1	4	0,08
5,33	4,75	6	0,1
7	6,2	8	0,1


The installation housings (grooves) for X-rings should if possible be produced with right angles. The dimensions for the required groove depth and width depend on the particular application and cross-section thickness. The dimensions are recommendations for the particular type of installation, and refer to the nominal sizes.

Static sealing, radial deformation

This type of sealing is the preferred choice for sealing pins, bolts, tube connections or cylindrical tubes. The X-ring section is deformed radially on installation. On thin-walled parts where elastic deformation could occur such as with a cylindrical pipe, the groove should be on the fixed outer part (cylinder bottom) so that the groove on the side that is not subject to pressure does not become larger as the item widens.

Table 4: Installation housing recommendation, static sealing, radial compression:

cross-section W	depth $t+0,05$	width $b+0,25$	sealing gap s
1.02	0.75	1.2	0.03
1.27	0.9	1.4	0.03
1.52	1.15	1.7	0.04
1.78	1.4	2	0.05
2.62	2.25	3	0.08
3.53	3.1	4	0.08
5.33	4.75	6	0.1
7	6.2	8	0.1

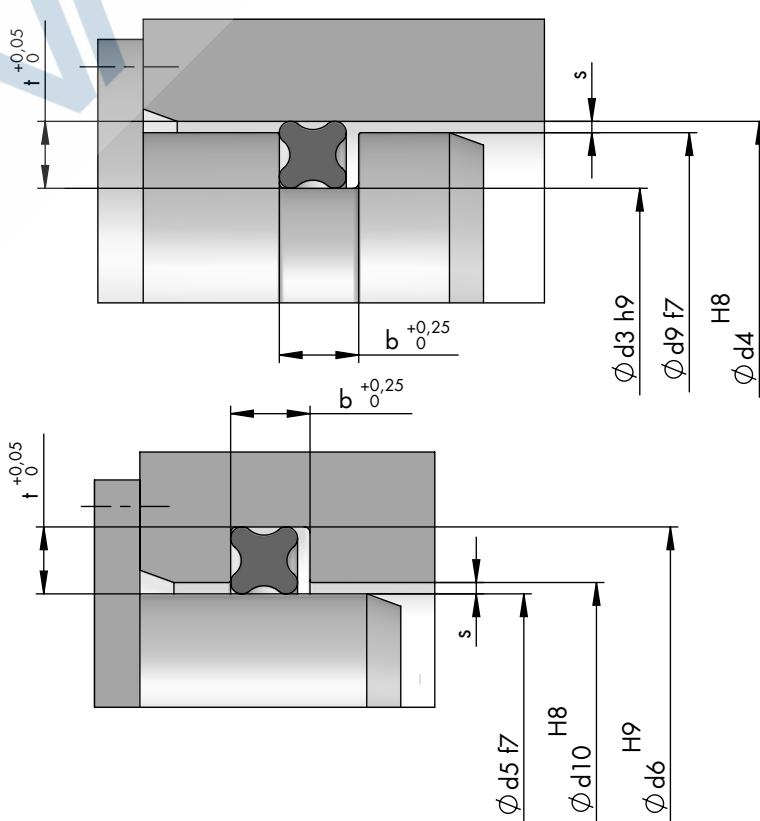

Statische Abdichtung, axiale Verpressung

Diese Einbauart wird hauptsächlich bei Flansch- und Deckelabdichtungen angewendet. Der X-Ring-Querschnitt wird axial verformt. Es ist darauf zu achten, dass der X-Ring beim Einbau an der druckabgewandten Seite der Nut anliegt um eine Bewegung in der Nut bei Druckbeaufschlagung oder schwellendem Druck zu vermeiden.

Tabelle 5: Einbauraumempfehlung, statische Abdichtung, axiale Verpressung


Schnurstärke W	Nuttiefe $t+0,05$	Nutbreite $b+0,25$
1,02	0,75	1,2
1,27	0,9	1,4
1,52	1,15	1,7
1,78	1,4	2
2,62	2,25	3
3,53	3,1	4
5,33	4,75	6
7	6,2	8

Static sealing, axial deformation


This type of installation is used primarily for flange and cover sealing. The X-ring cross section is deformed axially. Note that the X-ring should be placed against the non-pressure side of the groove upon installation in order to prevent it from moving in the groove when pressure is applied or increased.

Table 5: Installation housing recommendation, static sealing, axial compression

cross-section W	depth $t+0.05$	width $b+0.25$
1.02	0.75	1.2
1.27	0.9	1.4
1.52	1.15	1.7
1.78	1.4	2
2.62	2.25	3
3.53	3.1	4
5.33	4.75	6
7	6.2	8

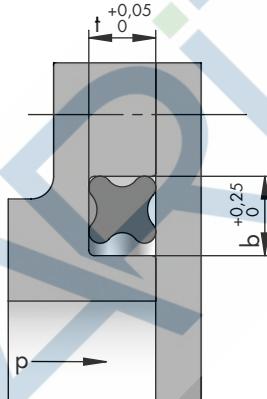

Druck von innen/
Internal pressure

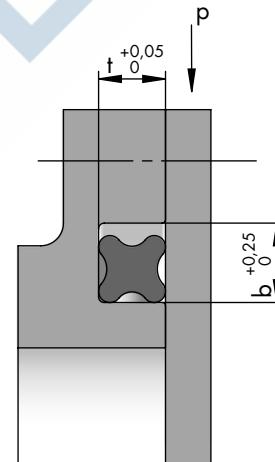

Druck von außen/
External pressure

Dynamische Abdichtung, radiale Verpressung

X-Ringe werden erfolgreich als Dichtelement bei dynamischen Einsätzen verwendet. Ihre Anwendung beschränkt sich allerdings auf eher niedrige Drücke und Geschwindigkeiten. Es sollte stets eine gute Schmierung gewährleistet sein, um Reibungsverlusten oder vorzeitigem Verschleiß des X-Rings durch Trockenlaufen vorzubeugen.

Tabelle 6: Einbauraumempfehlung, dynamische Abdichtung, radiale Verpressung


Schnurstärke W	Nuttiefe t +0,05	Nutbreite b +0,25	Dichtspalt s
1,02	0,8	1,2	0,03
1,27	1	1,4	0,03
1,52	1,25	1,7	0,04
1,78	1,5	2	0,05
2,62	2,3	3	0,08
3,53	3,2	4	0,08
5,33	4,9	6	0,1
7	6,4	8	0,1

Dynamic sealing, radial deformation

X-rings are used successfully as sealing elements in dynamic applications. However, their use is limited to lower pressures and speeds. The item should always be well lubricated in order to prevent frictional losses and premature wear of the X-ring if it runs dry.

Table 6: Installation housing recommendation, dynamic sealing, radial deformation

cross-section W	depth t +0,05	width b +0,25	sealing gap s
1.02	0.8	1.2	0.03
1.27	1	1.4	0.03
1.52	1.25	1.7	0.04
1.78	1.5	2	0.05
2.62	2.3	3	0.08
3.53	3.2	4	0.08
5.33	4.9	6	0.1
7	6.4	8	0.1

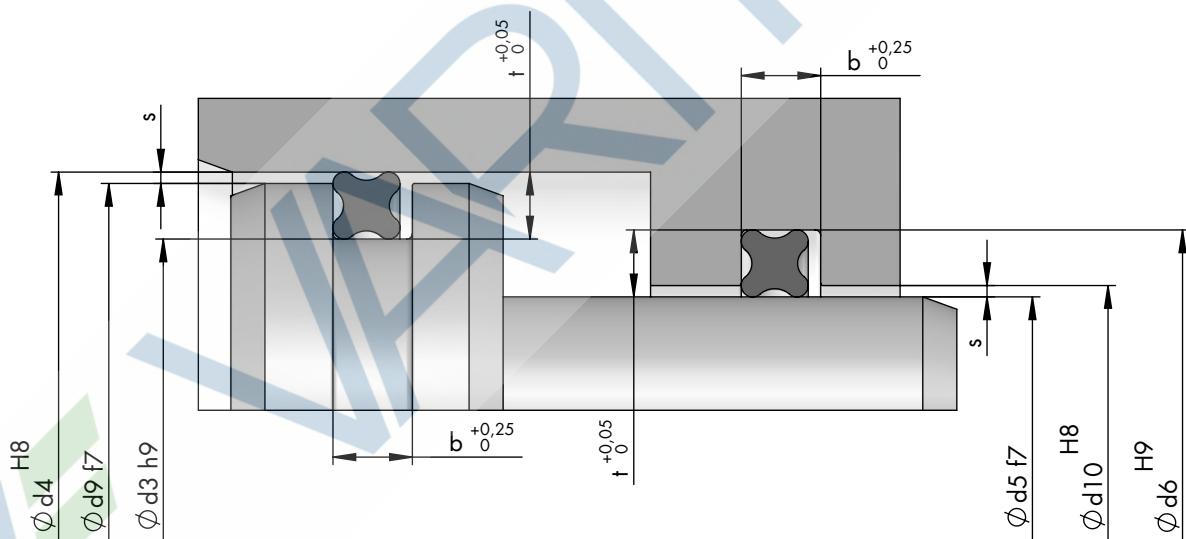


Allgemeine Hinweise zur Montage/ General installation instructions

X-Ringe aus Elastomeren sind empfindlich gegen mechanische Beanspruchung und erfordern daher eine sorgsame Behandlung. Bei der Montage müssen Beschädigungen am X-Ring vermieden werden, um Undichtigkeiten auszuschließen. Folgende Empfehlungen sollten dabei beachtet werden:

- Der X-Ring darf nicht bis an die Dehnungsgrenze aufgeweitet werden.
- Kanten über die der X-Ring geführt wird müssen grätfrei sein, Radien und Schrägen übergangslos gerundet und poliert ausgeführt werden.
- Staub, Schmutz, Metallspäne und sonstige Partikel müssen aus dem Einbauraum entfernt werden.
- Gewindespitzen und Einbauräume für andere Dicht- und Führungs-elemente sollten mit Hilfe einer Montagehülse überdeckt werden.

X-rings made of elastomers are sensitive to mechanical loads and therefore require careful treatment. Damage to the X-ring during installation must be avoided as this could cause leakage. The following recommendations should be observed:

- The X-ring must not be expanded to its elongation limit.
- Edges over which the X-ring is passed must be burr-free; radii and chamfers must be rounded seamlessly and polished.
- Dust, dirt, swarf and other particles must be removed from the installation housing.
- Tips of screws and installation housings for other sealing and guiding elements should be covered using an assembly sleeve.

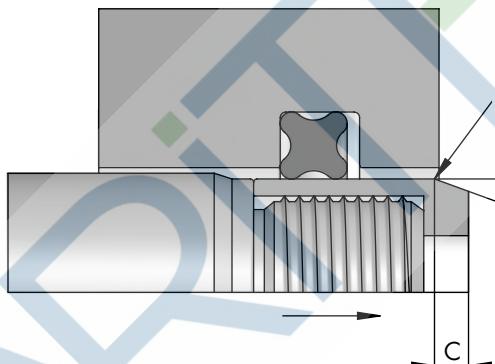

- Gegebenenfalls verwendete Montagewerkzeuge oder -hülsen sollten aus weichem Material wie z.B. Polyoxymethylen (POM) bestehen und frei von scharfen Kanten sein.
- Montageoberflächen und X-Ringe sollten zur Montageerleichterung mit einem geeigneten Öl/Fett versehnen werden. Idealerweise ist das abdichtende Medium zu verwenden.
- Das Erwärmen in Öl oder Wasser auf ca. 80°C macht Elastomere geschmeidiger, dadurch lässt sich der X-Ring leichter für die Montage aufdehnen.
- Nach Einschnappen in die Nut darf der X-Ring nicht verdrillt zum Einsatz kommen.
- X-Ringe sollten erst kurz vor dem Einsatz und nicht ungeschützt vor Umwelteinflüssen und Beschädigungen im montierten Zustand gelagert werden.

- Any assembly tools or sleeves used should be made of a soft material such as polyoxymethylene (POM) and not have any sharp edges.
- A suitable oil/grease should be applied to the assembly surfaces and X-rings to ease installation. Ideally, the medium to be sealed should be used.
- Elastomer materials are made more supple if they are heated in oil or water to approx. 80°C. This makes it easier to stretch the X-ring for assembly.
- Ensure that the X-ring is not twisted as it is slotted into the groove.
- X-rings should not be installed until shortly before use. They should not be stored unprotected against environmental influences and damage in assembled condition.

Any seal. Any time.

You will find all the current data at www.dichtomatik.de

Any seal. Any time.

Alle aktuellen Daten finden Sie unter www.dichtomatik.de

Any seal. Any time.

Deutschland/Germany

DICHTOMATIK GMBH
Albert-Schweitzer-Ring 1
D-22045 Hamburg
Postfach 70 04 80
D-22004 Hamburg
Telefon +49/40/66 98 90
Fax +49/40/66 98 91 01
mail@dichtomatik.de
www.dichtomatik.de

Niederlande/The Netherlands

DICHTOMATIK B.V.
Benjamin Franklinstraat 6
NL-8013 NC Zwolle
Postbus 40 102
NL-8004 DC Zwolle
Telefon 038/460 16 06
Fax 038/467 19 00
mail@dichtomatik.nl
www.dichtomatik.nl

Großbritannien/Great Britain

DICHTOMATIK LIMITED
Donington House
Riverside Road
Pride Park
GB-Derby DE24 8HX
Telefon 01332/52 44 00
Fax 01332/52 44 04
mail@dichtomatik.co.uk
www.dichtomatik.co.uk

Österreich/Austria

DICHTOMATIK HANDELSGES. MBH
Rautenweg 17
A-1220 Wien
Telefon 01/259 35 41-0
Fax 01/259 35 41-30
mail@dichtomatik.co.at
www.dichtomatik.co.at

Schweden/Sweden

DICHTOMATIK AB
Box 142
Hjalmar Brantingsväg 25
S-26122 Landskrona
Telefon 0418/44 98 00
Fax 0418/44 98 20
mail@dichtomatik.se
www.dichtomatik.se

Italien/Italy

DICHTOMATIK S.A.S.
Via Delle Fabbriche 6
I-16158 Genova-Voltri
Telefon 010/612 75
Fax 010/613 38 61
mail@dichtomatik.it
www.dichtomatik.it

Frankreich/France

DICHTOMATIK S.A.S.
Espace Entreprise de
Mâcon Loché TGV
F-71000 Loché
Telefon 03/85 27 02 80
Fax 03/85 35 69 37
mail@dichtomatik.fr
www.dichtomatik.fr

Ungarn/Hungary

DICHTOMATIK KFT.
Vegyész utca 17-25
H-1116 Budapest
Telefon 01/802 64 00
Fax 01/802 64 10
sales@dichtomatik.hu
www.dichtomatik.hu

USA/USA

DICHTOMATIK North America
1087 Park Place
USA-Shakopee, Minnesota 55379
Telefon 1 800 328 2840
Fax 1 877 777 6869
sales@dichtomatik.us
www.dichtomatik.us

Kanada/Canada

DICHTOMATIK Canada
950 Denison Street Unit 21
CDN-Markham, Ontario L3R3K5
Telefon 905/470 22 66
Fax 905/470 20 55
sales@dichtomatik.ca
www.dichtomatik.ca

Brasilien/Brazil


Division Dichtomatik Brazil
Freudenberg-Nok
Componentes Brazil Ltda.
Av. Piraporinha, 411
BR-Diadema 09950-902 SP
Telefon 11/33 63 80 80
Fax 11/33 63 80 81
vzg@fnfp.com

Mexiko/Mexico

International Seal De Mexico
S.A. De Cv.
Av. De Las Misiones No. 1 Int. 5
Fracc. Ind. Bernardo Quintana
MEX-El Marques., Queretaro 76246
Telefon 442/221 63 03
Fax 442/221 63 27
efenton@dichtomatikmex.com
www.dichtomatikmex.com

China/China

Dichtomatik (China) Co., Ltd
Add: No.314 Shenxia Road
Jiading District,
Shanghai 201818
Telefon 021/60 82 21 78
Fax 021/60 82 21 80
mail@dichtomatik.cn
www.dichtomatik.com

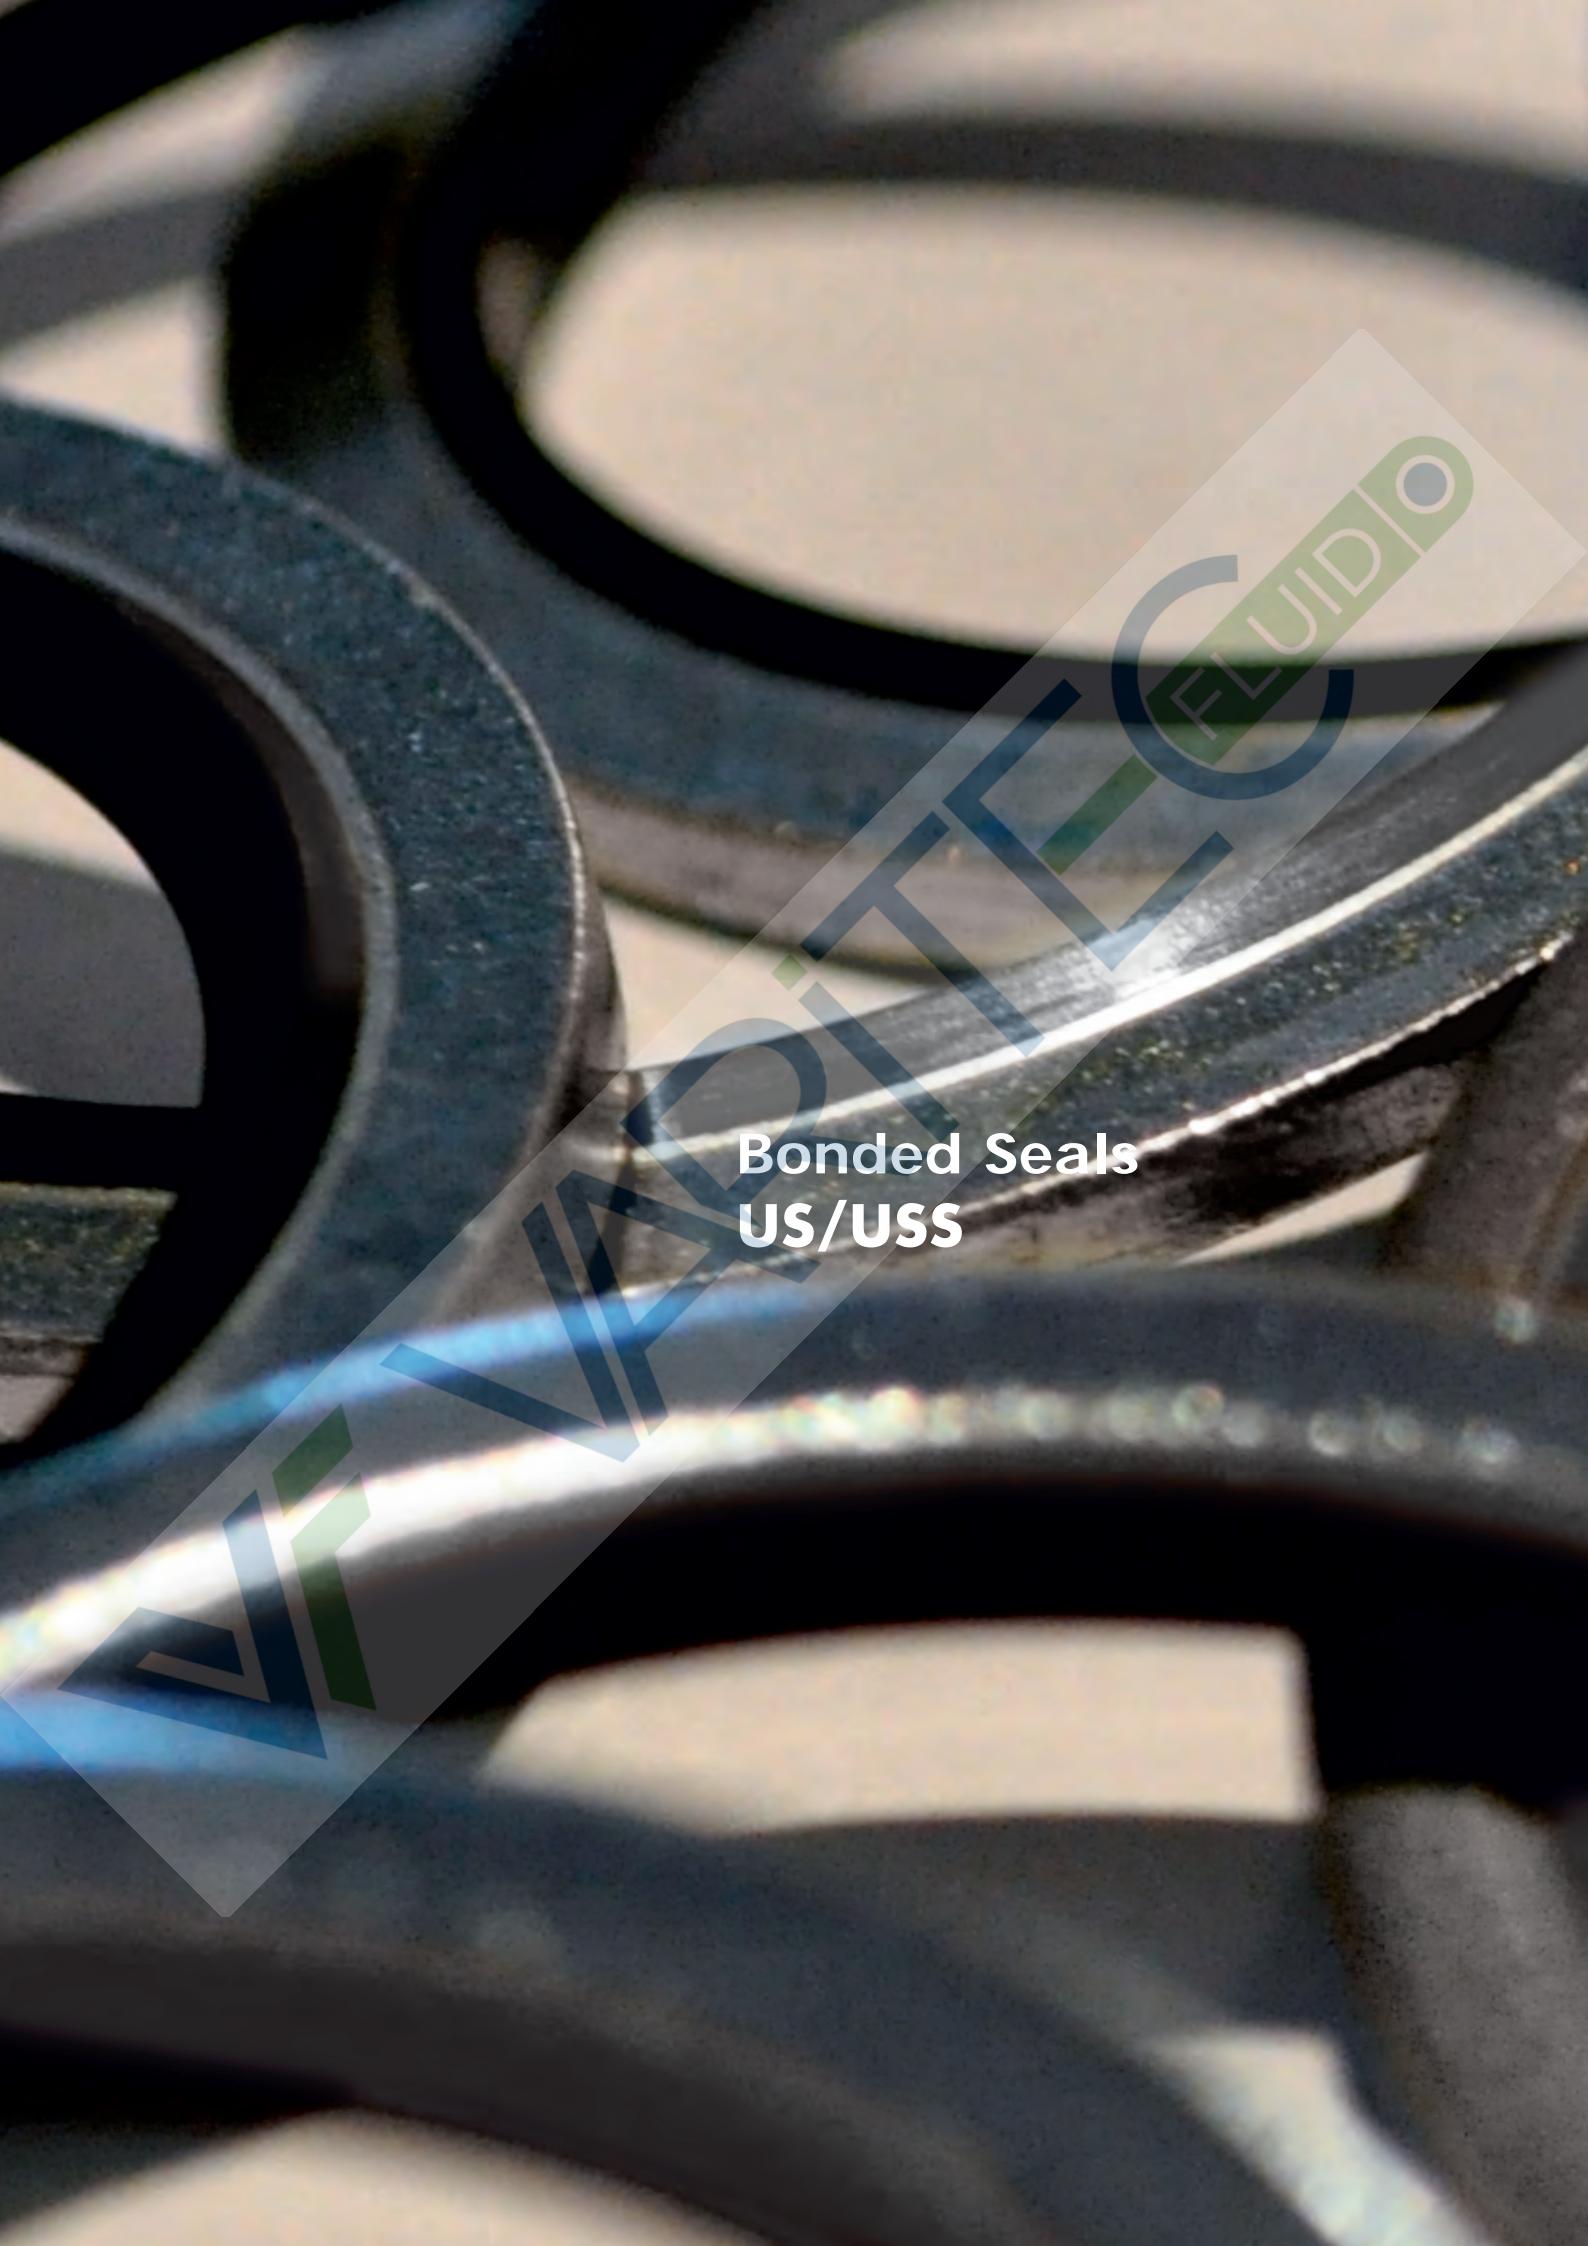


**Bonded Seals
US/USS**



US/USS

Bonded seals (US, USS) are metal washers with a trapezoidal elastomer sealing lip vulcanised to their inner diameter.



Description

Product group	Bonded seal
Type	US with inner vulcanised elastomer sealing lip
	USS with inner vulcanised elastomer sealing lip and additional centring
Sealing material	Elastomer sealing lip NBR, NB 70 34 09 Elastomer sealing lip FKM, FP 70 34 02
Colour	NBR 70, black FKM 70, brown
Washer	Carbon steel SAE 1008 (1.0330) Stainless steel AISI 304 (1.4301)
Surface protection	Zinc plated washer carbon steel (Cr VI free)
Colour	Silver-grey

Operational application limits

Temperature NBR: -30°C to +100°C
Temperature FKM: -15°C to +200°C

The maximum operating pressure is dependent on the design of the seal, the material, the dimensions, the counter surface and the tightening torque. Bonded seals are suitable for up to 25 Mpa pressure without counterbores in the counter surfaces.

Counter surface

Surface finish
 $R_{max} \leq 15 \mu m$
 $R_a \leq 3.2 \mu m$


Function

By tightening the screws the elastomer sealing lip is compressed, thereby producing the sealing effect on the surfaces to be sealed. It stops the medium from leaking to the outside, thus preventing loss of pressure. In addition, it provides protection against dirt from the outside.

The centring feature of the USS type ensures that the bonded seal is fixed in the correct position for mounting and when tightening the screws, thereby guaranteeing captive mounting.

Application area

Bonded seals are used as static seals for screw connections and flange seals, for example in machine building and container and apparatus construction.

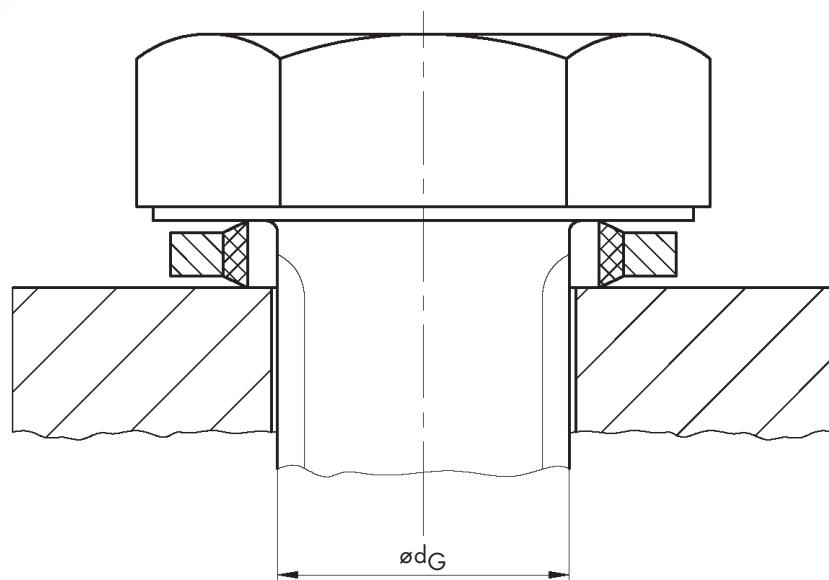



Benefits of bonded seals

Simple, captive assembly
Secure sealing
Reusable
Fixation due to inner centring
Cost-effective solution
Controlled compression due to washer
Available in different metal finishes
Stocked for almost all European
thread sizes

Remarks

Further special types such as bonded seals with elastomer sealing lip vulcanised to the outside (UA type) or according to customers' drawings are available on request.

Further elastomer materials such as EPDM, HNBR and FVMQ are available on request. We can also provide the metal washer in different special steels such as AISI 316 (1.4401) or AISI 316Ti (1.4571) on request in order to guarantee improved corrosion and acid resistance.


Any Seal. Any Time

All the articles in our standard range can be ordered direct from our warehouse. You can check availability at www.dichtomatik.de. Other dimensions can be manufactured or tools are already in place.

General information

Height tolerance (S)

1	± 0.1
1.2	± 0.1
1.5	± 0.1
2	± 0.1
2.3	± 0.15
2.5	± 0.15
3	± 0.15
3.2	± 0.15
3.5	± 0.15

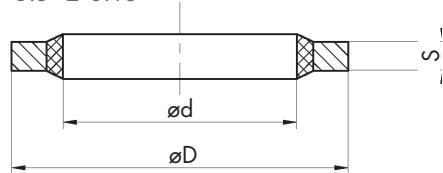


Media suitability of elastomer sealing lip

NBR

Good chemical resistance to mineral oils and greases, hydraulic oils H, HL, HLP, flame-resistant hydraulic fluids HFA, HFB, HFC up to approx. +50°C and water up to max. +80°C.


FKM

Good chemical resistance to mineral oils and greases, synthetic oils and greases, engine, transmission and ATF oils up to approx. +150°C, fuels, flame-resistant hydraulic fluids HFD, aliphatic, aromatic and chlorinated hydrocarbons, water up to max. +80°C, excellent resistance to weather, ozone and ageing, very low gas permeability (therefore suitable for vacuum applications), broad chemical resistance.

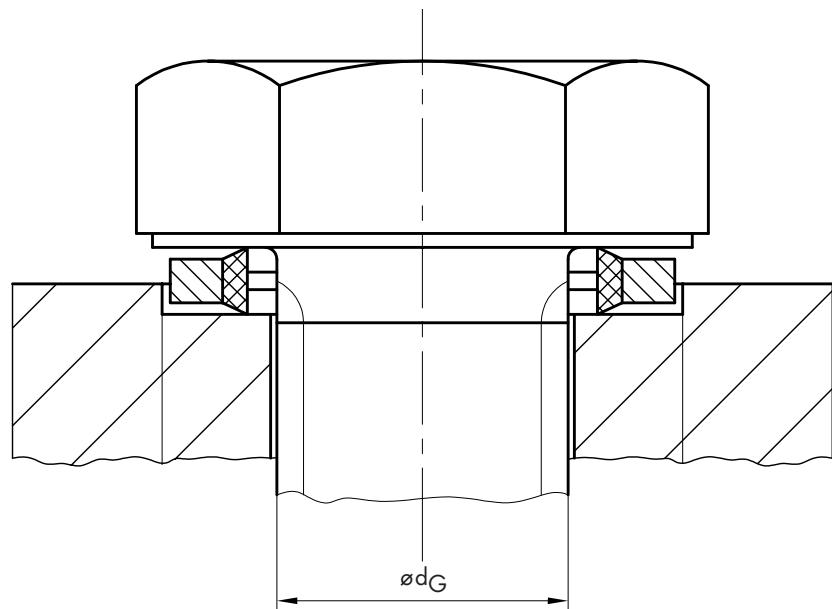

US


Ref. No.	Thread metric	Item No.	Code	d	D	S	Mat.
-------------	------------------	----------	------	---	---	---	------

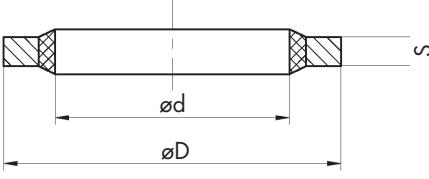Sizes								
	301	M3	68934	US	3.6	7.5	1	NBR
	301	M3	175060	US	3.6	7.5	1	FKM
		M3	175013	US	3.6	6.5	1	NBR
		M3	175007	US	3.6	6.5	1	FKM
		M3	167491	US	3.8	7.6	1	NBR
								
	201	M3	175001	US	3.8	7.6	1	FKM
	201	M3.5	24707	US	4.1	7.2	1	NBR
	201	M3.5	104541	US	4.1	7.2	1	FKM
	202	M4	68905	US	4.5	7	1	NBR
	202	M4	104543	US	4.5	7	1	FKM
	302	M4	68935	US	4.6	9	1	NBR
	302	M4	104544	US	4.6	9	1	FKM
		M4	175008	US	5.1	7.8	1	NBR
		M4	175002	US	5.1	7.8	1	FKM
	303	M5	68936	US	5.6	10	1	NBR
	303	M5	104546	US	5.6	10	1	FKM
	204	M5	36060	US	5.7	10	1	NBR
	204	M5	104548	US	5.7	10	1	FKM
	203	M5	68906	US	5.7	9	1	NBR
	203	M5	104547	US	5.7	9	1	FKM
		M5	76638	US	5.7	9.2	1	NBR
		M5	175061	US	5.7	9.2	1	FKM
		M5	175012	US	6	13	1	NBR
		M5	175006	US	6	13	1	FKM
	205	M5.5	69181	US	6.2	9.2	1	NBR
	205	M5.5	104549	US	6.2	9.2	1	FKM
	304	M6	68937	US	6.6	11	1	NBR
	304	M6	104550	US	6.6	11	1	FKM
	208	M6	69183	US	6.7	11	2.5	NBR
	208	M6	104553	US	6.7	11	2.5	FKM
	207	M6	36059	US	6.7	11	1	NBR
	207	M6	104552	US	6.7	11	1	FKM
	206	M6	65026	US	6.7	10	1	NBR
	206	M6	104551	US	6.7	10	1	FKM
	305	M6	69202	US	6.85	13.27	1.2	NBR
	305	M6	104554	US	6.85	13.27	1.2	FKM
	306	M6	68938	US	7	11.4	1	NBR
	306	M6	104557	US	7	11.4	1	FKM
	209	M6.5	69184	US	7.1	12	1	NBR
	209	M6.5	104558	US	7.1	12	1	FKM
	210	M6.7	39489	US	7.3	1.2	1	NBR
	210	M6.7	104559	US	7.3	10.2	1	FKM
			175011	US	7.8	14.9	1	NBR
			175005	US	7.8	14.9	1	FKM
	211	M8	68907	US	8.5	13.4	1	NBR
	211	M8	104562	US	8.5	13.4	1	FKM
	307	M8	56719	US	8.6	13	1	NBR
	307	M8	104563	US	8.6	13	1	FKM
	214	M8	69185	US	8.7	16	1	NBR
	214	M8	104567	US	8.7	16	1	FKM
	213	M8	68908	US	8.7	14	1	NBR
	213	M8	104566	US	8.7	14	1	FKM
	212	M8	38660	US	8.7	13	1	NBR
	212	M8	104565	US	8.7	13	1	FKM
	215	M8.5	35453	US	9.3	13.3	1	NBR

US	Ref. No.	Thread metric	Item No.	Code	d	D	S	Mat.
Sizes	215	M8.5	104568	US	9.3	13.3	1	FKM
	216	M10	44738	US	10.35	16	2	NBR
	216	M10	104569	US	10.35	16	2	FKM
	310	M10	40576	US	10.7	17	1.5	NBR
	310	M10	104573	US	10.7	17	1.5	FKM
	218	M10	36061	US	10.7	18	1.5	NBR
	218	M10	104574	US	10.7	18	1.5	FKM
	217	M10	44013	US	10.7	16	1.5	NBR
	217	M10	104572	US	10.7	16	1.5	FKM
	219	M11	69186	US	11.4	16.3	1.5	NBR
	219	M11	104576	US	11.4	16.3	1.5	FKM
	312	M11	68939	US	11.8	18.1	1.5	NBR
	312	M11	104578	US	11.8	18.1	1.5	FKM
	221	M11	44739	US	11.8	19.1	1.5	NBR
	221	M11	104580	US	11.8	19.1	1.5	FKM
	220	M11	24710	US	11.8	18.5	1.5	NBR
	220	M11	104579	US	11.8	18.5	1.5	FKM
	313	M12	68940	US	12.7	19	1.5	NBR
	313	M12	104582	US	12.7	19	1.5	FKM
	223	M12	55948	US	12.7	20	1.5	NBR
	223	M12	104583	US	12.7	20	1.5	FKM
	222	M12	35454	US	12.7	18	1.5	NBR
	222	M12	104581	US	12.7	18	1.5	FKM
		M12	175009	US	13.2	18	1.5	NBR
		M12	175003	US	13.2	18	1.5	FKM
	225	M13	69188	US	13.7	22	1.5	NBR
	225	M13	104585	US	13.7	22	1.5	FKM
	224	M13	69187	US	13.7	20	1.5	NBR
	224	M13	104584	US	13.7	20	1.5	FKM
	315	M13	69189	US	13.8	20.1	1.5	NBR
	315	M13	104587	US	13.8	20.1	1.5	FKM
	226	M13.5	35455	US	14	18.7	1.5	NBR
	226	M13.5	104589	US	14	18.7	1.5	FKM
	316	M14	68941	US	14.7	21	1.5	NBR
	316	M14	104590	US	14.7	21	1.5	FKM
	227	M14	39320	US	14.7	22	1.5	NBR
	227	M14	104591	US	14.7	22	1.5	FKM
	228	M15	69190	US	16	22.7	1.5	NBR
	228	M15	104594	US	16	22.7	1.5	FKM
	317	M16	68942	US	16.7	23	1.5	NBR
	317	M16	175062	US	16.7	23	1.5	FKM
	229	M16	24709	US	16.7	24	1.5	NBR
	229	M16	104597	US	16.7	24	1.5	FKM
	319	M16.5	69203	US	17.2	23.9	2	NBR
	319	M16.5	104598	US	17.2	23.9	2	FKM
	318	M17	49364	US	17.4	23.7	1.5	NBR
	318	M17	104601	US	17.4	23.7	1.5	FKM
	230	M17	35894	US	17.4	24	1.5	NBR
	230	M17	104602	US	17.4	24	1.5	FKM
	231	M17.5	24708	US	18	24.7	1.5	NBR
	231	M17.5	104603	US	18	24.7	1.5	FKM
	320	M18	68943	US	18.7	27	2	NBR
	320	M18	104606	US	18.7	27	2	FKM
	232	M18	44014	US	18.7	26	1.5	NBR
	232	M18	104605	US	18.7	26	1.5	FKM

US

Ref. No.	Thread metric	Item No.	Code	d	D	S	Mat.
-------------	------------------	----------	------	---	---	---	------

Sizes

321	M18	175010	US	19.7	26	1.5	NBR
321	M20	40577	US	20.7	29	2	NBR
321	M20	104609	US	20.7	29	2	FKM
233	M20	44015	US	20.7	28	1.5	NBR
233	M20	104608	US	20.7	28	1.5	FKM
234	M21	63951	US	21.5	28.7	2.5	NBR
234	M21	104610	US	21.5	28.7	2.5	FKM
323	M21	69317	US	21.7	30	2	NBR
323	M21	104613	US	21.7	30	2	FKM
235	M22	69191	US	22.5	28	1.5	NBR
235	M22	104614	US	22.5	28	1.5	FKM
324	M22	68944	US	22.7	31	2	NBR
324	M22	104617	US	22.7	31	2	FKM
237	M22	68909	US	22.7	30	3	NBR
237	M22	104616	US	22.7	30	3	FKM
236	M22	37698	US	22.7	30	2	NBR
236	M22	104615	US	22.7	30	2	FKM
325	M23	69192	US	23.7	32	2	NBR
325	M23	104619	US	23.7	32	2	FKM
326	M24	68945	US	24.7	33	2	NBR
326	M24	104622	US	24.7	33	2	FKM
238	M24	35893	US	24.7	32	2	NBR
238	M24	104621	US	24.7	32	2	FKM
239	M26	37654	US	26.7	35	2	NBR
239	M26	104623	US	26.7	35	2	FKM
327	M26	69193	US	27	35.3	2	NBR
327	M26	104624	US	27	35.3	2	FKM
240	M27	38094	US	27.2	36	2	NBR
240	M27	104626	US	27.2	36	2	FKM
	M24	69233	US	27.3	32.6	2	NBR
	M24	104628	US	27.3	32.6	2	FKM
328	M27	44419	US	27.7	36	2	NBR
328	M27	104629	US	27.7	36	2	FKM
329	M28	69194	US	28.6	36	2	NBR
329	M28	104631	US	28.6	36	2	FKM
241	M28	24711	US	28.7	37	2	NBR
241	M28	104632	US	28.7	37	2	FKM
330	M28.5	69195	US	29.2	37.5	2	NBR
330	M28.5	104633	US	29.2	37.5	2	FKM
331	M30	40578	US	30.7	39	2	NBR
331	M30	104635	US	30.7	39	2	FKM
242	M30	24706	US	31	39	2	NBR
242	M30	104637	US	31	39	2	FKM
243	M33	38392	US	33.7	42	2	NBR
243	M33	104332	US	33.7	42	2	FKM
244	M33	39367	US	34.3	43	2	NBR
244	M33	104642	US	34.3	43	2	FKM
245	M36	44918	US	36.7	46	2	NBR
245	M36	104644	US	36.7	46	2	FKM
333	M36	56720	US	37	48	2.5	NBR
333	M36	104645	US	37	48	2.5	FKM
246	M39	35892	US	40	51	2.5	NBR
246	M39	104334	US	40	51	2.5	FKM
247	M42	44937	US	42.7	53	3	NBR

US

Ref. No.	Thread metric	Item No.	Code	d	D	S	Mat.
-------------	------------------	----------	------	---	---	---	------

Sizes

247	M42	104647	US	42.7	53	3	FKM
335	M42	68946	US	43	54	2.5	NBR
335	M42	104650	US	43	54	2.5	FKM
336	M45	68947	US	46	57	2.5	NBR
336	M45	104652	US	46	57	2.5	FKM
248	M48	44016	US	48.7	59	3	NBR
248	M48	104655	US	48.7	59	3	FKM
337	M48	44420	US	49	60	2.5	NBR
337	M48	104656	US	49	60	2.5	FKM
249	M51	69196	US	52	60	3	NBR
249	M51	104658	US	52	60	3	FKM
250	M52	69197	US	53.3	64.5	3	NBR
250	M52	104659	US	53.3	64.5	3	FKM
251	M60	69198	US	60.7	73	3	NBR
251	M60	104664	US	60.7	73	3	FKM
252	M68	69199	US	68.6	79.5	3.5	NBR
252	M68	104667	US	68.6	79.5	3.5	FKM
253	M75	69200	US	76.08	90.3	3.5	NBR
253	M75	104669	US	76.08	90.3	3.5	FKM
254	M88	55921	US	89.09	101.35	3.2	NBR
254	M88	104670	US	89.09	101.35	3.2	FKM
255	M125	69201	US	127	143.67	5	NBR
255	M125	104671	US	127	143.67	5	FKM

Ref. No.	Thread imperial	BSP	Item No.	Code	d	D	S	Mat.
001	6BA		68910	US	3.05	6.35	1.2	NBR
001	6BA		104539	US	3.05	6.35	1.2	FKM
002	4BA		68911	US	4.12	7.26	1.2	NBR
002	4BA		104542	US	4.12	7.26	1.2	FKM
003	2BA		62598	US	5.21	8.38	1.2	NBR
003	2BA		104545	US	5.21	8.38	1.2	FKM
004	1/4		44934	US	6.86	13.21	1.2	NBR
004	1/4		104555	US	6.86	13.21	1.2	FKM
005	1/4		68912	US	6.99	13.34	1.2	NBR
005	1/4		104556	US	6.99	13.34	1.2	FKM
006	5/16		68913	US	8.31	13.34	1.2	NBR
006	5/16		104561	US	8.31	13.34	1.2	FKM
007	5/16		39318	US	8.64	14.22	1.2	NBR
007	5/16		104564	US	8.64	14.22	1.2	FKM
008	40		68914	US	11.26	18.36	2	NBR
008	40		104575	US	11.26	18.36	2	FKM
009	7/16		68915	US	11.69	19.05	2	NBR
009	7/16		104577	US	11.69	19.05	2	FKM
010	9/16		68916	US	14.86	22.23	2	NBR
010	9/16		104592	US	14.86	22.23	2	FKM
011	5/8		68918	US	16.51	25.4	2	NBR
011	5/8		104595	US	16.51	25.4	2	FKM
012	11/16		68919	US	18.16	25.4	2.3	NBR
012	11/16		104604	US	18.16	25.4	2.3	FKM
013	15/16		68922	US	24.26	33.27	2.3	NBR

US

Ref. No.	Thread imperial BSP	Item No.	Code	d	D	S	Mat.
-------------	---------------------------	----------	------	---	---	---	------

Sizes	013	15/16	104620	US	24.26	33.27	2.3	FKM	
	014	1 1/8	68924	US	29.33	36.58	2.3	NBR	
	014	1 1/8	104634	US	29.33	36.58	2.3	FKM	
	015	1 1/4	68925	US	32.64	41.4	3.2	NBR	
	015	1 1/4	104638	US	32.64	41.4	3.2	FKM	
	016	1 3/8	68927	US	35.94	44.45	3.2	NBR	
	016	1 3/8	104643	US	35.94	44.45	3.2	FKM	
	017	1 1/2	68928	US	38.96	47.75	3.2	NBR	
	017	1 1/2	104646	US	38.96	47.75	3.2	FKM	
	018	1 3/4	68929	US	45.34	57.15	3.2	NBR	
	018	1 3/4	104651	US	45.34	57.15	3.2	FKM	
	019	2	64617	US	51.69	63.5	3.2	NBR	
	019	2	104657	US	51.69	63.5	3.2	FKM	
	020	3/8	1/8	35493	US	10.37	15.88	2	NBR
	020	3/8	1/8	104570	US	10.37	15.88	2	FKM
	021	1/2	1/4	35494	US	13.74	20.57	2	NBR
	021	1/2	1/4	104586	US	13.74	20.57	2	FKM
	022	60		68917	US	15.83	22.23	2	NBR
	022	60		104593	US	15.83	22.23	2	FKM
	023	3/8		35495	US	17.28	23.8	2	NBR
	023	3/8		104599	US	17.28	23.80	2	FKM
	024	3/4		68920	US	19.69	26.92	2.3	NBR
	024	3/4		104607	US	19.69	26.92	2.3	FKM
	025	13/16	1/2	39319	US	21.54	28.58	2.3	NBR
	025	13/16	1/2	104611	US	21.54	28.58	2.3	FKM
	026	7/8	5/8	68921	US	23.49	31.75	2.3	NBR
	026	7/8	5/8	104618	US	23.49	31.75	2.3	FKM
	027	1	3/4	35497	US	27.05	34.93	2.3	NBR
	027	1	3/4	104625	US	27.05	34.93	2.3	FKM
	028	1 1/16		68923	US	27.82	38.61	2.3	NBR
	028	1 1/16		104630	US	27.82	38.61	2.3	FKM
	029	1 3/16	7/8	35498	US	30.81	38.10	2.3	NBR
	029	1 3/16	7/8	104636	US	30.81	38.10	2.30	FKM
	030	1 5/16	1	35499	US	33.89	42.80	3.2	NBR
	030	1 5/16	1	104640	US	33.89	42.8	3.2	FKM
	031	1 5/16	1	68926	US	33.89	42.8	2.3	NBR
	031	1 5/16	1	104639	US	33.89	42.8	2.3	FKM
	032	1 5/8	1 1/4	35500	US	42.93	52.38	3.2	NBR
	032	1 5/8	1 1/4	104649	US	42.93	52.38	3.2	FKM
	033	1 7/8	1 1/2	35501	US	48.44	58.60	3.2	NBR
	033	1 7/8	1 1/2	104653	US	48.44	58.6	3.2	FKM
	034	2 1/8	1 3/4	60471	US	54.89	69.85	3.2	NBR
	034	2 1/8	1 3/4	104660	US	54.89	69.85	3.2	FKM
	035	2 1/4		64616	US	58.04	70.36	3.2	NBR
	035	2 1/4		104661	US	58.04	70.36	3.2	FKM
	036	2		68930	US	60.58	73.03	3.2	NBR
	036	2		104663	US	60.58	73.03	3.2	FKM
	037	2 1/2		68931	US	64.39	77.22	3.2	NBR
	037	2 1/2		104665	US	64.39	77.22	3.2	FKM
	038	2 1/4		68932	US	66.68	79.5	3.2	NBR
	038	2 1/4		104666	US	66.68	79.5	3.2	FKM
	039	2 1/2		68933	US	76.08	90.17	3.2	NBR
	039	2 1/2		104668	US	76.08	90.17	3.2	FKM

US

Ref. No.	Thread imperial	Item No.	Code	d	D	S	Mat.
	BSP						

Sizes


519	1/16	69232	US	8.3	12.7	1.2	NBR
519	1/16	104560	US	8.3	12.7	1.2	FKM
510	1/8	69182	US	10.4	14.7	1.2	NBR
510	1/8	104571	US	10.4	14.7	1.2	FKM
511	1/4	69224	US	13.85	18.7	1.2	NBR
511	1/4	104588	US	13.85	18.7	1.2	FKM
512	3/8	69225	US	17.35	22.7	1.2	NBR
512	3/8	104600	US	17.35	22.7	1.2	FKM
513	1/2	69226	US	21.65	26.7	1.2	NBR
513	1/2	104612	US	21.65	26.7	1.2	FKM
514	3/4	69227	US	27.3	32.6	1.2	NBR
514	3/4	104627	US	27.3	32.6	1.2	FKM
515	1	69228	US	34.2	39.5	2	NBR
515	1	104641	US	34.2	39.5	2	FKM
516	1 1/4	69229	US	42.8	49.5	2	NBR
516	1 1/4	104648	US	42.8	49.5	2	FKM
517	1 1/2	69230	US	48.7	55.5	2	NBR
517	1 1/2	104654	US	48.7	55.5	2	FKM
518	2	69231	US	60.5	68.5	2	NBR
518	2	104662	US	60.5	68.5	2	FKM

**Sizes
stainless steel**

Ref. No.	Thread metric	Item No.	Code	d	D	S	Mat.
201	M3.5	117619	US	4.1	7.2	1	NBR
202	M4	125704	US	4.5	7	1	NBR
203	M5	121781	US	5.7	9	1	NBR
204	M5	175187	US	5.7	10	1	NBR
205	M5.5	175188	US	6.2	9.2	1	NBR
304	M6	125725	US	6.6	11	1	NBR
206	M6	121768	US	6.7	10	1	NBR
207	M6	151893	US	6.7	11	1	NBR
210	M6.7	175189	US	7.3	10.2	1	NBR
211	M8	175190	US	8.5	13.4	1	NBR
212	M8	159580	US	8.7	13	1	NBR
213	M8	89092	US	8.7	14	1	NBR
217	M10	125726	US	10.7	16	1.5	NBR
218	M10	115860	US	10.7	18	1.5	NBR
222	M12	175191	US	12.7	18	1.5	NBR
225	M13	175192	US	13.7	22	1.5	NBR
224	M13	175193	US	13.7	20	1.5	NBR
227	M14	175194	US	14.7	22	1.5	NBR
228	M15	175195	US	16	22.7	1.5	NBR
229	M16	124715	US	16.7	24	1.5	NBR
230	M17	175196	US	17.4	24	1.5	NBR
232	M18	170827	US	18.7	26	1.5	NBR
235	M22	175197	US	22.5	28	1.5	NBR
236	M22	175198	US	22.7	30	2	NBR
238	M24	172487	US	24.7	32	2	NBR
239	M26	143618	US	26.7	35	2	NBR
241	M28	175199	US	28.7	37	2	NBR
243	M33	175200	US	33.7	42	2	NBR
244	M33	135232	US	34.3	43	2	NBR
247	M42	143619	US	42.7	53	3	NBR
248	M48	108501	US	48.7	59	3	NBR

US

Ref. No.	Thread imperial BSP	Item No.	Code	d	D	S	Mat.
-------------	---------------------------	----------	------	---	---	---	------

Abmessungen

001	6BA	1	126233	US	3.05	6.35	1.2	NBR
003	2BA		175201	US	5.21	8.38	1.2	NBR
004	1/4		155663	US	6.86	13.21	1.2	NBR
006	5/16		175322	US	8.31	13.34	1.2	NBR
007	5/16		134362	US	8.64	14.22	1.2	NBR
020	3/8	1/8	175202	US	10.37	15.88	2	NBR
021	1/2	1/4	175203	US	13.74	20.57	2	NBR
011	5/8		175204	US	16.51	25.4	2	NBR
023		3/8	175205	US	17.28	23.8	2	NBR
012	11/16		175206	US	18.16	25.4	2.3	NBR
025	13/16	1/2	84606	US	21.54	28.58	2.3	NBR
026	7/8	5/8	175207	US	23.49	31.75	2.3	NBR
027	1	3/4	175208	US	27.05	34.93	2.3	NBR
029	1 3/16	7/8	175209	US	30.81	38.1	2.3	NBR
030	1 5/16	1	175210	US	33.89	42.8	3.2	NBR
017	1 1/2		175211	US	38.96	47.75	3.2	NBR
032	1 5/8	1 1/4	175212	US	42.93	52.38	3.2	NBR
033	1 7/8	1 1/2	175213	US	48.44	58.6	3.2	NBR

USS


Abmessungen	Ref. No.	Thread metric	Item No.	Code	d	D	S	Mat.
	004	M4	89091	US	4.5	7	1	NBR
	004	M4	104324	US	4.5	7	1	FKM
		M5	174532	US	5.6	10	1	NBR
		M5	175021	US	5.6	10	1	FKM
		M5	89099	US	5.7	10	1	NBR
		M5	124784	US	5.7	10	1	FKM
		M5	171414	US	5.7	9	1	NBR
	006	M6	175022	US	5.7	9	1	NBR
	006	M6	89086	US	6.6	11	1	NBR
		M6	104326	US	6.6	11	1	FKM
		M6	134211	US	6.7	10	1	NBR
		M6	175023	US	6.7	10	1	FKM
		M6	90384	US	6.7	11	1	NBR
		M6	175024	US	6.7	11	1	NBR
		M6	161414	US	7.9	14.9	1	NBR
			175025	US	7.9	14.9	1	FKM
		M8	175017	US	8.6	13	1	NBR
		M8	175026	US	8.6	13	1	FKM
		M8	174526	US	8.7	13	1	NBR
		M8	175027	US	8.7	13	1	FKM
	866	M8	4007	US	8.7	14	1	NBR
	866	M8	104672	US	8.7	14	1	FKM
	708	M10	89100	US	10.7	16	1.5	NBR
	708	M10	104674	US	10.7	16	1.5	FKM
		M10	175020	US	10.7	17	1.5	NBR
		M10	175034	US	10.7	17	1.5	FKM
	012	M12	175016	US	12.7	18	1.5	NBR
	012	M12	104329	US	12.7	18	1.5	FKM
	867	M12	49423	US	12.7	19	1.5	NBR
	867	M12	104675	US	12.7	19	1.5	FKM
		M12	174527	US	12.7	20	1.5	NBR
		M12	175040	US	12.7	20	1.5	FKM
		M13	174528	US	13.7	22	1.5	NBR
		M13	175033	US	13.7	22	1.5	FKM
	868	M14	89098	US	14.7	22	1.5	NBR
			104677	US	14.7	22	1.5	FKM
	868	M14	89090	US	16.7	24	1.5	NBR
	870	M16	104679	US	16.7	24	1.5	FKM
		M17	174529	US	17.4	24	1.5	NBR
		M17	175029	US	17.4	24	1.5	FKM
	872	M18	41640	US	18.7	26	1.5	NBR
	872	M18	104682	US	18.7	26	1.5	FKM
	873	M20	41654	US	20.7	28	1.5	NBR
	873	M20	104683	US	20.7	28	1.5	FKM
	010	M10	41648	US	10.35	16	2	NBR
	010	M10	104328	US	10.35	16	2	FKM
	874	M22	89094	US	22.7	30	2	NBR
	874	M22	89101	US	22.7	30	2	FKM
	875	M24	41647	US	24.7	32	2	NBR
	875	M24	104686	US	24.7	32	2	FKM
		M26	174530	US	26.7	35	2	NBR
		M26	164590	US	26.7	35	2	FKM
		M27	175018	US	27.7	36	2	NBR
		M27	175032	US	27.7	36	2	FKM
		M30	175019	US	30.7	39	2	NBR

USS

Ref. No.	Thread metric	Item No.	Code	d	D	S	Mat.
-------------	------------------	----------	------	---	---	---	------

Abmessungen

	M30	164734	US	30.7	39	2	FKM
	M36	174531	US	36.7	46	2	NBR
	M36	175030	US	36.7	46	2	FKM
043	M42	41636	US	43	54	2.5	NBR
043	M42	104330	US	43	54	2.5	FKM

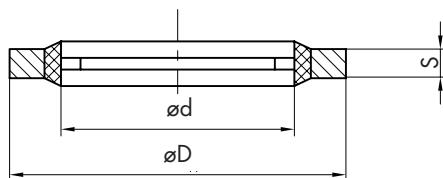

Ref. No.	Thread imperial	BSP	Item No.	Code	d	D	S	Mat.
820	3/8	1/8	89096	US	10.37	15.88	2	NBR
820	3/8	1/8	104673	US	10.37	15.88	2	FKM
821	1/2	1/4	89087	US	13.74	20.57	2	NBR
821	1/2	1/4	104676	US	13.74	20.57	2	FKM
869	5/8		49424	US	16.51	25.4	2	NBR
			104678	US	16.51	25.4	2	FKM
823	3/8		89088	US	17.28	23.8	2	NBR
823	3/8		104680	US	17.28	23.8	2	FKM
871	11/16		45469	US	18.16	25.4	2.5	NBR
871	11/16		104681	US	18.16	25.4	2.5	FKM
825	13/16	1/2	89095	US	21.54	28.58	2.5	NBR
825	13/16	1/2	104684	US	21.54	28.58	2.5	FKM
826	7/8	5/8	5467	US	23.49	31.75	2.5	NBR
826	7/8	5/8	104685	US	23.49	31.75	2.5	FKM
827	1	3/4	89089	US	27.05	34.93	2.5	NBR
			104687	US	27.05	34.93	2.5	FKM
829	1 3/16	7/8	3979	US	30.81	38.1	2.5	NBR
829	1 3/16	7/8	104688	US	30.81	38.1	2.5	FKM
			1117640	US	33.89	42.8	2.5	NBR
830	1 5/16	1	89093	US	33.89	42.8	3.2	NBR
			104689	US	33.89	42.8	3.2	FKM
			174903	US	38.96	47.75	3.2	NBR
			174904	US	38.96	47.75	3.2	FKM
832	1 5/8	1 1/4	10510	US	42.93	52.38	3.2	NBR
832	1 5/8	1 1/4	104690	US	42.93	52.38	3.2	FKM
833	1 7/8	1 1/2	90383	US	48.44	58.6	3.2	NBR
833	1 7/8	1 1/2	104691	US	48.44	58.6	3.2	FKM
834	2 1/8	1 3/4	28789	US	54.89	69.85	3.2	NBR
834	2 1/8	1 3/4	104692	US	54.89	69.85	3.2	FKM
836	2		41642	US	60.58	73.03	3.2	NBR
			104693	US	60.58	73.03	3.2	FKM
838	2 1/4		45470	US	66.68	79.5	3.2	NBR
838	2 1/4		104694	US	66.68	79.5	3.2	FKM
839	2 1/2		45473	US	76.08	90.17	3.2	NBR
839	2 1/2		104695	US	76.08	90.17	3.2	FKM
879			104173	US	89.09	101.35	3.2	NBR
879			104191	US	89.09	101.35	3.2	FKM

USS

	Ref. No.	Thread imperial	BSP	Item No.	Code	d	D	S	Mat.
Abmessungen Edelstahl/rost- und säurebeständig	820	3/8	1/8	175750	US	10.37	15.88	2	NBR
	820	3/8	1/8	175726	US	10.37	15.88	2	FKM
	821	1/2	1/4	175751	US	13.74	20.57	2	NBR
	821	1/2	1/4	175727	US	13.74	20.57	2	FKM
	869	5/8		175752	US	16.51	25.4	2	NBR
	869	5/8		175730	US	16.51	25.4	2	FKM
	823		3/8	175753	US	17.28	23.8	2	NBR
	823		3/8	175741	US	17.28	23.8	2	FKM
	871	11/16		175754	US	18.16	25.4	2.5	NBR
	871	11/16		175731	US	18.16	25.4	2.5	FKM
	825	13/16	1/2	175755	US	21.54	28.58	2.5	NBR
	825	13/16	1/2	175732	US	21.54	28.58	2.5	FKM
	826	7/8	5/8	175756	US	23.49	31.75	2.5	NBR
	826	7/8	5/8	175733	US	23.49	31.75	2.5	FKM
	827	1	3/4	175757	US	27.05	34.93	2.5	NBR
	827	1	3/4	175734	US	27.05	34.93	2.5	FKM
	829	1 3/16	7/8	175758	US	30.81	38.1	2.5	NBR
	829	1 3/16	7/8	175735	US	30.81	38.1	2.5	FKM
	830	1 5/16	1	175759	US	33.89	42.8	3.2	NBR
	830	1 5/16	1	151017	US	33.89	42.8	3.2	FKM
		1 1/2		175760	US	38.96	47.75	3.2	NBR
		1 1/2		175736	US	38.96	47.75	3.2	FKM
	832	1 5/8	1 1/4	175761	US	42.93	52.38	3.2	NBR
	832	1 5/8	1 1/4	175737	US	42.93	52.38	3.2	FKM
	833	1 7/8	1 1/2	175762	US	48.44	58.6	3.2	NBR
	834	2 1/8	1 3/4	175763	US	54.89	69.85	3.2	NBR
	836		2	175764	US	60.58	73.03	3.2	NBR