

Valves series A1

1/8", 5/3, manually operated, open centres




Executions			
Version	Symbol	Code	Item
5/3 , top lever open centres spring return		034662	A1MA171LT
5/3 , top lever open centres 3 position		034663	A1MA174LT

Code key

Series	Actuation	Size	Function	Actuation
A1	MA=Manual	1 = 1/8"	71 = 5/3 CA spring return 74 = 5/3 CA 3 positions	LT = top lever



Series of spool valves, with static seals, high flow.

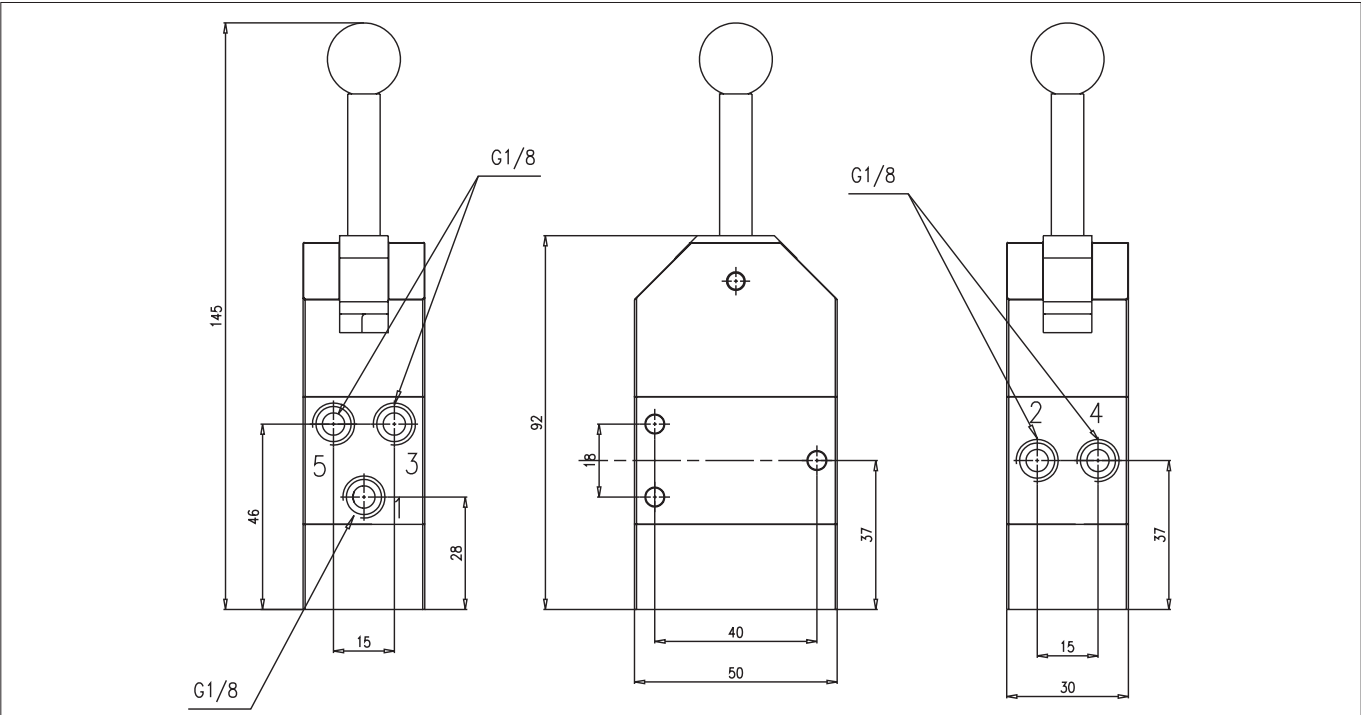

Technical data	
Fluid	Compressed filtered air with or without lubrication. Lubrication, if be used, must be continous.
Pressure range	0 ÷ 10 bar
Temperature range	-10 °C ÷ + 80°C
Orifice	6,5 mm
Flow	650 NI/min a 6 bar with ΔP 1 bar
Mounting	In any position
Materiasi	<div> <div> Body: Cover: End cap: Spool: Distancers: Seals: Lever: </div> <div> Aluminium Aluminium Aluminium Chemical nickel plated aluminium Plastic Nitrile rubber (NBR) Steel </div> </div>