

# Connection blocks type B for hydraulic power packs

Additional connection block types:

Type A..	acc. to D 6905 A/1	Connection blocks for pipe connection or direct mounting of valve banks with pressure limiting valve
Type AX..	acc. to D 6905 TÜV	Connection blocks with pressure limiting valve with unit approval (TÜV)
Type C	acc. to D 6905 C	Simple connection blocks for pipe connection

## 1. General information

The connection blocks listed here can be mounted directly onto to the following compact hydraulic power packs:

HC, HCW	acc. to D 7900	} Compact hydraulic power packs
MP, MPW	acc. to D 7200 H	
FP, FPX	acc. to D 7310	
HK, HKF, HKL	acc. to D 7600 ++	
LP	acc. to D 7280 H	Air driven hydraulic pump


There is also a connection block with tapped ports P and R available for applications where connection to the power pack is intended via pipes (see sect. 2.5).

These blocks are intended for intermittent service common with lifting devices and clamping applications where single and double acting cylinders are used and a simple and compact control lay-out is advantageous.

Two basic types are available, which only differ in their max. permissible operating pressure and the max. permissible flow. Only type 2 enables the control of double acting cylinders. Types 1 to 3 feature an idle circulation valve to relieve the hydraulic circuit whereas type 4 features a pressure actuated relieve valve which operates automatically.

## 2. Available versions

Order examples:

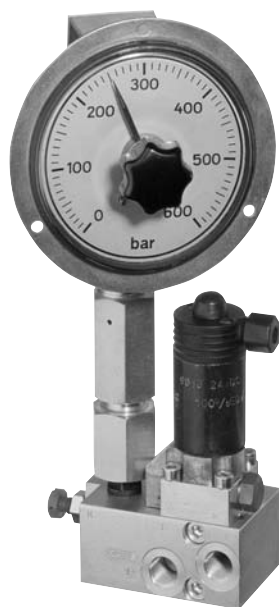

### Type 1

MP44-H7,0/B10 - B1/300-1-31D-G24

Version for a max. return flow to the tank of 6, 12, or 25 lpm and permissible pressure of 500 or 700 bar intended for single acting consumers, see sect. 2.1



### Type 2

HC24/H1,35 - B4/200-WN1D-13/5-G24

Version for max. flow of 6 to 8 lpm and permissible pressure of 320 or 450 bar, intended for single or double acting (differential) cylinders, see sect. 2.2



### Type 3

HK44/1-H4,2 - B31T/200-EM11V-12/5-WG230

Version for max. flow of 20 lpm and permissible pressure of 450 bar, intended for single acting consumers, see sect. 2.3

### Type 4 (without photo)

HC12/0,65 - B1/200-DW-10

Version for clamping devices with max. flow of 12 lpm and permissible pressure of 300 bar, see sect. 2.4

## 2.1 Connection blocks type 1

Advantageous for applications with high pressure (> 450 bar) and/or high return flow from the consumer to the tank ( $Q_{\text{return}} > 8 \text{ lpm}$ ).

For further notes about direct mounting onto other compact hydraulic power packs see restrictions below 1).

For versions intended for direct pipe connection, see section 2.5


Order examples  Order coding for a compact hydraulic power pack acc. to D 7900 or D 7200 H

Example 1: HC 34/1,5 - **B2/600 - 1 - 33 3 D - G 24**


Example 2: MP 44-H9,5/B25 - **B1/180 - 2 - 1 2 D - WG 230**

Symbols to examples above

Example 1:  
Version with pressure switch for single acting consumers

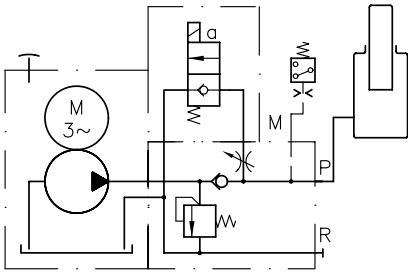

Example 2:  
Simple version for single acting consumers

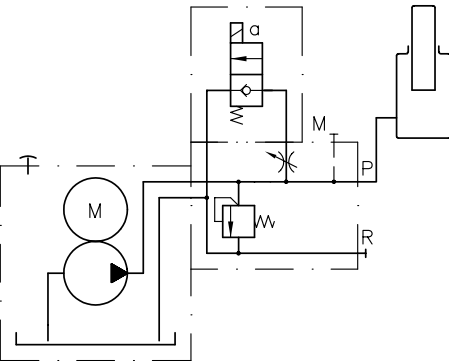

1) Restrictions to the available versions

Pump type	Restrictions
HC D 7900 MP D 7200 H HK D 7600-..	None
FP D 7310	Size 1 and 2 (table 2 and 4) are not suited ( $Q_{\text{max}}$ of the pump type FP approx. 1.1 lpm). Version with pressure switch is not possible due to spatial reasons (see table 3)
LP D 7280 H	Version with pressure switch is not possible due to spatial reasons (see table 3)

2) Only for size 1 and 2 (see table 2)

3) Including fitting type ERMETO EGE 8 - SR - ED and GE 8 - PSR/A3C, but without plug MSD-T7 (must be ordered separately when required)

**Table 5:** Directly mounted directional seated valve acc. to D 7300 (size 0, 1, 2)

Flow pattern Coding and symbol			Nom. voltage $U_N$ of the actuation solenoid	
<b>D</b>	<b>F</b>	<b>X</b>	<b>G 24</b>	24V DC
		Blanking plate 	<b>WG 230</b>	230V AC 50 / 60 Hz
			For further specifications and actuation types, see D 7300	

**Table 4:** Options (check valve / throttle)

Available for size (table 2)	0	1	2	3
	●	●		
	●	●	●	●
			●	●
Coding	0	1	2	3
Version with check valve	no	yes	no	yes
Version with throttle	no	no	yes	yes
Application	---	Mainly for clamping hydraulics	Mainly for lifting devices	

**Table 3:** Pressure switch 1) (mainly for hydr. clamping circuits)

Coding	Pressure switch DG acc. to D 5440(E)	Pressure range from ... to (bar)	Note:
<b>1</b>	Without DG, tapped plug G 1/4		$p_{\text{min}}$ represents the lower reference value for the pressure setting, where the pressure switches are normally used (the switching hysteresis increases dramatically below this figure). Doesn't apply to electronic pressure switch type DG5E-..., where the hysteresis is adjustable.
<b>5</b>	DG 1 R	20 ... 600	
<b>5S</b>	DG 1 RS	20 ... 600	
<b>33</b>	DG 33 - Y1	200 ... 700	
<b>34</b>	DG 34 - Y1	100 ... 400	
<b>35</b>	DG 35 - Y1	20 ... 250	
<b>36</b>	DG 36 - Y1	4 ... 12	
<b>364</b>	DG 364 - Y1	4 ... 50	
<b>365</b>	DG 365 - Y1	12 ... 170	
<b>5E2</b>	DG5E-250 3)	(0) ... 250	
<b>5E4</b>	DG5E-400 3)	(0) ... 400	

**Table 2:** Size

Coding	0	1 1)	2 1)
Port DIN ISO 228/1 (BSPP)	G 1/4	G 3/8	G 1/2
Permissible return flow P → R (lpm)	6	12	25
Permissible pressure (bar) with < 10% ED	500	700	700

**Table 1:** Basic type

Coding	Design	Pressure range (bar)
<b>B1/...</b>	Tool adjustable	(0) ... 80
<b>B2/...</b>	Manually adjust.	(0) ... 160
	Desired pressure setting (bar)	(0) ... 315
		(0) ... 500
		(0) ... 700 2)

Take into account the permissible pressure per flow of the respective pump!

## 2.2 Connection blocks type 2

Intended mainly for use in smaller circuits with max. pressure of 450 bar and return flows from the consumer to the tank below 8 lpm, when combined with differential cylinders.

For further notes about direct mounting onto other hydraulic power unit see restrictions below <sup>3)</sup>.

For versions intended for direct pipe connection, see section 2.5

Order examples

Order coding for a compact hydraulic power pack acc. to D 7900


Example 1: HC 24/0,64 - **B4/200 - WN1M- 11/5- G 24**

Example 2: - **B3/400 - WH1H - 10/3- G 24**

Symbols to examples above


Example 1:

Version with pressure gauge, pressure switch, and check valve for double acting consumers (connection pump / consumer in idle position)

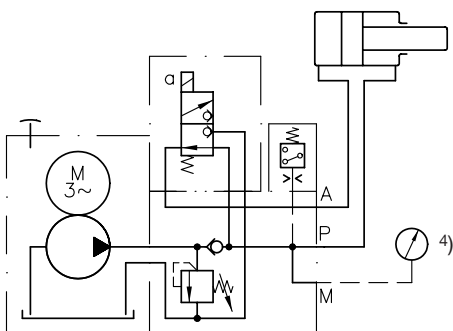

Example 2:

Version with pressure gauge and pressure switch (without check valve) for double acting consumers (with relieve to the tank in idle position)

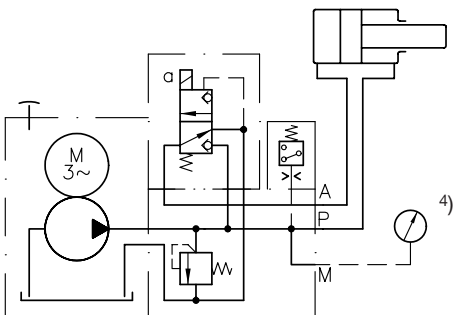

1) Observe the pressure range of the directional seated valve type WN1 (320 bar). For more detailed data, see D 7470A/1

2) Other pressure switches that could be used as well: DG 1.. acc. to D 5440

3) Restrictions to the possible combinations:

Type of pump	Restrictions
HC D 7900 MP D 7200 H HK D 7600-.. LP D 7280 H	None
FP D 7310	Version with pressure switch and port for pressure gauge is not available due to spatial reasons

4) Pressure gauge (optional), not scope of delivery standard.

Table 9: Pressure switch <sup>2)</sup>

Coding	Pressure switch DG acc. to D 5440(E)	Pressure range from ... to (bar)	
<b>2</b>	Without DG, prepared for retrofitting		
<b>3</b>	DG 33	200 ... (700)	Attention: Observe the pressure range of the directly mounted directional seated valve!
<b>4</b>	DG 34	100 ... 400	
<b>5</b>	DG 35	20 ... 250	
<b>6</b>	DG 36	4 ... 12	
<b>64</b>	DG 364	4 ... 50	
<b>65</b>	DG 365	12 ... 170	
<b>5E2</b>	DG 5E-250-Y1E	(0) ... 250	P <sub>max</sub> WH 1 450 bar WN 1 350 bar
<b>5E4</b>	DG 5E-400-Y1E	(0) ... 400	

Also see note regarding the switching hysteresis in page 2, table 3.

Table 8: Additional elements (check valve)

Coding	10	11
Check valve	Without	With

Table 7: Directly mounted directional seated valve acc. to D 7470 A/1

Coding Symbol					Nom. voltage U <sub>N</sub> of the actuation solenoid
<b>WN1H</b>	<b>WN1M</b>	<b>WH1H</b>	<b>WH1M</b>	<b>G 12</b>	12V DC
				<b>G 24</b>	24V DC
				<b>WG 230</b>	230V AC 50/60 Hz
Max. flow:		WN1.. approx. 5 lpm WH1.. approx. 8 lpm		Special voltage on request; See further data in D 7470 A/1	
Max. pressure:		WN1.. 320 bar <sup>3)</sup> WH1.. 450 bar			

Table 6: Basic type

Coding	Pressure limiting valve	Port M for the connection of a pressure gauge and for DG acc. to D 5440(E)	Pressure range from ... to (bar) <sup>1)</sup>	Tapped port size DIN ISO 228/1 (BSPP)
<b>B3/...</b>	Tool adjustable	Yes <sup>3)</sup>	(0) ... 80 (0) ... 160 (0) ... 315 (0) ... 450	G 1/4
<b>B4/...</b>	Manually adjustable			

Desired pressure setting (bar)

### 2.3 Connection blocks type 3

Version used preferably for applications with a max. flow of 20 lpm and permissible pressure of 450 bar.  
For versions enabling direct pipe connection, see sect. 2.5.

Order examples

Order coding for a compact hydraulic power pack acc. to D 7600-4


Example 1: **HK 44/1-H 4,2 - B 31/300 - EM 11V - 13/2 - G 24**

Example 2: **C 15 - B 31T/200 - EM 11V - 12/5 - WG 230**


Connection block for direct pipe connection (sect. 2.5)

Symbols to examples above

Example 1:  
Version with integrated drain valve

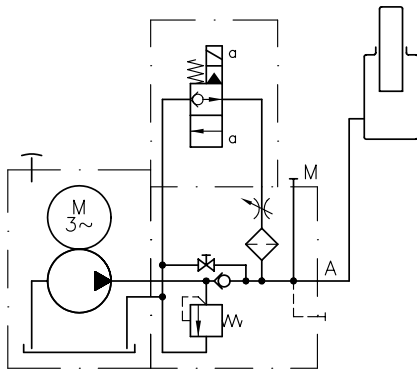

Example 2:  
Version with additional return port

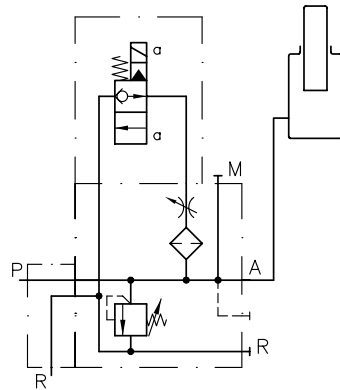

**Table 14:** Pressure switch

Coding	Pressure switch DG acc. to D 5440(E)	Pressure range from ... to (bar)
<b>2</b>	Without DG, prepared for retrofitting	
<b>3</b>	DG 33	200...(700)
<b>4</b>	DG 34	100...400
<b>5</b>	DG 35	20...250
<b>6</b>	DG 36	4...12
<b>64</b>	DG 364	4...50
<b>65</b>	DG 365	12...170
<b>5E2</b>	DG 5E-200-Y1E	(0) ... 200
<b>5E4</b>	DG 5E-400-Y1E	(0) ... 400



Attention: Observe the pressure range of the directly mounted directional seated valve!  
P<sub>max</sub> = 450 bar

Also see note regarding the switching hysteresis in page 2, table 3.

**Table 13:** Additional elements (check valve / throttle)

Coding		<b>10</b>	<b>11</b>	<b>12</b>	<b>13</b>
Version	Check valve	No	Yes	No	Yes
	Throttle	No	No	Yes	Yes

**Table 12:** Directly mounted directional seated valve acc. to D 7490/1

Coding Symbols	Nom. voltage U <sub>N</sub> of the actuation solenoid	
<b>EM 11V</b> 	<b>EM 11S</b> 	<b>G 12</b> 12V DC
		<b>G 24</b> 24V DC
		<b>WG 230</b> 230V AC 50 and 60 Hz

For more detailed data, see D 7490/1.

**Table 11:** Basic type

Version	Coding	Pressure limiting valve		Ports DIN ISO 228/1 (BSPP)	
			Pressure range from ... to (bar)	A	R
With integrated drain valve	<b>B 31/...</b>	Tool adjustable	(0) ... 80 (0) ... 160 (0) ... 315 (0) ... 450	G 1/4	---
	<b>B 41/...</b>	Manually adjust.			
	<b>B 32/...</b>	Tool adjustable		G 3/8	---
	<b>B 42/...</b>	Manually adjust.			
With additional return port	<b>B 31T/...</b>	Tool adjustable		G 1/4	G 1/4
	<b>B 41T/...</b>	Manually adjust.			

Desired pressure setting bar

### Connection blocks type 3 - Continuation

Version with 2-way flow control valve for load independent dropping of the load

$p_{max} = 315 \text{ bar}$

$Q_{max} = 40 \text{ lpm}$

Order examples      Order coding for a compact hydraulic power pack acc. to D 7900


Example 1:    HCW 34 - **B 32/250 - EM 21V - R6/10 - 4/220**      - **WG 230**

Example 2:    C 15 - **B 32/300 - EMP 21S - R6/6 - X84V-9/400 - G 24**


Connection block for direct pipe connection (sect. 2.5)

Symbols to examples above


Example 1

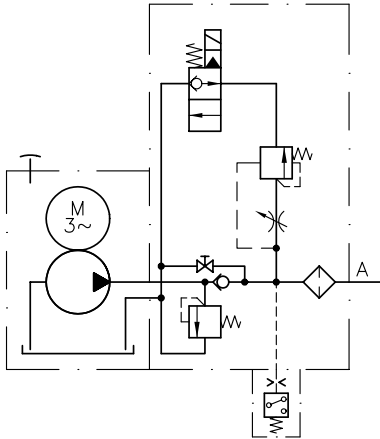

Example 2

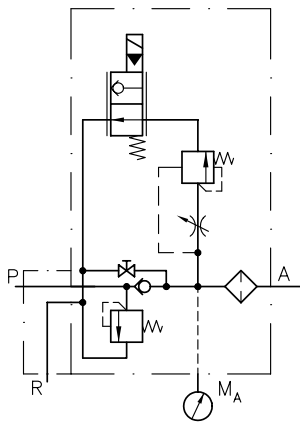

Curve  
2-way flow control valve

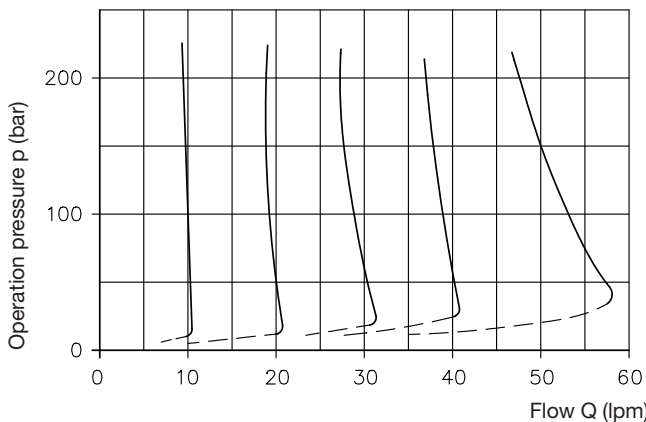

**Table 14a:** Directly mounted components

Coding	Device	Pressure range from ... to (bar)
Pressure switch type DG acc. to D 5440(E)		
<b>2</b>	Without	---
<b>3</b>	DG 33 - Y1	200 ... (700)
<b>4</b>	DG 34 - Y1	100 ... 400
<b>5</b>	DG 35 - Y1	20 ... 250
<b>6</b>	DG 36 - Y1	4 ... 12
<b>64</b>	DG 364 - Y1	4 ... 50
<b>65</b>	DG 365 - Y1	12 ... 170
Fittings X84 acc. to D 7077		
<b>X84V-9/250</b>	Version with pressure gauge (250 bar)	
<b>X84V-9/400</b>	Version with pressure gauge (400 bar)	
For additional versions, see D 7077		

Attention:  
Observe the permissible max. pressure of  $p_{max} = 315 \text{ bar}$

**Table 12a:** Directly mounted directional seated valve acc. to D 7490/1

Coding Symbols	Nom. voltage $U_N$ of the actuation solenoid	
<b>EM 21V</b>	<b>EM 21S</b>	<b>EMP 21V</b>
<b>EMP 21S</b>	<b>G 12</b>	12V DC
<b>G 24</b>	24V DC	
<b>WG 230</b>	230V AC 50/60 Hz	
For more detailed data, see D 7490/1.		

**Table 11a:** Basic type

Version	Coding	Pressure limiting valve Pressure range see table 11	Ports DIN ISO 228/1 (BSP)	
			A	$M_A$
with 2-way flow control valve and drain valve	<b>B 32/.. - .. - R6/..</b>	Tool adjustable	G 3/8	G 1/4
	<b>B 42/.. - .. - R6/..</b>	Manually adjust.		

Setting of the with 2-way flow control valve  
Pressure range: 0.5 ... 40 lpm


Desired pressure setting (bar)  
 $p_{max} = 315 \text{ bar}$

## 2.4 Connection block type 4

Intended for use with clamping devices, where seizing and releasing of a function is activated via the pump pressure. When switching the pump off the system relieves automatically via the pressure actuated valve. The connection block should be located as close as possible to the pump, to ensure quick switching as soon as the pump is cut-off (i.e. direct mounting onto compact hydraulic power packs, like illustrated)

Order coding for a compact hydraulic power pack acc. to D 7900  
 Order example: HC12/1,28 **-B1/180-DW-10**

Flow pattern symbol according to the order example

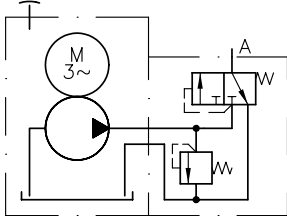

**Table 15:** Basic type

Coding	Pressure limiting valve		Port A DIN ISO 228/1 (BSPP) = G 1/4
	Tool adjustable	Pressure range from ... to (bar)	
<b>B1/...-DW-10</b>	Desired pressure setting (bar)	20 ... 50	Flow Q <sub>max</sub> = 12 lpm  Pressure p <sub>max</sub> = 300 bar
		51 ... 100	
		101 ... 190	
		191 ... 240	
		241 ... 300	

## 2.5 Version for pipe connection

This connection block with tapped ports at P and R is available for applications where the connection to the power pack is intended via pipes. It may be used also in combination with connection blocks acc. to D 6905 A/1 and D 6905 TÜV. Therefore not suited for combination with connection block type 4, see also corresponding note in sect. 2.4.


Order examples:

Example 1 (with connection block type 1): **C 15** - B1/600-1-333D-G 24


Example 2 (with connection block type 3): **C 16** - B42/200-EM11V-12/2-WG 230

Symbols to examples above

Example 1:

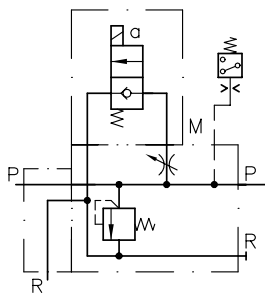

Example 2:

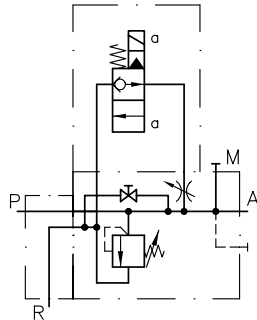

**Table 16:** Connection block

Coding	Ports P and R DIN ISO 228/1 (BSPP)	Suited for		
		Type 1	Type 2	Type 3
<b>C 15</b>	G 1/4	B 1(2)/...-0	B 3(4)/..	B 31(T)/.. B 41(T)/..
<b>C 16</b>	G 3/8	B 1(2)/...-1	---	B 32(T)/.. B 42(T)/..

### 3. Further parameters

#### 3.1 General specifications

Nomenclature, design	Connection block with directly mounted directional valve, either 2/2- or 3/2-way depending on type
Ports	Basic valve can be directly mounted onto compact hydraulic power packs type HC (D 7900), MP (D 7200 H), FP (D 7310), HK (D 7600 ++), and LP (D 7280 H); For onleading ports, see specific data in sect. 4 ++. P = Pressurized fluid A = Consumer M = Pressure gauge R = Return
Installed position	in dependance of the hydraulic power pack, otherwise arbitrary
Back pressure	The $\Delta p$ -Q-curves P(A) → R are rather identical to the one given for the corresponding flow plattern coding in the following pamphlets: For type 1 (sect. 2.1) see D 7300 and for type 2 (sect. 2.2) see D 7470A/1) resp. D 7490/1 (type 3, sect. 2.3). Type 4, sect. 2.4: Pressure for opening (P→A) = 10 bar A→R = approx. 2 bar; P→A = 12 bar (all with $Q_{max} = 12$ lpm)
Pressure fluid	Hydraulic oil conforming DIN 51514 part 1 to 3: ISO VG 10 to 68 conform. DIN 51519. Viscosity range: min. approx. 4; max. approx. 800 mm <sup>2</sup> /sec opt. service: approx. 10 ... 200 mm <sup>2</sup> /sec The back pressure will strongly rise above viscosities of approx. 300 mm <sup>2</sup> /sec. Also suitable are biologically degradable pressure fluids type HEES (Synth. Ester) at service temperatures up to approx. +70°C. Fluid types HEPG and HETG must not be used (due to restrictions caused by oil immersed hydraulic power packs.
Temperature	Ambient: -40 ... +80°C Fluid: -25 ... +80°C, pay attention to the viscosity range! Start temperature down to -40°C are allowable (Pay attention to the viscosity range during start-up!), as long as the operation temperature during consequent running is at least 20K (Kelvin) higher. Biodegradable pressure fluids: Pay attention to manufacturer's information. With regard to the compatibility with sealing materials do not exceed +70°C.
Electrical data	Connection block type 1, sect. 2.1 see D 7300 Connection block type 2, sect. 2.2 see D 7470 A/1 Connection block type 3, sect. 2.3 see D 7490/1

#### 3.2 Mass (weight) approx. kg

Connection block type 1 acc. to sect. 2.1:

Size	Basic coding B1/.. and B2/..	Pressure switch type DG acc. to D 5440(E)	Directional valve acc. to D 7300	
			Coding D and F	Coding X
0	0.9	DG1 = 1.3	0.4	0.1
1	1.2	DG3.. = 0.3	0.7	0.2
2	2.6	DG5E-.. = 0.3	1.2	0.2

Connection block type 2 acc. to sect. 2.2:

B3(4)/.. = approx. 2.7 (without DG)  
= approx. 3.0 (with DG)

Connection block type 3 acc. to sect. 2.3:

B 3(4) 1/... = approx. 0.9  
B 3(4) 2/... = approx. 0.9  
B 3(4) 1T/... = approx. 1.2

+ 0.3 for version with pressure switch type DG

Connection block type 4 acc. to sect. 2.4:

B1/..-DW-10 = approx. 0.9

Connection block acc. to sect. 25:


C 15 und C 16 = approx. 0.2

## 4. Unit dimensions All dimensions in mm and subject to change without notice!

### 4.1 Connection block type 1 acc. to sect. 2.1

Illustrated here is the installation with compact hydraulic power packs type HC (D 7900)  
Example with throttle, without pressure switch

The installation onto hydraulic power packs type HK (D 7600 ++ ) is similarly. The distance dimensions of the connection pedestal, where the connection blocks type B1/.. and B2/.. are mounted (see sect. 4.2) are substantial.

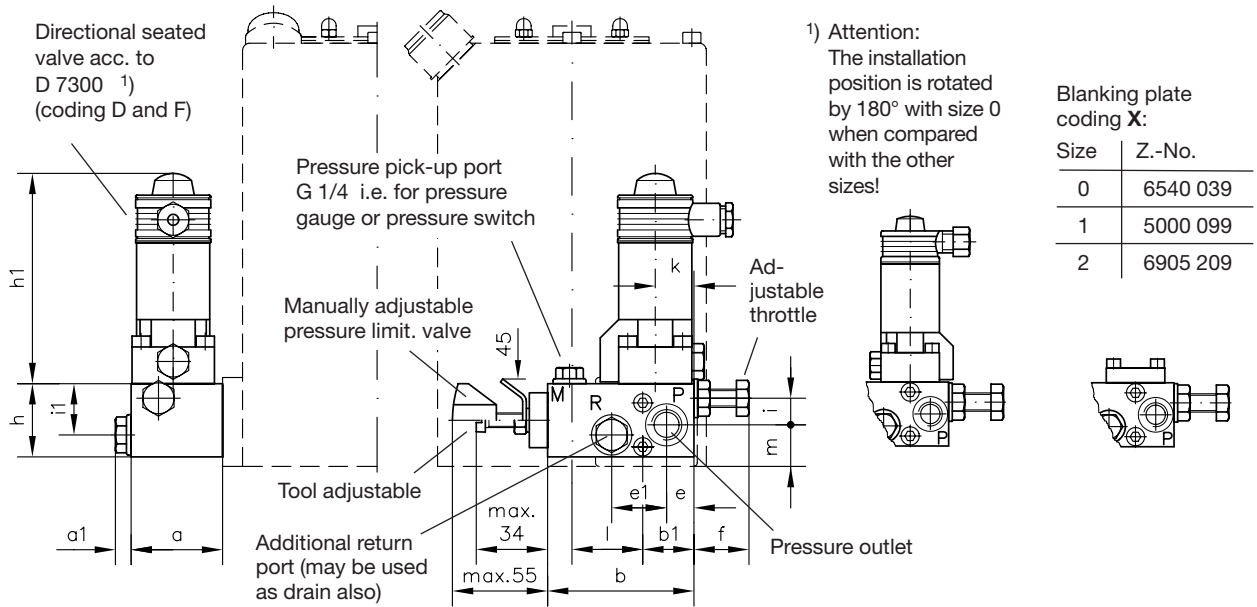

Size	a	a1	b	b1	e	e1	f	h	h1	i	i1	k	P and R
0	50	9	70	19.5	10	30	--	35	90.5	--	25	16	G 1/4
1	50	9	80	28	15	30	30	40	115	22.5	28	21	G 3/8
2	63	12	100	42	24	39	38	50	127	31	20	27.5	G 1/2


	HC1..	HC2..	HC3..
l	24	39	52
m	23	23	30

### Installation at hydraulic power packs type MP

Arrangement with type LP and FP is similar to type MP

Example with pressure switch and throttle

For missing dimensions see above!

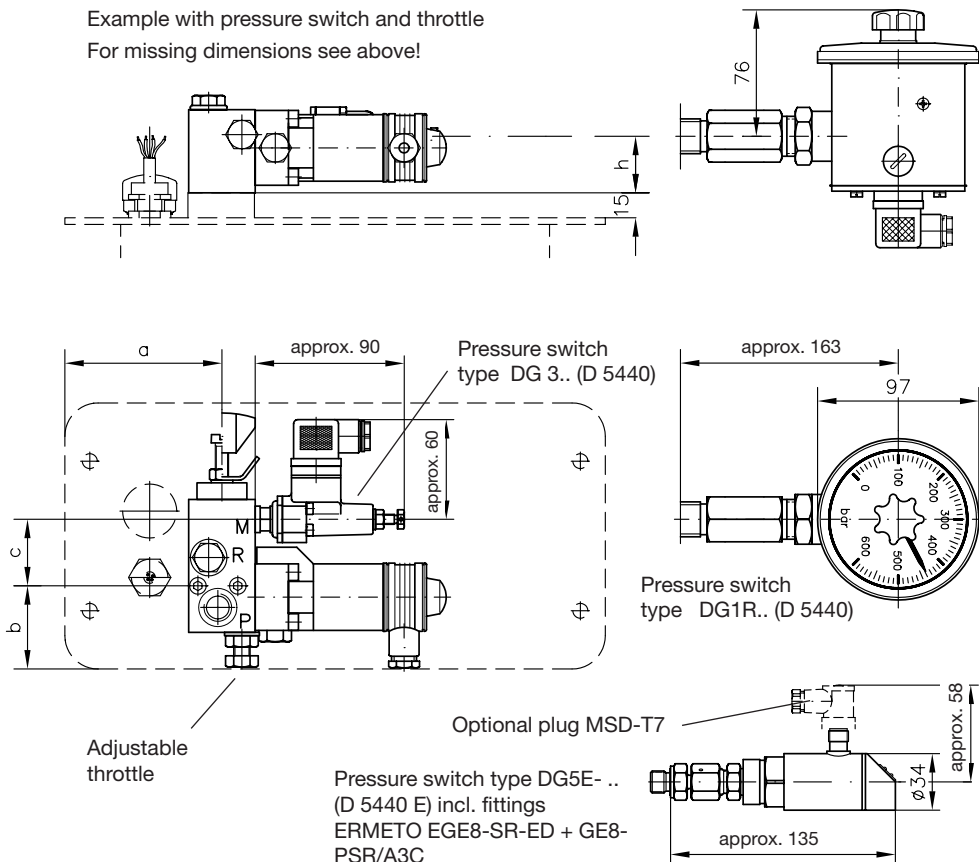

It is necessary to loosen the fittings and turn the pressure switch to ease access to the rear side, while doing the electrical connection. Turn back the pressure switch into the desired position and retighten the fittings after doing the electrical connection.

#### Connection block B1(2)/..:

Size	h	c
0	35	41
1	34	40
2	47	45

#### Hydraulic power pack type MP


	a	b
B 3	77	50
B 5	93	50
B 10	95	50
B 25	105	50
B 55	135	115



### 4.2 Connection blocks type 2 acc. to sect. 2.2

Illustrated here is the installation at compact hydraulic power packs type HK (D 7600 ++)  
The installation onto hydraulic power packs type HC, MP, and FP is similar to illustration in sect. 4.1

Type B3/.. and B4/..

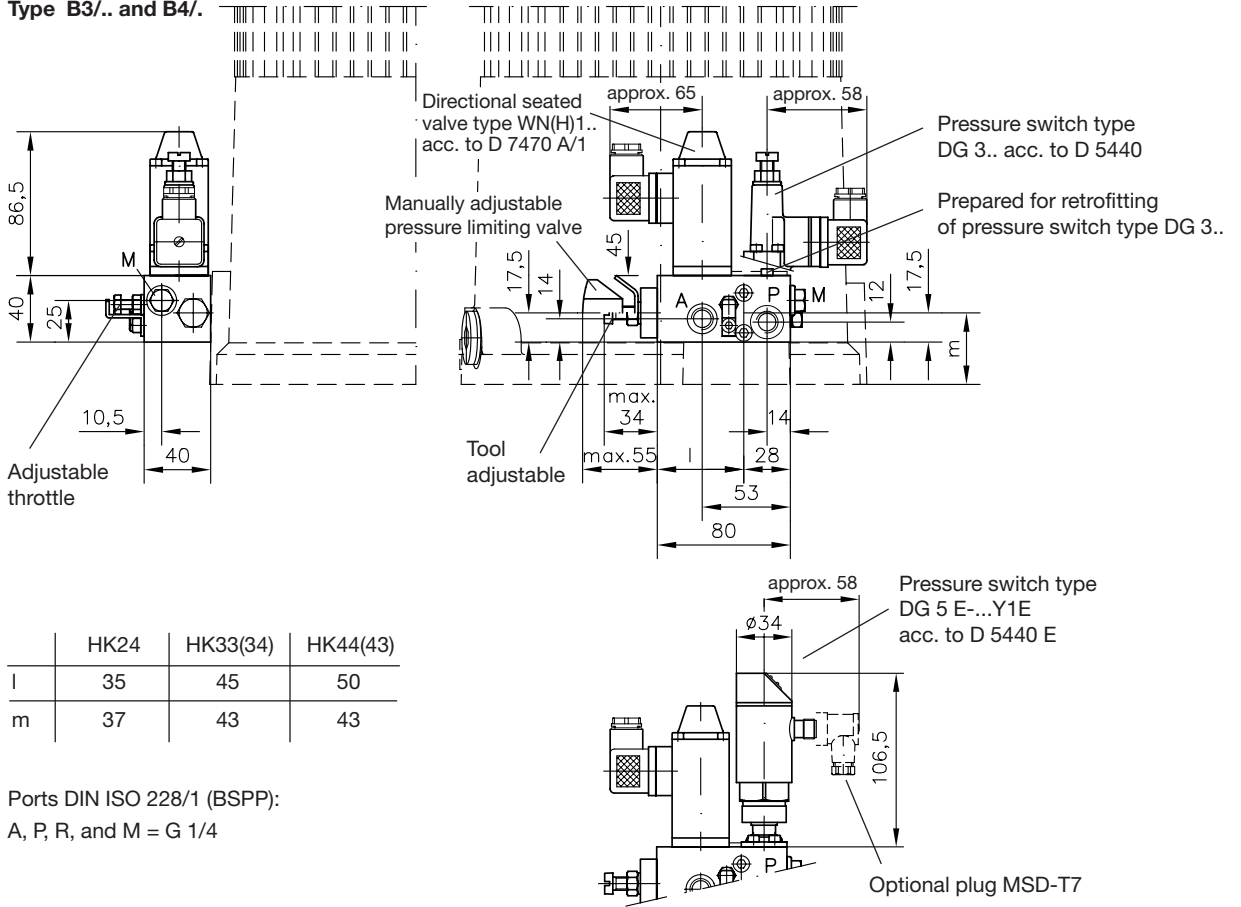


	HK24	HK33(34)	HK44(43)
l	35	45	50
m	37	43	43

Ports DIN ISO 228/1 (BSPP):  
A, P, R, and M = G 1/4

### 4.3 Connection blocks type 3 acc. to sect. 2.3


Illustrated here is the installation at compact hydraulic power packs type HC (D 7900)  
The installation onto hydraulic power packs type MP, HK, and FP is similar to illustration in sect. 4.1

Type B 31/..-EM 11..  
B 41/..-EM 11..  
B 32/..-EM 11..  
B 42/..-EM 11..

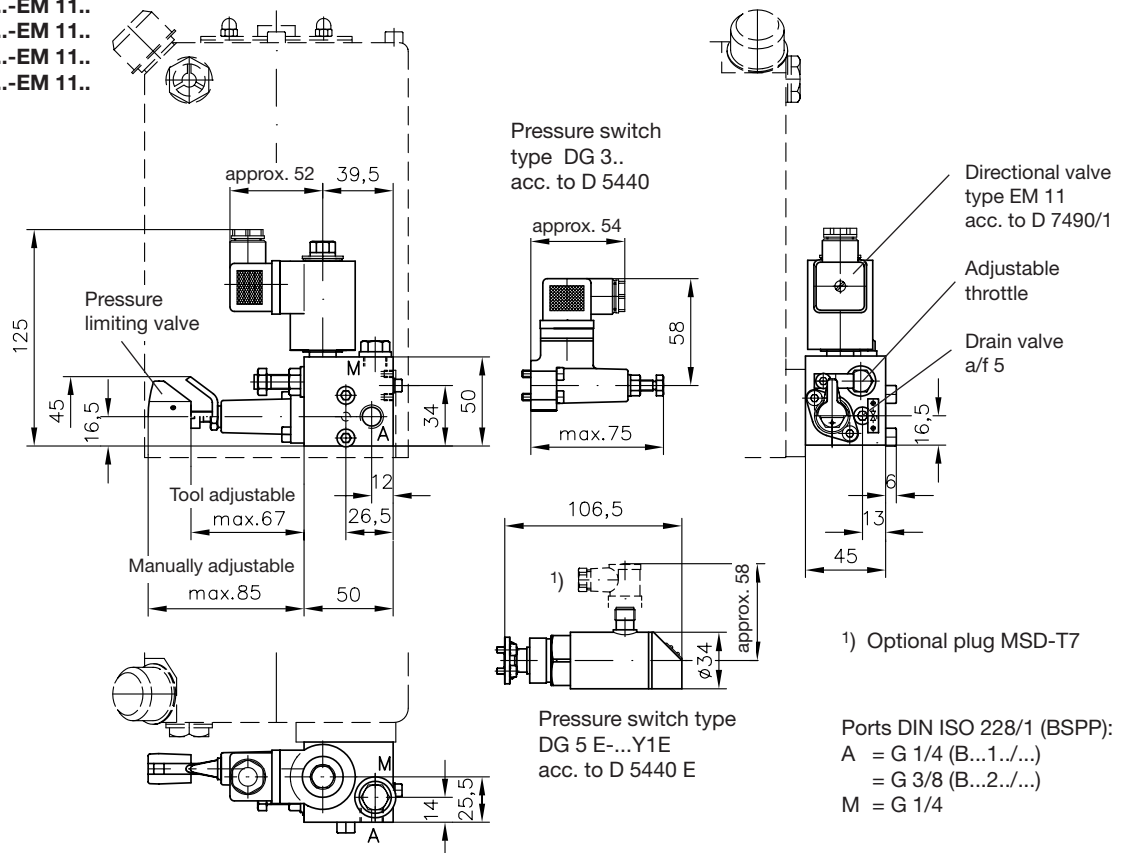


Continuation sect. 4.3

Type **B 31T/..-EM 11..**  
**B 41T/..-EM 11..**

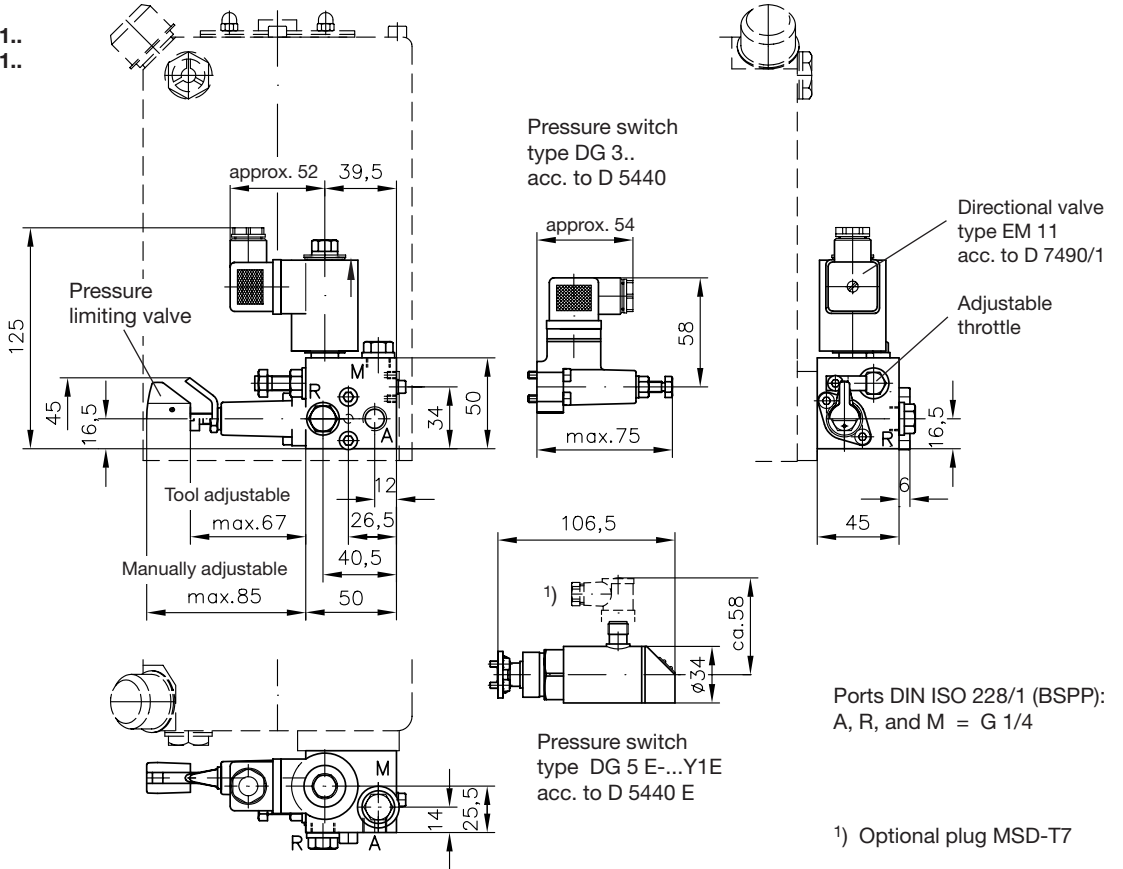

Illustrated here is the installation at compact hydraulic power packs type HK (D 7600 ff)  
The installation onto hydraulic power packs type HC, MP and FP is similar to illustration in sect. 4.1


Type **B 32/..-EM 21..-R6/..**  
**B 42/..-EM 21..-R6/..**

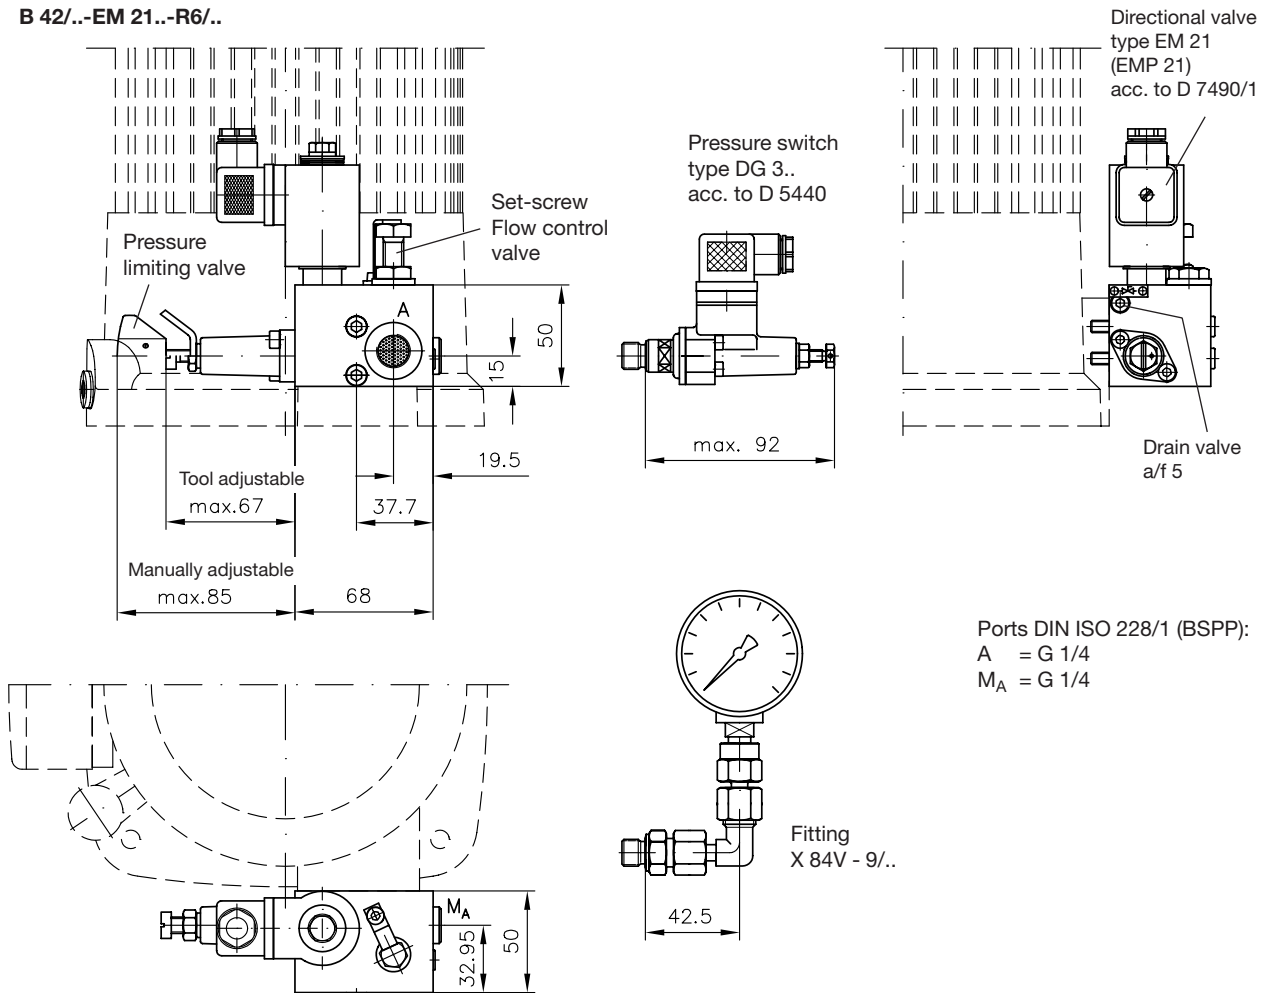

#### 4.4 Connection block type 4 acc. to sect. 2.4

Illustrated here is the installation at compact hydraulic power packs type HC (D 7900)  
The installation onto hydraulic power packs type MP, HK, and FP is similar to illustration in sect. 4.1


##### Type 1/...-DW-10

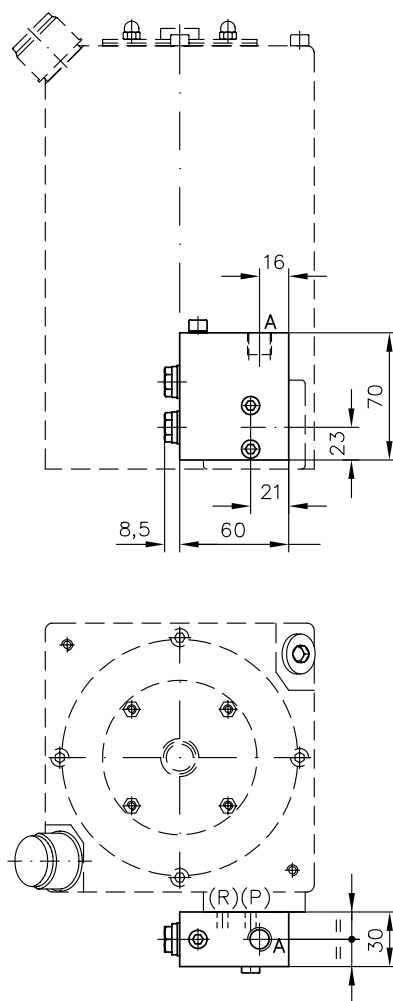

Port A  
DIN ISO 228/1 (BSPP)  
= G 1/4

#### 4.5 Version for pipe connection acc. to sect. 2.5

##### Type C 15(16)-B.../...

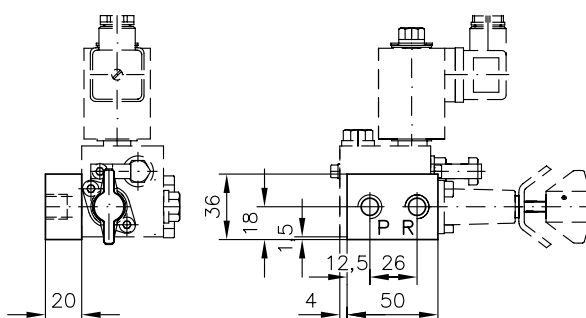

Ports P and R  
DIN ISO 228/1 (BSPP):  
C 15 - B.../... = G 1/4  
C 16 - B.../... = G 3/8