


Stainless Steel ancillary valves


Miniature ball valves from brass hexagonal bar



| Executions | | | |
|----------------------|--------|--------|---------|
| Version | Symbol | Code | Item |
| 1/4" female - female | | 030651 | 2MVSXFF |
| 3/8" female - female | | 030652 | 3MVSXFF |
| 1/2" female - female | | 030653 | 4MVSXFF |
| 1/4" male-female | | 030654 | 2MVSXMF |
| 3/8" male-female | | 030655 | 3MVSXMF |
| 1/2" male-female | | 030656 | 4MVSXMF |

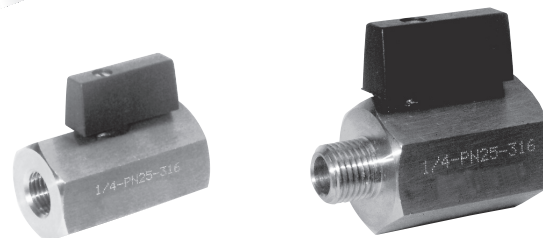

Series of miniature ball valves from stainless steel hexagonal bar and manually operated. In line mounting they work to close or open the flow in both directions. For use in the alimentary and chemical field.

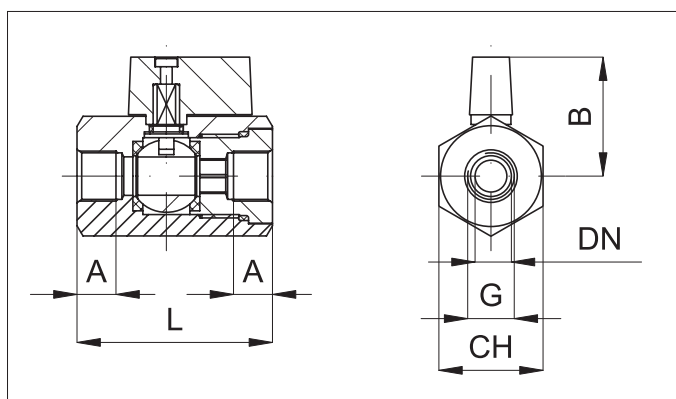

| G | A | B | L | CH | DN | Weight gr FF | Weight gr MF |
|------|----|----|----|----|----|--------------|--------------|
| 1/4" | 10 | 30 | 50 | 27 | 10 | 200 | 170 |
| 3/8" | 10 | 30 | 50 | 27 | 10 | 190 | 165 |
| 1/2" | 10 | 30 | 50 | 27 | 10 | 175 | 160 |

| Technical data | |
|-------------------|---|
| Fluid | Compressed filtered air with or without lubrication. Lubrication, if be used, must be continous. |
| Pressure range | 0 ÷ 25 bar |
| Temperature range | -20 °C ÷ + 150°C |
| Orifice | See the dimension DN in the table |
| Mounting | In-line |
| Materials | <div>Body: Stainless steel AISI 316</div> <div>Lever: Nylon 66, reinforced glass</div> <div>Guarnizioni: PTFE - FKM</div> <div>Ball: Stainless steel AISI 316</div> |