

Foot operated valves ø4, M5 and 1/4”
 1/4”, 3/2 and 5/2 foot single and two stable position





Executions			
Version	Symbol	Code	Item
3/2, normally closed, 1 position with safety device		033127	AVP230
3/2 normally closed, 2 positions with safety device		033128	AVP232
5/2, 1 position with safety device		033129	AVP250
5/2, 2 positions with safety device		033133	AVP251



Series of pedals with 3/2 or 5/2 valve, single and two stable position.
 In the standard version they are provided with 1/4” spool valve and yellow shock-resistant protection in acetal resin and safety device to avoid possible improper actuations.

type: **AVP2...**

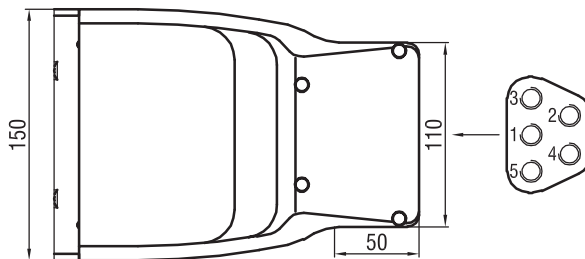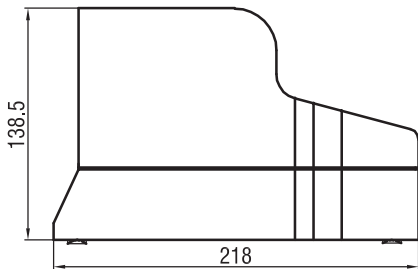

Technical data	
Fluid	Compressed filtered air with or without lubrication. Lubrication, if be used, must be continous.
Pressure range	2,5 ÷ 10 bar
Temperature range	0 °C ÷ + 50 °C
Orifice	8,5 mm
Flow	1000 NI/min
Operating force	50 N
Materials	<div>Housing: Shock-resistant acetal resin</div> <div>Valve body: Profiled anodised aluminium</div> <div>Valve internal parts: Nickel plated brass/Nickel plated aluminium/Stain-less steel - Seals: NBR</div> <div>Protection cover: Shock-resistant acetal resin</div>